


## ■ Features

- Power Rating: 60W
- Input Voltage: 120-277Vac
- Constant current and constant voltage hybrid output
- Output current (240mA-2500mA)
- Programmable with Near Field Communication controller
- Efficiency to 95%
- Compatible with 0-10V, PWM, Timer, Dim-to-off option, 10V/200mA AUX
- UL Class 2 options available, Type HL, Type TL
- SCP, OTP, OCP, and OVP
- IP67
- 5-year warranty
- Surge Protection: Diff: 4kV, Common: 10kV



\*Near Field Communication controller



\*Product images are for illustrative purposes only and may vary from actual design.

## ■ Application

- Indoor and outdoor applications

## ■ Model List\*(See part number scheme for model number details)

Model Number	Input Voltage Range	Output Power	Output Voltage	Output Current Min.	Output Current Max.	Efficiency 110V/220V	Certification
L2WCP060S250ST*-XYZ	120-277Vac	60W	24-36V	1000mA	2500mA	86%/87%	UL/cUL
L2WCP060S167ST*-XYZ	120-277Vac	60W	36-60V	670mA	1670mA	89%/90%	UL/cUL
L2WCP060S100ST*-XYZ	120-277Vac	60W	60-102V	400mA	1000mA	90%/92%	UL/cUL
L2WCP060S059ST*-XYZ	120-277Vac	60W	102-171V	240mA	590mA	91%/92%	UL/cUL

\*Class 2 outputs

Ordering options	
XY= Programmable	Z=Dimming
FC=Near Field Communication	D=DALI Dimming
	B=BLE Dimming

## ■ Technical Data

Input voltage range	120-277Vac
Frequency	47-63Hz
Power factor	> 0.99 @115Vac & 80~100% Full load, > 0.95 @230Vac & 80~100% Full load
Output voltage	24-171V
Output power	60W
Ripple and Noise	3.0%Vo
Max input current	0.6A @115Vac, 0.3A@230Vac
Max input Power	60W
Efficiency	86-92%

**Technical Sales / Customer Service:** +1-818-338-7788 • Email: [sales@autec.com](mailto:sales@autec.com)

31328 Via Colinas Suite 102 • Westlake Village, CA 91362 USA • [www.autec.com](http://www.autec.com)

June 26, 2019

1 / 7

## ■ Technical Data(cont.)

Line Regulation	$\pm 5\%$
Load Regulation	$\pm 3\%$
Inrush Current	65A @230Vac cold start +25°C
Dimming	0~10V/ PWM/ Timer, Dim-to-off option
THD	< 20%
Current Programmable	Yes
Output Current Programmable Range	240-2500mA
Over Current Protection	Protection type: Constant current limiting, recovers automatically after fault condition is removed
Short Current Protection	Hiccup mode, recovers automatically after fault condition is removed
Over Voltage Protection	1.3Vo, Protection type: Hiccup mode, recovers automatically after fault condition is removed
Over Temp. Protection	Hiccup mode, recovers automatically after fault condition is removed
Operating Temperature	-35~+70°C
Max T-case Temp.	90°C
Operating Humidity	10 ~ 100% RH non-condensing
Storage Temp. Humidity	-40 ~+85°C, 5 ~ 100% RH
Temp. Coefficient	$\pm 0.05\%/^{\circ}\text{C}$ (0~50°C)
Vibration	10~500Hz, 5G 12min./1cycle, period for 72min. each along X, Y, Z axes
Dimensions	115x70x37mm 4.5x2.75x1.26 in
Packing	25pcs/carton
Weight	518.2

## ■ Safety Compliance


Safety Standards	UL8750, UL935, UL1012, CSA-C22.2 No.107.1, EN61347-1, EN61347-2-13
Withstand Voltage	I/P – O/P: 3.75kVAC
Isolation Resistance	I/P – O/P: 100M Ohms / 500VDC /25°C / 70% RH
EMC Emission	Compliance to EN55015, EN61000-3-2 Class C ( $\geq 60\%$ load); EN61000-3-3
EMC Immunity	Compliance to EN61000-4-2,3,4,5,6,8,11; EN61547, EN55024

### Disclaimer:


Autec Power Systems' (Autec) LED Drivers are Hi-Pot tested during the manufacturing process. Autec assumes no responsibility for secondary Hi-Pot testing at customer location or designated production line(s). Should customer require further Hi-Pot testing, at their own production line, following assembly of the LED Driver into the customer's assembled fixture, Autec requests advance notice. This request must be communicated to Autec in a timely manner and is recommended to be requested at time of issuing each purchase order.

**Technical Sales / Customer Service:** +1-818-338-7788 • Email: [sales@autec.com](mailto:sales@autec.com)  
 31328 Via Colinas Suite 102 • Westlake Village, CA 91362 USA • [www.autec.com](http://www.autec.com)  
 June 26, 2019  
 2 / 7


### ■ Derating curve

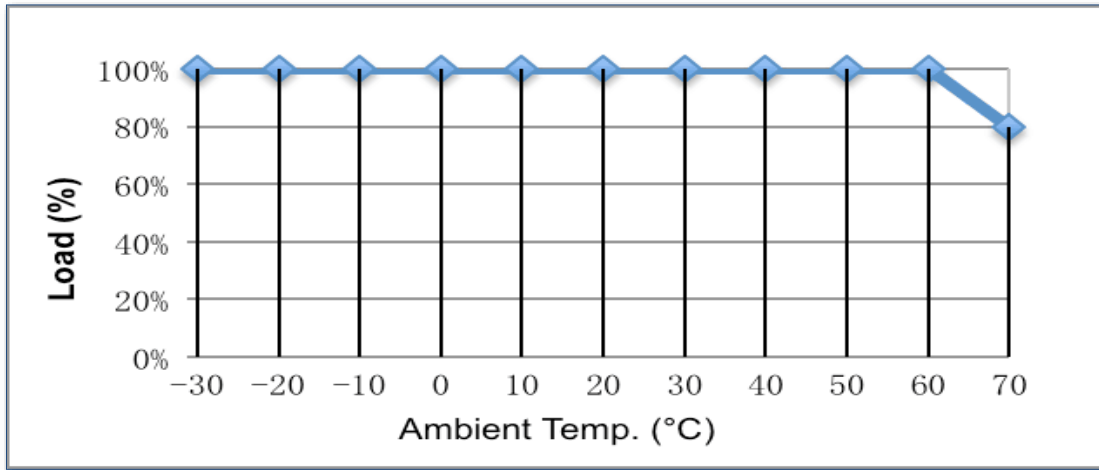

### ■ Static Characteristics

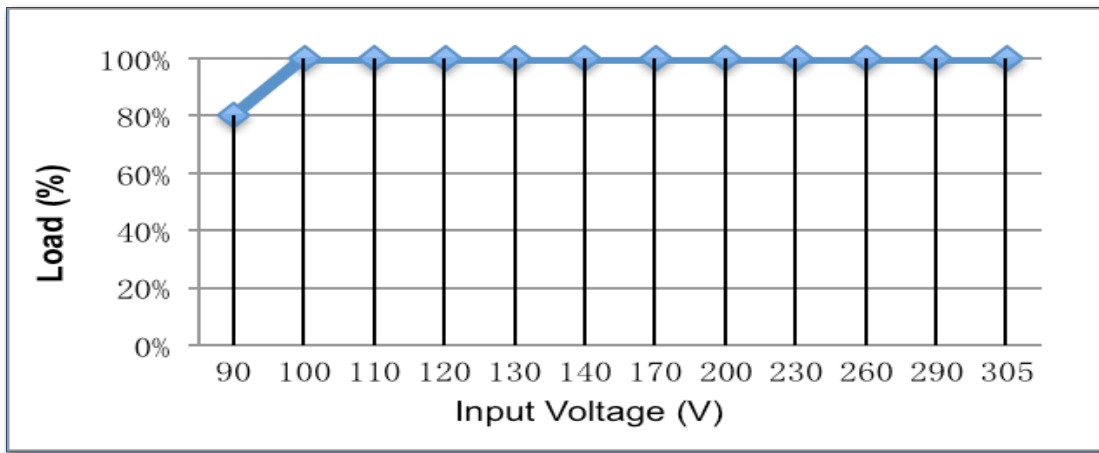

### ■ Power Factor vs. Output

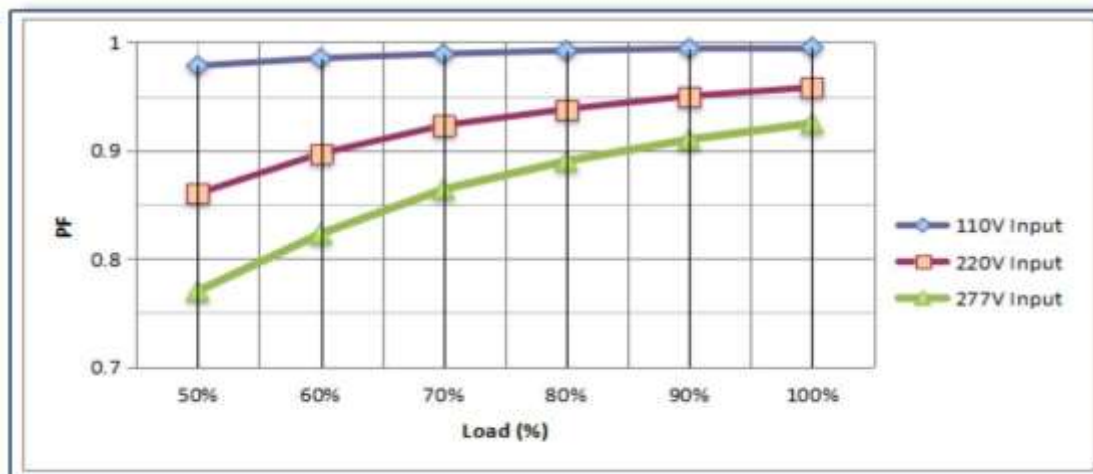


Technical Sales / Customer Service: +1-818-338-7788 • Email: [sales@autec.com](mailto:sales@autec.com)

31328 Via Colinas Suite 102 • Westlake Village, CA 91362 USA • [www.autec.com](http://www.autec.com)


June 26, 2019

3 / 7


### THD vs. Output

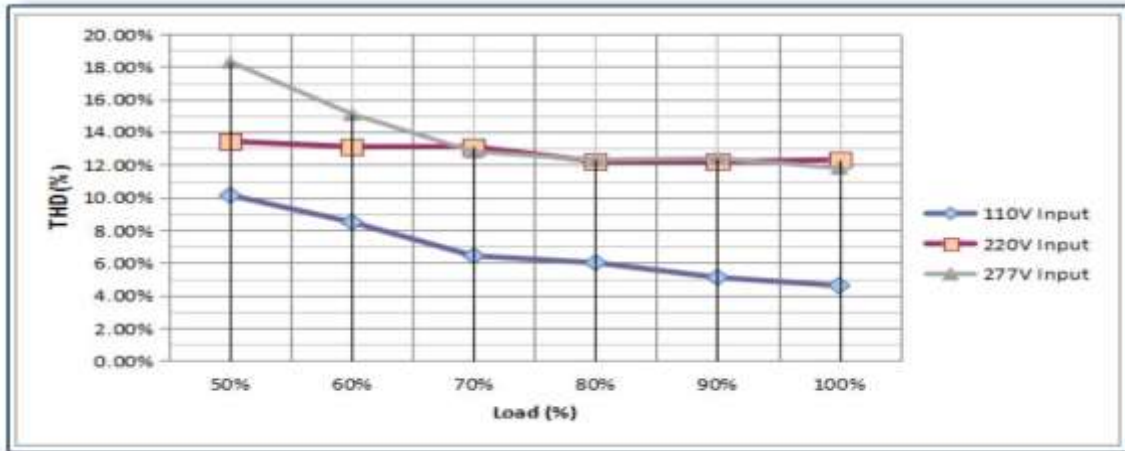

### Efficiency vs Output

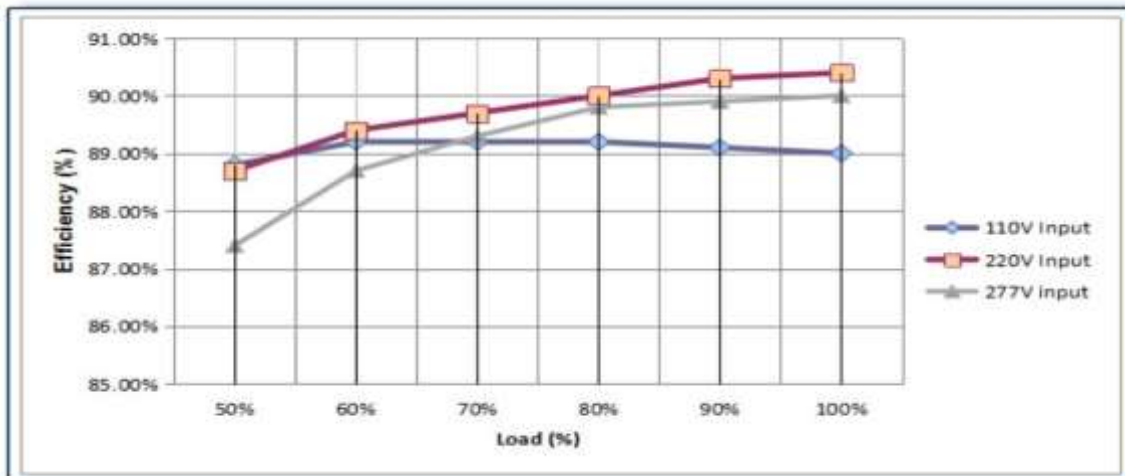

### Lifetime vs Case Temp.

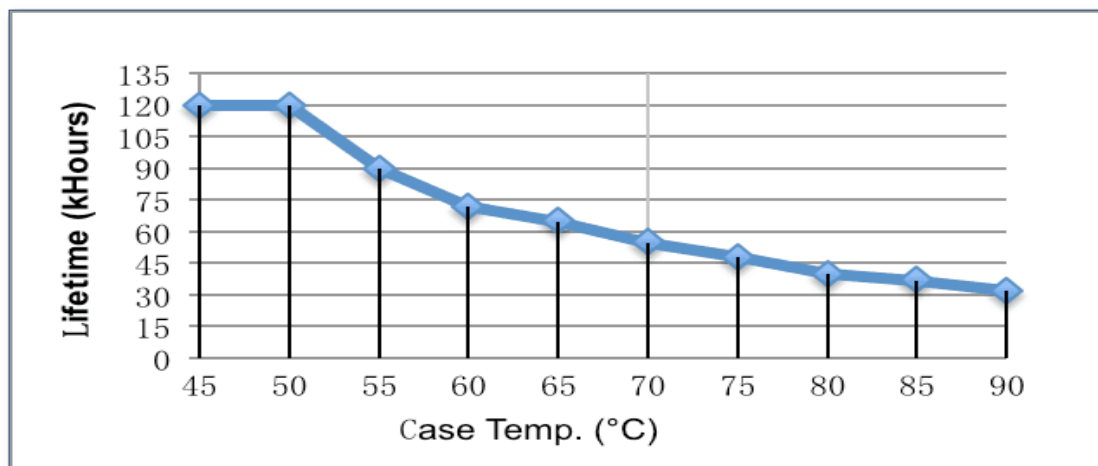

Technical Sales / Customer Service: +1-818-338-7788 • Email: [sales@autec.com](mailto:sales@autec.com)

31328 Via Colinas Suite 102 • Westlake Village, CA 91362 USA • [www.autec.com](http://www.autec.com)

June 26, 2019

4 / 7

## ■ Near Field Communication Controller





### NOTE:

1. The Near Field Communication controller can program the output current, voltage and timer delays.
2. The Near Field Communication programming is a non-contact process, therefore much safer compared to traditional programming methods.
3. Power devices can be programmed without AC power applied to the driver.

## ■ Dimming

### 0-10V Analog Dimming & PWM Dimming

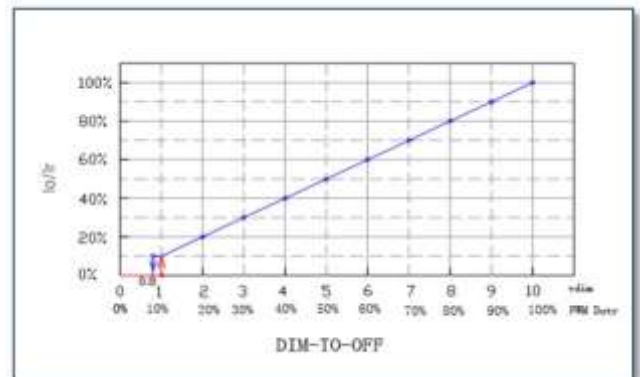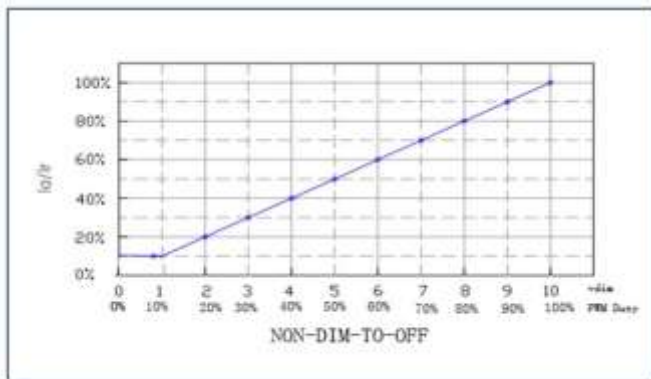

GND	Grey
Dimming wire 0-10V&PWM	Purple
10V AUX	Yellow
Input Dimming Voltage	0-10V
DIM+ Source Current	0-10mA
10V AUX Source Current	20mA
PWM Frequency Range	0.5-3KHZ
PWM high level	10V

### NOTE:

1.  $I_o$  is actual output current and  $I_r$  is rated current without dimming control.
2. For the driver to operate properly, the load voltage must be in the working voltage range.
3. We have DIM-TO-OFF option, which can be programmed by the programmer.
4. Maximum input voltage for the dimming wire is 12V.
5. AUX wire is only for source, can't connect to other voltage source.


**Technical Sales / Customer Service:** +1-818-338-7788 • Email: [sales@autec.com](mailto:sales@autec.com)

31328 Via Colinas Suite 102 • Westlake Village, CA 91362 USA • [www.autec.com](http://www.autec.com)

June 26, 2019

5 / 7


#### PWM Dimming

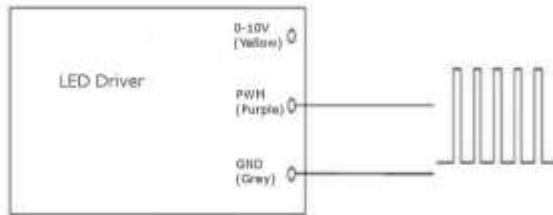


#### TIMER Dimming

##### NOTE:

1. The dimming time can be programmed by the programmer.
2. The time of  $t_1$  and  $t_2$  can be set by the programmer.(0.5h step)
3. The value of  $I_1$  and  $I_2$  can be set by the programmer.
4. Changing the current from  $I_1$  to  $I_2$  may take a few min.

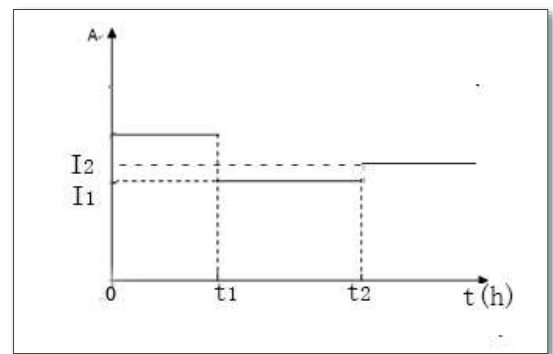

#### ■ Mechanical Design

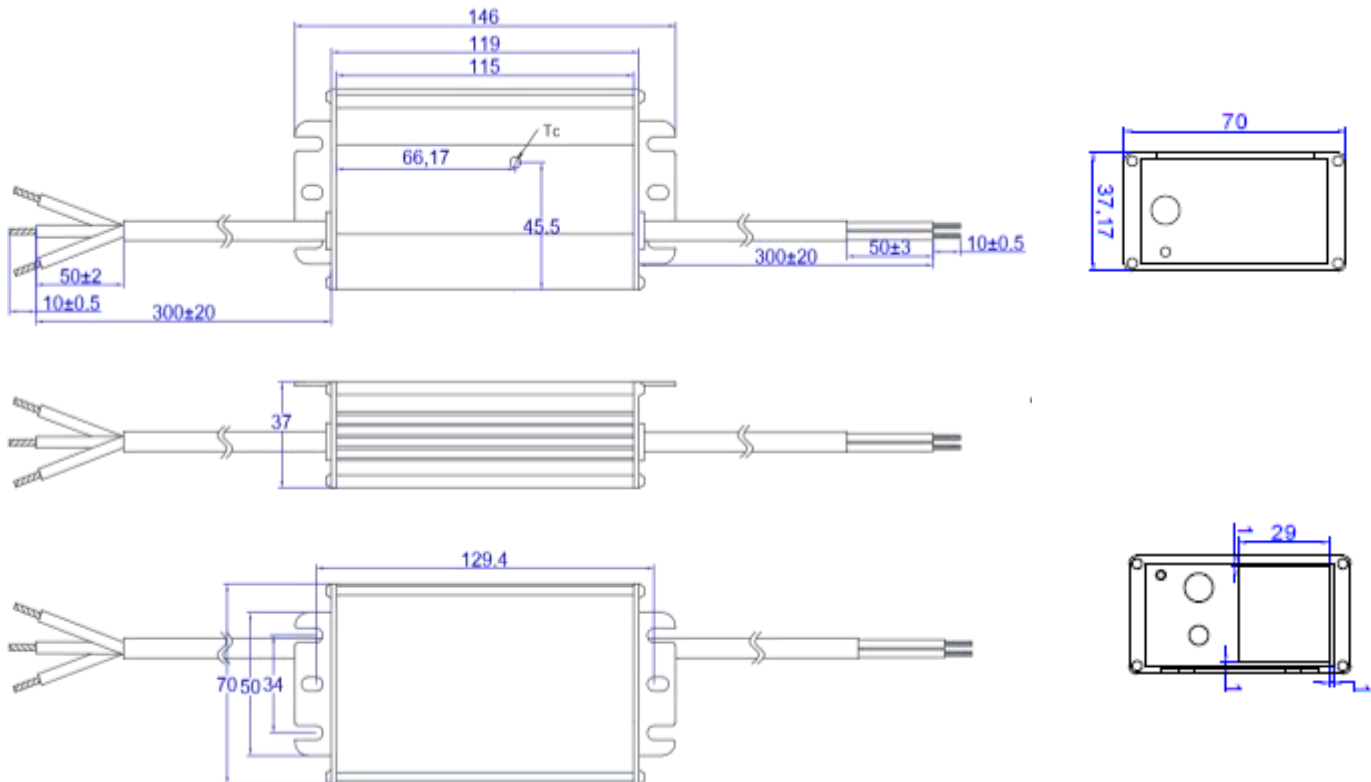


Technical Sales / Customer Service: +1-818-338-7788 • Email: [sales@autec.com](mailto:sales@autec.com)

31328 Via Colinas Suite 102 • Westlake Village, CA 91362 USA • [www.autec.com](http://www.autec.com)

June 26, 2019

6 / 7



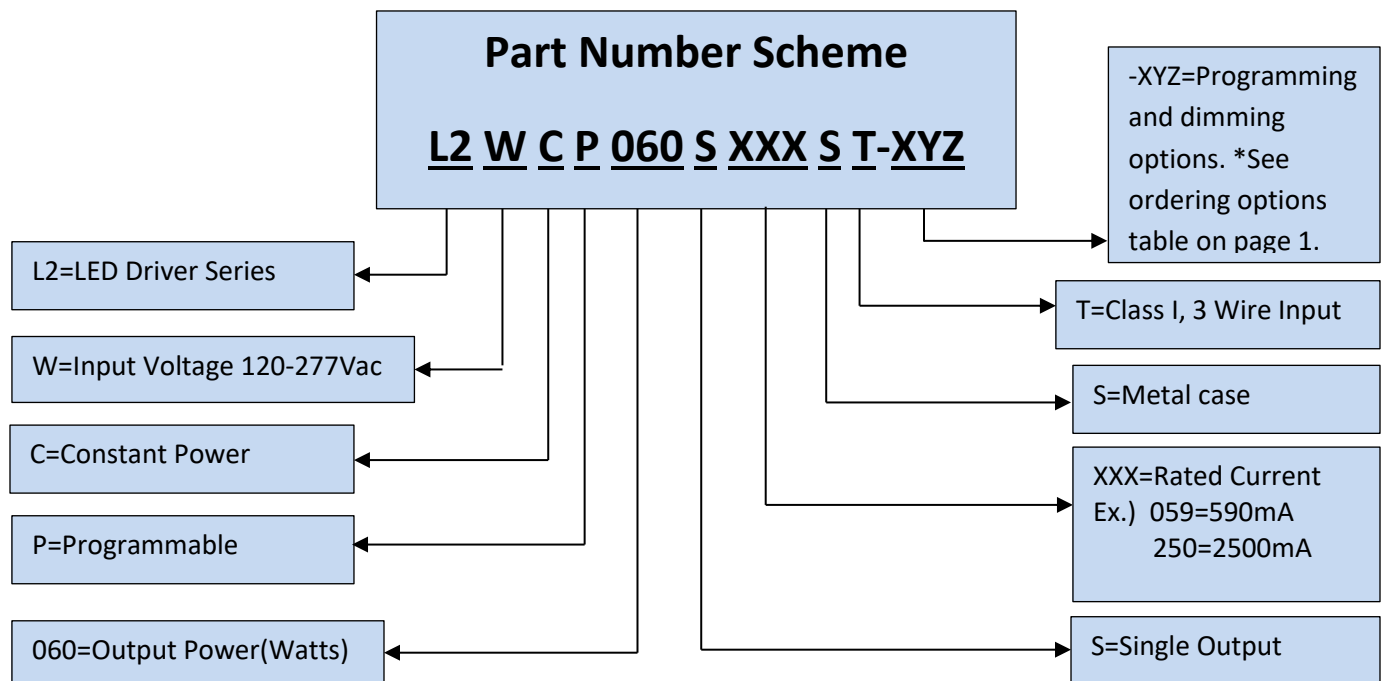

**\*Product images are for illustrative purposes only and may vary from actual design.**

**\*Specifications are subject to change without notice. Autec is not responsible for issues arising from errors or omissions.**

**Technical Sales / Customer Service:** +1-818-338-7788 • Email: [sales@autec.com](mailto:sales@autec.com)

31328 Via Colinas Suite 102 • Westlake Village, CA 91362 USA • [www.autec.com](http://www.autec.com)

June 26, 2019

7 / 7