

Quick Reference

Search by part #

Check distributor part inventory

Products

Browse Products

-By Device -

-By Product Line-

-Attachment Methods

-Interface Materials -

-Accessories -

- Useful Links
- [MSDS Safety Sheets](#)

[How to Order?](#)

[Find Sales Rep](#)

[Find Distributor](#)


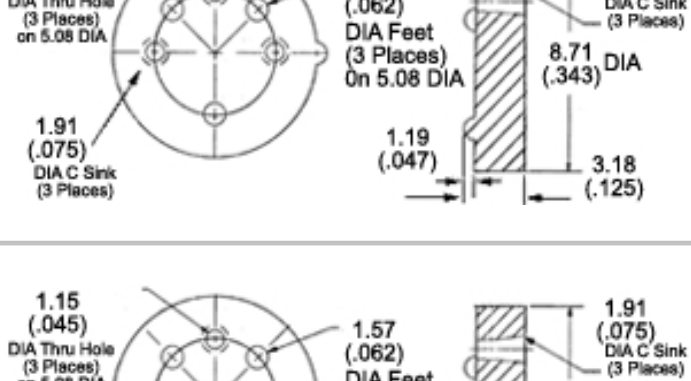

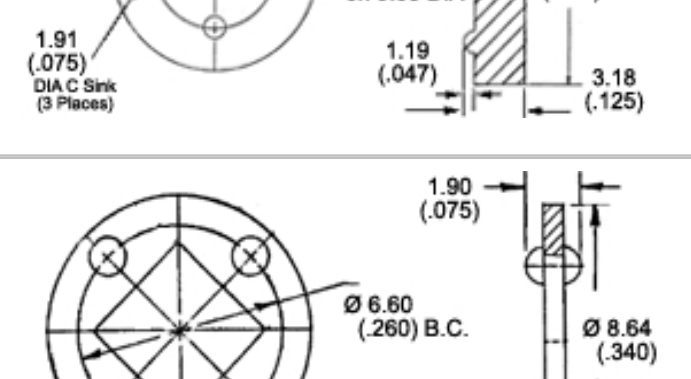

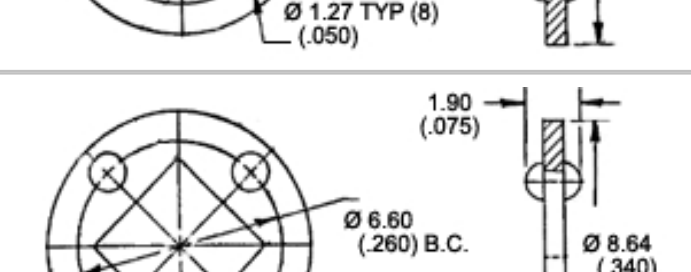

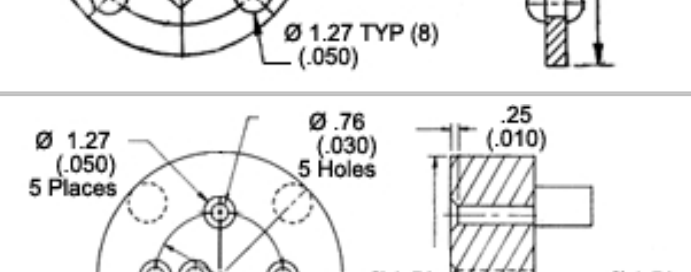

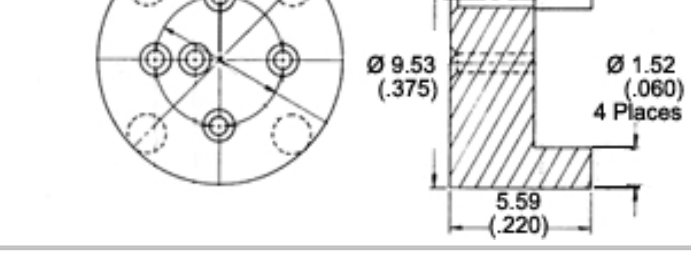

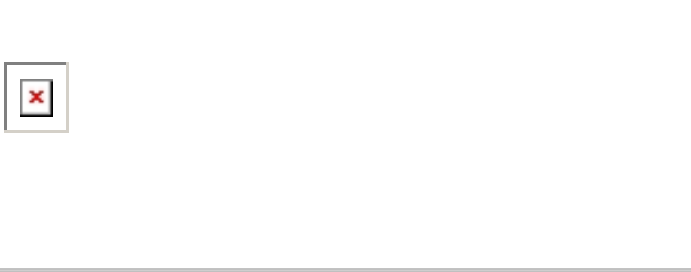

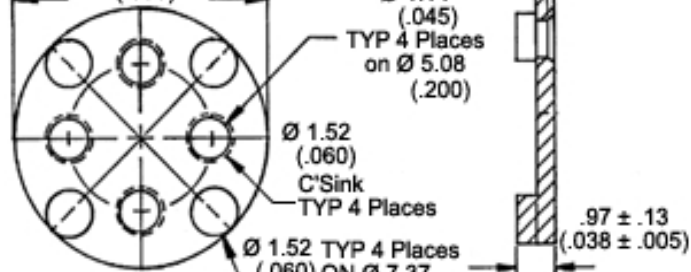

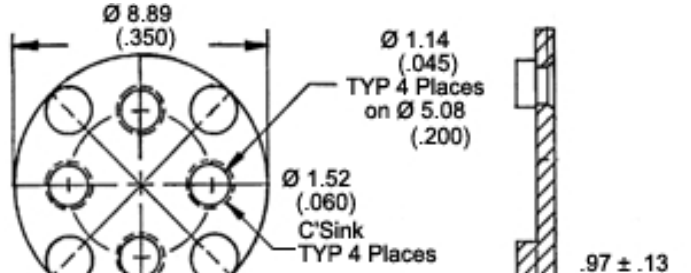

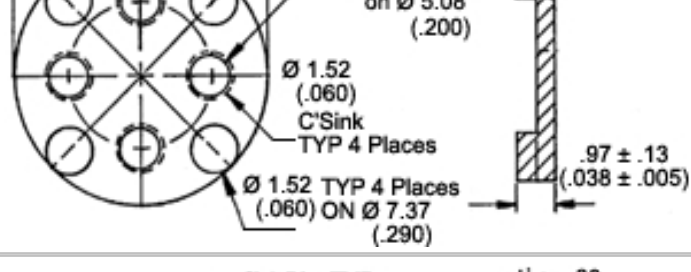

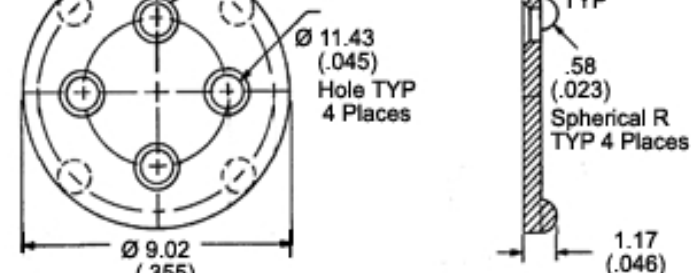

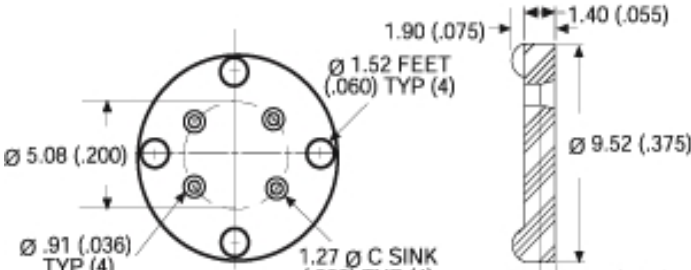

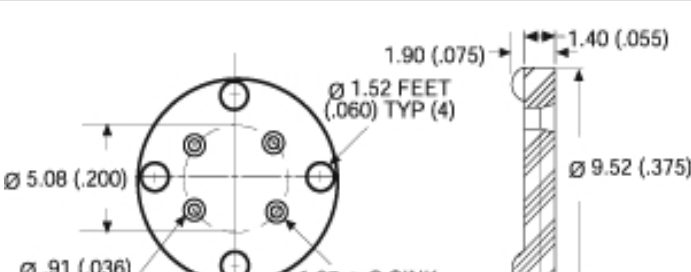

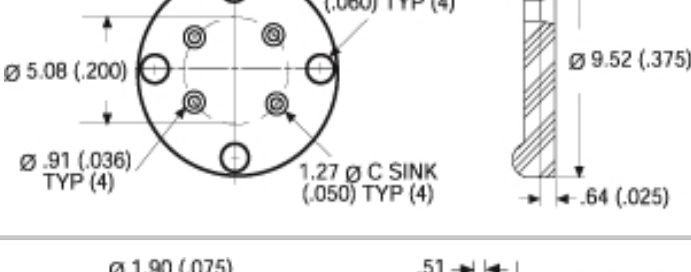

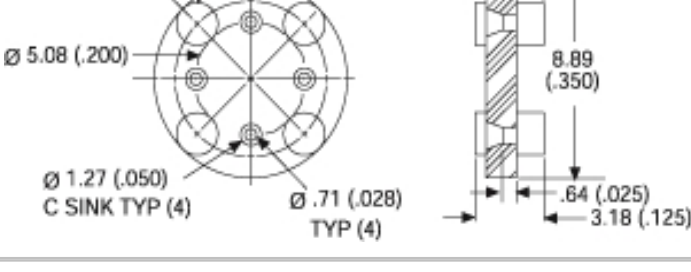

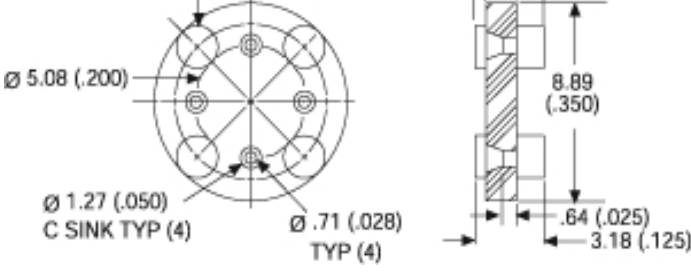

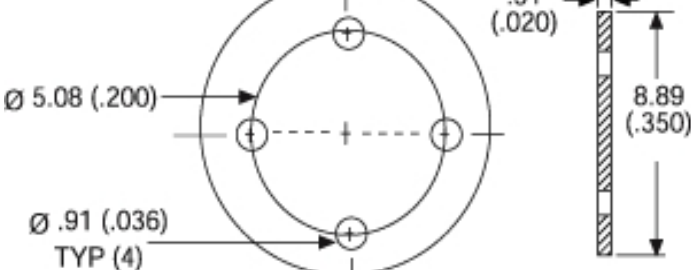

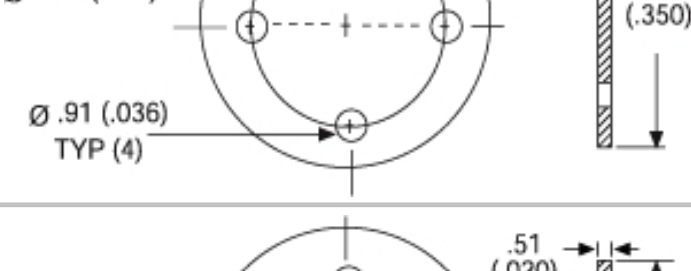

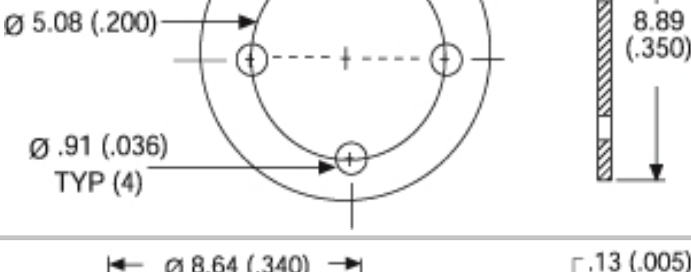

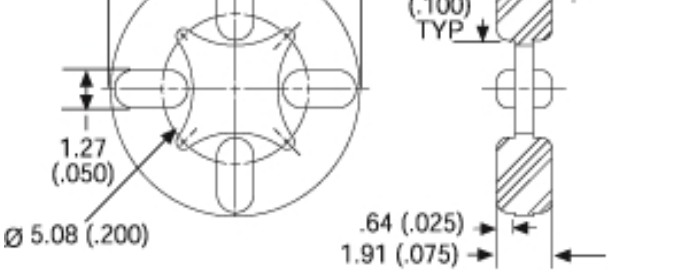

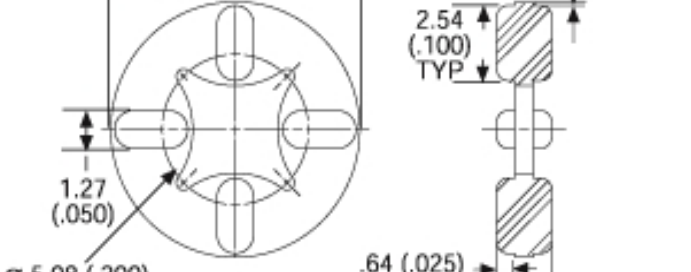

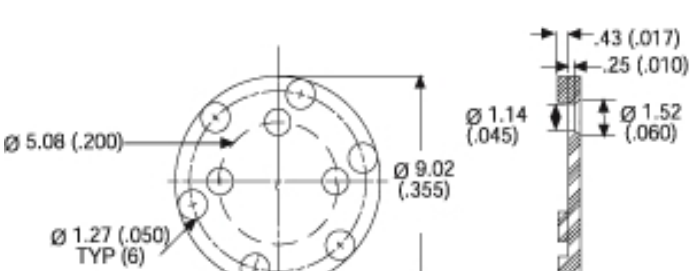

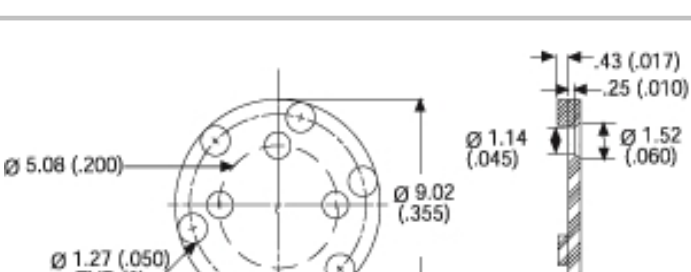

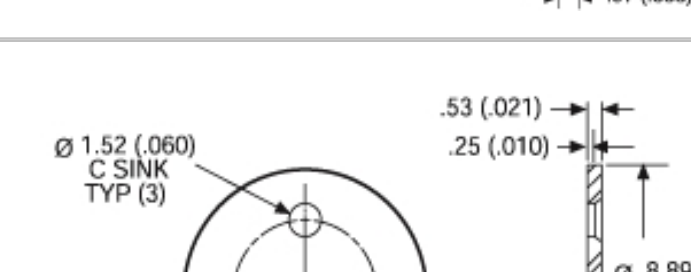

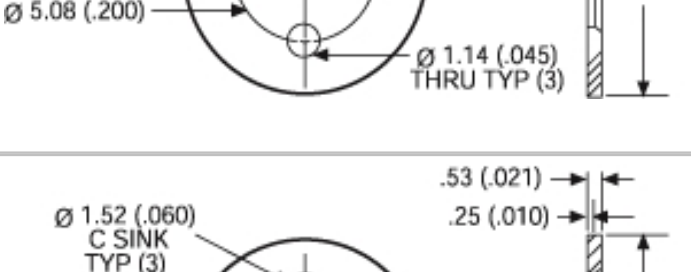

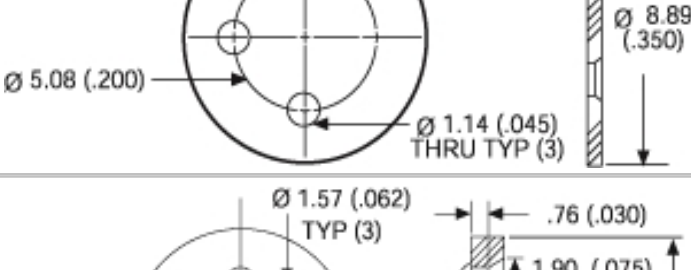

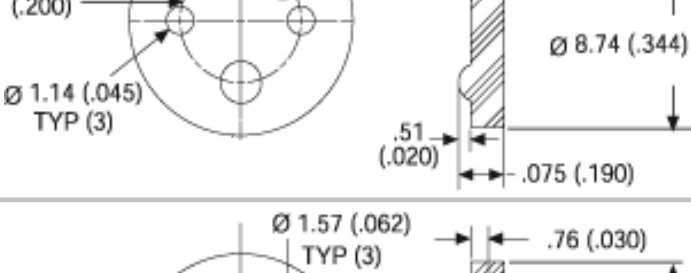

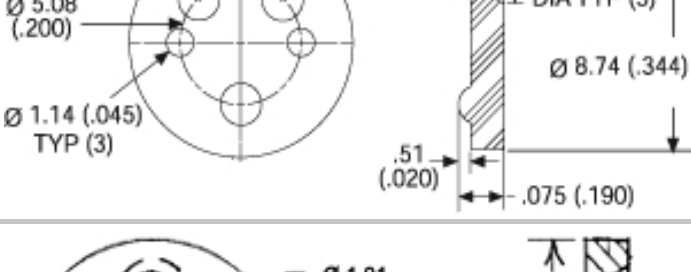

[Sample Request](#)

[Quote Request](#)

[Catalog Request](#)

[Building a Part #](#)

[Part # Cross Ref](#)

Accessories	
Standard Mounting Pads	
The following Mounting Pads are for use with TØ	
<div>RoHS  Compliant</div> <div>7717-167DAPG</div> <div>(DAP)</div> <div>Leads: 3</div> <div>Outside Diameter mm (in): 8.71 (0.343)</div> <div>Thickness: 3.18 (0.125)</div>	
<div>RoHS  Compliant</div> <div>7717-167NG</div> <div>(nylon)</div> <div>Leads: 3</div> <div>Outside Diameter mm (in): 8.71 (0.343)</div> <div>Thickness: 3.18 (0.125)</div>	
<div>RoHS  Compliant</div> <div>7717-161DAPG</div> <div>(DAP)</div> <div>Leads: 4-Mar</div> <div>Outside Diameter mm (in): 8.64 (0.340)</div> <div>Thickness: 1.91 (0.075)</div>	
<div>RoHS  Compliant</div> <div>7717-161NG</div> <div>(nylon)</div> <div>Leads: 4-Mar</div> <div>Outside Diameter mm (in): 8.64 (0.340)</div> <div>Thickness: 1.91 (0.075)</div>	
<div>RoHS  Compliant</div> <div>7717-159NG</div> <div>(nylon)</div> <div>Leads: 5</div> <div>Outside Diameter mm (in): 9.53 (0.375)</div> <div>Thickness: 5.59 (0.220)</div>	
<div>RoHS  Compliant</div> <div>7717-158TG</div> <div>(Teflon)</div> <div>Leads: 4</div> <div>Outside Diameter mm (in): 9.91 (0.390)</div> <div>Thickness: 0.25 (0.010)</div>	
<div>RoHS  Compliant</div> <div>7717-131DAPG</div> <div>(DAP)</div> <div>Leads: 4</div> <div>Outside Diameter mm (in): 8.89 (0.350)</div> <div>Thickness: 0.97 (0.038)</div>	
<div>RoHS  Compliant</div> <div>7717-131NG</div> <div>(nylon)</div> <div>Leads: 4</div> <div>Outside Diameter mm (in): 8.89 (0.350)</div> <div>Thickness: 0.97 (0.038)</div>	
<div>RoHS  Compliant</div> <div>7717-114NG</div> <div>(nylon)</div> <div>Leads: 4</div> <div>Outside Diameter mm (in): 9.02 (0.355)</div> <div>Thickness: 1.17 (0.046)</div>	
<div>RoHS  Compliant</div> <div>7717-4DAPG</div> <div>(DAP)</div> <div>Leads: 4</div> <div>Outside Diameter mm (in): 9.53 (0.375)</div> <div>Thickness: 1.91 (0.075)</div>	
<div>RoHS  Compliant</div> <div>7717-4NG</div> <div>(nylon)</div> <div>Leads: 4</div> <div>Outside Diameter mm (in): 9.53 (0.375)</div> <div>Thickness: 1.91 (0.075)</div>	
<div>RoHS  Compliant</div> <div>7717-5DAPG</div> <div>(DAP)</div> <div>Leads: 4</div> <div>Outside Diameter mm (in): 8.89 (0.350)</div> <div>Thickness: 3.18 (0.125)</div>	
<div>RoHS  Compliant</div> <div>7717-5NG</div> <div>(nylon)</div> <div>Leads: 4</div> <div>Outside Diameter mm (in): 8.89 (0.350)</div> <div>Thickness: 3.18 (0.125)</div>	
<div>RoHS  Compliant</div> <div>7717-15DAPG</div> <div>(DAP)</div> <div>Leads: 4</div> <div>Outside Diameter mm (in): 8.89 (0.350)</div> <div>Thickness: 0.51 (0.020)</div>	
<div>RoHS  Compliant</div> <div>7717-15NG</div> <div>(nylon)</div> <div>Leads: 4</div> <div>Outside Diameter mm (in): 8.89 (0.350)</div> <div>Thickness: 0.51 (0.020)</div>	
<div>RoHS  Compliant</div> <div>7717-3DAPG</div> <div>(DAP)</div> <div>Leads: 4-Mar</div> <div>Outside Diameter mm (in): 8.71 (0.343)</div> <div>Thickness: 1.91 (0.075)</div>	
<div>RoHS  Compliant</div> <div>7717-3NG</div> <div>(nylon)</div> <div>Leads: 4-Mar</div> <div>Outside Diameter mm (in): 8.71 (0.343)</div> <div>Thickness: 1.91 (0.075)</div>	
<div>RoHS  Compliant</div> <div>7717-79DAPG</div> <div>(DAP)</div> <div>Leads: 3</div> <div>Outside Diameter mm (in): 9.02 (0.355)</div> <div>Thickness: 0.97 (0.038)</div>	
<div>RoHS  Compliant</div> <div>7717-79NG</div> <div>(nylon)</div> <div>Leads: 3</div> <div>Outside Diameter mm (in): 9.02 (0.355)</div> <div>Thickness: 0.97 (0.038)</div>	
<div>RoHS  Compliant</div> <div>7717-178DAPG</div> <div>(DAP)</div> <div>Leads: 3</div> <div>Outside Diameter mm (in): 8.89 (0.350)</div> <div>Thickness: 0.53 (0.021)</div>	
<div>RoHS  Compliant</div> <div>7717-178NG</div> <div>(nylon)</div> <div>Leads: 3</div> <div>Outside Diameter mm (in): 8.89 (0.350)</div> <div>Thickness: 0.53 (0.021)</div>	
<div>RoHS  Compliant</div> <div>7717-86DAPG</div> <div>(DAP)</div> <div>Leads: 3</div> <div>Outside Diameter mm (in): 8.71 (0.343)</div> <div>Thickness: 1.91 (0.075)</div>	
<div>RoHS  Compliant</div> <div>7717-86NG</div> <div>(nylon)</div> <div>Leads: 3</div> <div>Outside Diameter mm (in): 8.71 (0.343)</div> <div>Thickness: 1.91 (0.075)</div>	
<div>RoHS  Compliant</div> <div>7717-22NG</div> <div>(DAP)</div> <div>Leads: 3</div> <div>Outside Diameter mm (in): 8.71 (0.343)</div> <div>Thickness: 1.91 (0.075)</div>	
<div>RoHS  Compliant</div> <div>7717-22DAPG</div> <div>(DAP)</div> <div>Leads: 3</div> <div>Outside Diameter mm (in): 8.71 (0.343)</div> <div>Thickness: 1.91 (0.075)</div>	
<div>RoHS  Compliant</div> <div>7717-238NG</div> <div>(nylon)</div> <div>Leads: 4-Mar</div> <div>Outside Diameter mm (in): 10.16 (0.400)</div> <div>Thickness: 4.06 (0.160)</div>	
<div>RoHS  Compliant</div> <div>7717-300NG</div> <div>(nylon)</div> <div>Leads: Universal</div> <div>Outside Diameter mm (in): 11.18 (0.440)</div> <div>Thickness: 9.65 (0.380)</div>	
<div>RoHS  Compliant</div> <div>7717-94NG</div> <div>(nylon)</div> <div>Leads: 4-Mar</div> <div>Outside Diameter mm (in): 8.89 (0.350)</div> <div>Thickness: 0.97 (0.038)</div>	