


Power Schottky Rectifier with common cathode

I_{FAV} = 15 A
V_{RRM} = 100 V
V_F = 0.64 V

V _{RSM}	V _{RRM}	Type
V	V	
100	100	DSSK 28-01AS



TO-263 AB



A = Anode, C = Cathode , TAB = Cathode

Symbol	Conditions	Maximum Ratings		
I _{FRMS}		35		A
I _{FAV}	T _C = 160°C; rectangular, d = 0.5	2x15		A
I _{FSM}	T _{VJ} = 45°C; t _p = 10 ms (50 Hz), sinev	230		A
E _{AS}	I _{AS} = 10 A; L = 100 µH; T _{VJ} = 25°C; non repetitive	5	mJ	
I _{AR}	V _A = 1.5 • V _{RRM} typ.; f=10 kHz; repetitive	1		A
(dv/dt) _{cr}		5000	V/µs	
T _{VJ}		-55...+175		°C
T _{VJM}		175		°C
T _{stg}		-55...+150		°C
P _{tot}	T _C = 25°C	105		W
F _c	mounting force	20...60		N
Weight	typical	2		g

Features

- International standard package
- Very low V_F
- Extremely low switching losses
- Low I_{RM}-values
- Epoxy meets UL 94V-0

Applications

- Rectifiers in switch mode power supplies (SMPS)
- Free wheeling diode in low voltage converters

Advantages

- High reliability circuit operation
- Low voltage peaks for reduced protection circuits
- Low noise switching
- Low losses

Dimensions see Outlines.pdf

Symbol	Conditions	Characteristic Values	
		typ.	max.
I _R ①	V _R = V _{RRM} ; T _{VJ} = 25°C V _R = V _{RRM} ; T _{VJ} = 125°C	0.5 5	mA mA
V _F	I _F = 15 A; T _{VJ} = 125°C I _F = 15 A; T _{VJ} = 25°C I _F = 30 A; T _{VJ} = 125°C	0.64 0.82 0.78	V V V
R _{thJC}		1.4	K/W

Pulse test: Pulse Width = 5 ms, Duty Cycle < 2.0 %

Data according to IEC 60747 and per diode unless otherwise specified

IXYS reserves the right to change limits, conditions and dimensions.

© 2008 IXYS All rights reserved

20080612a

1 - 2

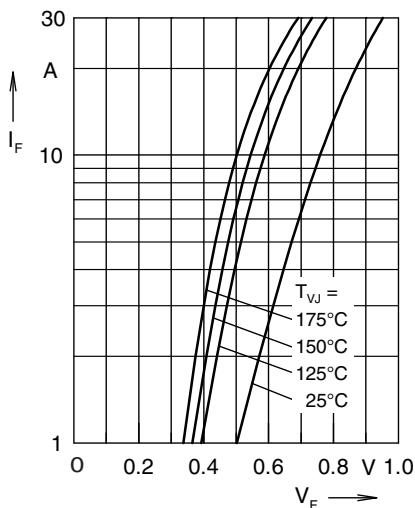


Fig. 1 Max. forward voltage drop characteristics

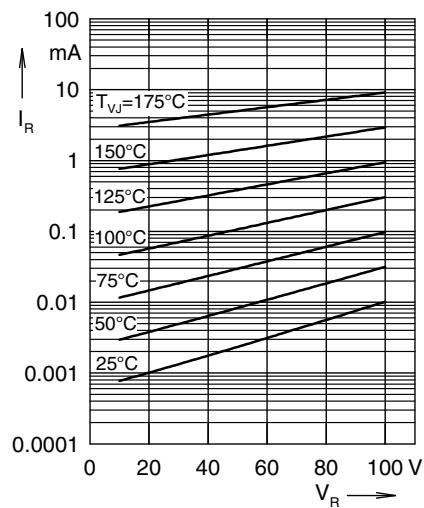


Fig. 2 Typ. reverse current I_R vs. reverse voltage V_R

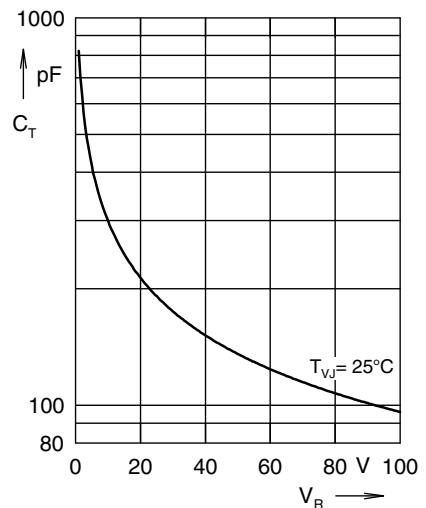


Fig. 3 Typ. junction capacitance C_T versus reverse voltage V_R

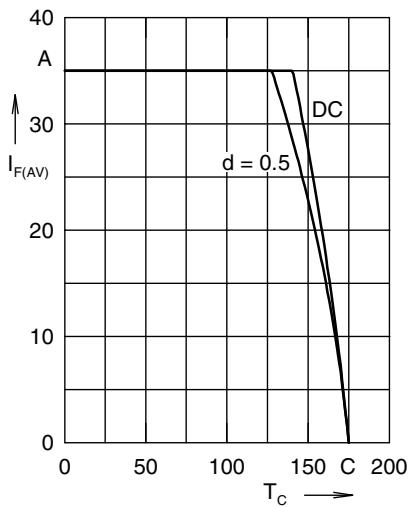


Fig. 4 Avg. forward current $I_{F(AV)}$ vs. case temperature T_C

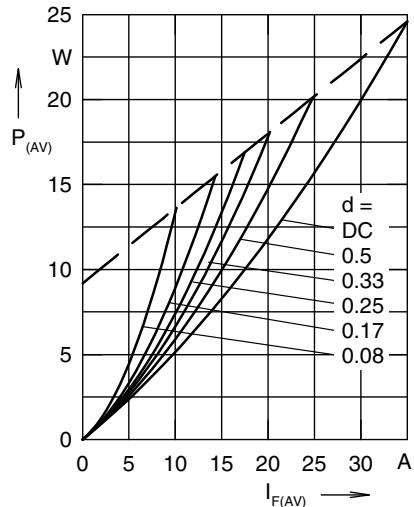


Fig. 5 Forward power loss characteristics

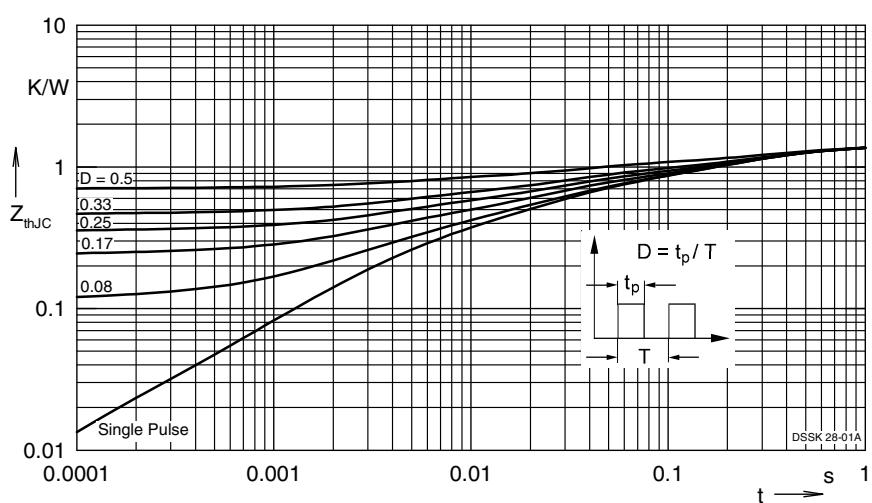


Fig. 6 Transient thermal impedance junction to case at various duty cycles

Note: All curves are per diode