



# PanelMatch™ StayLit™ LXMG1626-12-45

12V Dual 6W CCFL Programmable Inverter Module

## PRODUCTION DATASHEET

### DESCRIPTION

The LXMG1626-12-45 is a Dual 6W Output Direct Drive™ CCFL (Cold Cathode Fluorescent Lamp) Inverter Module specifically designed to be compatible with variety of LCD panels that have both lamps on one side of the panel and use a single common lamp return wire.

LXMG1626 modules provide the designer with a superior display brightness range. This brightness range is achievable with virtually any LCD display.

The modules are available with a dimming input that permits brightness control from either, a DC voltage source, a PWM signal or external potentiometer.

The maximum output current is externally programmable (through the input connector) at either 10mA or 12mA (5mA or 6mA per lamp). This allows the inverter to match the panel's lamp current specifications, or it can be used to purposely drive the lamps at a lower or higher current to decrease or increase nominal brightness. The inverter also has a dedicated FAULT pin that indicates an open/shorted lamp condition.

In addition when only one of the two lamps in the LCD fails open, the second lamp will continue to operate with a FAULT signal toggling to indicate the failed condition, StayLit™ feature.

The RangeMAX™ Digital Dimming Technique provides flicker-free brightness control in any wide range (typically 100:1+) dimming application.

The resultant "burst drive" that energizes the lamp is designed specifically to ensure that no premature lamp degradation occurs, while allowing significant power savings at lower dim levels.

The design utilizes Microsemi's highly integrated LX1691B backlight controller to convert DC voltage from the system battery or AC adapter directly to high frequency, high-voltage waves required to ignite and operate CCFL lamps.

Other benefits of this new topology are stable fixed-frequency operation, secondary-side strike-voltage regulation and both open/shorted lamp protection with fault timeout.

**IMPORTANT:** For the most current data, consult MICROSEMI's website: <http://www.microsemi.com>  
Protected By U.S. Patents: 5,923,129; 5,930,121; 6,198,234; Patents Pending

### KEY FEATURES

- Externally Programmable Maximum Output Current
- Easy to Use Brightness Control
- RangeMAX™ Wide Range Dimming
- Output Open & Short-Circuit Protection and Automatic Strike-Voltage Regulation and Timeout
- StayLit™ Continued Operation with Single Open Lamp Failure
- Fixed Frequency Operation
- Fault Output Signal
- Rated From -30°C to 80°C
- RoHS Compliant
- UL60950 E175910


### APPLICATIONS

- Dual Lamp LCD's Requiring a Shared Common Lamp Return
- Mates to a Single JST BHR-04 VS-1 Lamp Connector
- Industrial Display Controls

### BENEFITS

- Smooth, Flicker Free 1% - 100% Full-Range Brightness Control
- Programmable Output Current Allows Inverter to Mate With a Wide Variety of LCD Panel's Specifications
- Output Open Circuit Voltage Regulation Minimizes Corona Discharge For High Reliability

### PRODUCT HIGHLIGHT

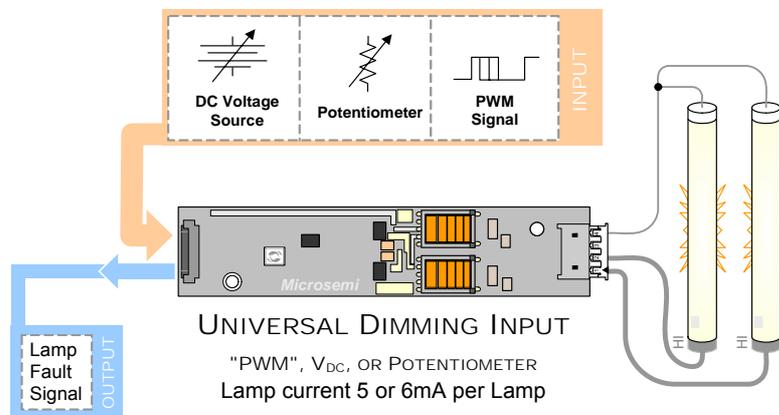

### PACKAGE ORDER INFO

| PART NUMBER    | OUTPUT CONNECTOR   | INVERTER MATES DIRECTLY TO PANEL CONNECTORS |
|----------------|--|---|
| LXMG1626-12-45 | JST SM04(4.0)B-BHS-1-TB(LF)(SN), Yeon Ho 20015WR-07A00 or equivalent | JST BHR-04VS-1                              |



**ABSOLUTE MAXIMUM RATINGS**

|   |       |  |
|---|-------|--|
| Input Signal Voltage (V <sub>IN</sub> )     | ..... | -0.3V to 15V                               |
| Input Power                                 | ..... | 8W   |
| Output Voltage, no load                     | ..... | Internally Limited to 1500V <sub>RMS</sub> |
| Output Current (per lamp)                   | ..... | 6.6mA <sub>RMS</sub> (Internally Limited)  |
| Output Power                                | ..... | 6W   |
| Input Signal Voltage (SLEEP Input)          | ..... | -0.3V to 13.2V                             |
| Input Signal Voltage (BRITE)                | ..... | -0.3V to 5.5V                              |
| Ambient Operating Temperature, zero airflow | ..... | -30°C to 80°C                              |
| Operating Relative Humidity, non-condensing | ..... | ≤90%                                       |
| Storage Temperature Range                   | ..... | -40°C to 85°C                              |

Exceeding these ratings could cause damage to the device. All voltages are with respect to Ground. Currents are positive into, negative out of specified terminal.

**RECOMMENDED OPERATING CONDITIONS (R.C.)**

This module has been designed to operate over a wide range of input and output conditions. However, best efficiency and performance will be obtained if the module is operated under the condition listed in the 'R.C.' column. Min. and Max. columns indicate values beyond which the inverter, although operational, will not function optimally.

| Parameter   | Symbol               | Recommended Operating Conditions |      |      | Units                          |
|---|----------------------|----------------------------------|------|------|--------------------------------|
|   |                      | Min                              | R.C. | Max  |                                |
| Input Supply Voltage Range (Fully Regulated Lamp Current) | V <sub>IN</sub>      | 10.8                             | 12   | 13.2 | V                              |
| Input Supply Voltage Range (Functional)                   |                      | 10.2                             | 12   | 13.6 |                                |
| Output Power  | P <sub>O</sub>       |                                  | 4.5  | 5.5  | W                              |
| Linear BRITE Control Input Voltage Range                  | V <sub>BRT_ADJ</sub> | 0                                |      | 2.0  | V                              |
| Lamp Operating Voltage                                    | V <sub>LAMP</sub>    | 385                              | 435  | 485  | V <sub>RMS</sub> <sup>1</sup>  |
| Lamp Current (Full Brightness, per Lamp)                  | I <sub>O(LAMP)</sub> | 5.0                              |      | 6.0  | mA <sub>RMS</sub> <sup>2</sup> |
| Operating Ambient Temperature Range                       | T <sub>A</sub>       | -30                              |      | 80   | °C                             |

<sup>1</sup> Based on single lamp voltage measurement, use of lamps outside of this range may result in false triggering of the fault detection circuitry.

<sup>2</sup> At input voltages below 12V the inverter may not be able to output the full 6mA<sub>RMS</sub> per lamp in all configurations.

**ELECTRICAL CHARACTERISTICS**

Unless otherwise specified, the following specifications apply over the recommended operating condition and ambient temperature of 0°C to 60°C except where otherwise noted.

| Parameter                             | Symbol              | Test Conditions   | LXMG1626-12-45 |      |     | Units             |
|---------------------------------------|---------------------|---|----------------|------|-----|-------------------|
|                                       |                     |   | Min            | Typ  | Max |                   |
| <b>OUTPUT PIN CHARACTERISTICS</b>     |                     |   |                |      |     |                   |
| Full Bright Lamp Current (two lamps)  | I <sub>L(MAX)</sub> | V <sub>BRT_ADJ</sub> ≥ 2.0V, SLEEP ≥ 2.0V, V <sub>IN</sub> = 12V<br>I <sub>SET</sub> = Ground   | 9              | 10   | 11  | mA <sub>RMS</sub> |
| Full Bright Lamp Current (two lamps)  | I <sub>L(MAX)</sub> | V <sub>BRT_ADJ</sub> ≥ 2.0V, SLEEP ≥ 2.0V, V <sub>IN</sub> = 12V<br>I <sub>SET</sub> = Open   | 11             | 12   | 13  | mA <sub>RMS</sub> |
| Output Current Lamp to Lamp Deviation | I <sub>LL%DEV</sub> | V <sub>BRT_ADJ</sub> ≥ 2.0V, SLEEP ≥ 2.0V, V <sub>IN</sub> = 12V<br>I <sub>SET</sub> = Open   |                | 5    |     | %                 |
| Min. Average Lamp Current             | I <sub>L(MIN)</sub> | V <sub>BRT_ADJ</sub> = 0V, SLEEP ≥ 2.0V, V <sub>IN</sub> = 12V<br>I <sub>SET</sub> = Ground; I <sub>OUT</sub> = I <sub>MAX</sub> * SQRT of % duty cycle |                | 1.6  |     | mA <sub>RMS</sub> |
| Lamp Start Voltage                    | V <sub>LS</sub>     | V <sub>IN</sub> > 10.8V   | 1250           | 1400 |     | V <sub>RMS</sub>  |
| Operating Frequency                   | f <sub>O</sub>      | V <sub>BRT_ADJ</sub> = 2.0V, SLEEP ≥ 2.0V, V <sub>IN</sub> = 12V  | 55.2           | 57.6 | 60  | kHz               |
| Burst Frequency                       | f <sub>BURST</sub>  | Output Burst Frequency  | 215            | 225  | 235 | Hz                |
| FAULT Output Voltage High             | FAULT <sub>VH</sub> | FAULT = -10uA   | 3              | 3.5  |     | V                 |
| FAULT Output Voltage Low              | FAULT <sub>VL</sub> | FAULT = 10uA  |                | 0.3  | 0.8 | V                 |



**ELECTRICAL CHARACTERISTICS (CONTINUED)**

Unless otherwise specified, the following specifications apply over the recommended operating condition and ambient temperature of 0°C to 60°C except where otherwise noted.

| Parameter                           | Symbol         | Test Conditions  | LXMG1626-12-45 |      |          | Units   |
|-------------------------------------|----------------|--|----------------|------|----------|---------|
|                                     |                |  | Min            | Typ  | Max      |         |
| <b>BRITE INPUT</b>                  |                |  |                |      |          |         |
| Input Current                       | $I_{BRT}$      | $V_{BRT\_ADJ} = 0V$  |                | -13  |          | $\mu A$ |
|                                     |                | $V_{BRT\_ADJ} = 3V$  |                | 1    |          | $\mu A$ |
| Minimum Input for Max. Lamp Current | $V_{BRT\_ADJ}$ | $I_{O(LAMP)} = \text{Maximum Lamp Current}$  |                | 2.0  | 2.05     | V       |
| Maximum Input for Min. Lamp Current | $V_{BRT\_ADJ}$ | $I_{O(LAMP)} = \text{Minimum Lamp Current}$  | 0              |      |          | V       |
| <b>SLEEP BAR INPUT</b>              |                |  |                |      |          |         |
| RUN Mode                            | $V_{SLEEP}$    |  | 2.1            |      | $V_{IN}$ | V       |
| SLEEP Mode                          | $V_{SLEEP}$    |  | -0.3           |      | 0.8      | V       |
| <b>SET INPUT</b>                    |                |  |                |      |          |         |
| SET Low Threshold                   | $V_L$          |  |                |      | 0.4      | V       |
| Input Current                       | $I_{SET}$      | $V_{SET} \leq 0.4V$  |                | -500 |          | $\mu A$ |
| <b>POWER CHARACTERISTICS</b>        |                |  |                |      |          |         |
| Sleep Current                       | $I_{IN(MIN)}$  | $V_{IN} = 12V, \overline{SLEEP} \leq 0.8V$   | 0.0            | 12   | 50       | $\mu A$ |
| Run Current                         | $I_{IN(RUN)}$  | $V_{IN} = 12V, \overline{SLEEP} \geq 2.0V, I_{SET} = \text{Ground}$<br>$V_{LAMP} = 435V_{RMS}$ |                | 440  |          | mA      |
| Efficiency                          | $\eta$         | $V_{IN} = 12V, \overline{SLEEP} \geq 2.0V, I_{SET} = \text{Ground}$<br>$V_{LAMP} = 435V_{RMS}$ |                | 83   |          | %       |

**FUNCTIONAL PIN DESCRIPTION**

| CONN   | PIN                | DESCRIPTION  |
|--|--------------------|--|
| <b>CN1 (Molex 53261-0871 or equivalent) Mates with 51021-0800 housing, 50079-8100 pins. Mates with LX9501G input cable assembly.</b> |                    |  |
| CN1-1  | $V_{IN}$           | Main Input Power Supply ( $10.8V \leq V_{IN} \leq 13.2V$ )   |
| CN1-2  |                    |  |
| CN1-3  | GND                | Power Supply Return  |
| CN1-4  |                    |  |
| CN1-5  | $\overline{SLEEP}$ | ON/OFF Control. ( $0V < \overline{SLEEP} < 0.8V = \text{OFF}, \overline{SLEEP} \geq 2.1V = \text{ON}$ )                            |
| CN1-6  | BRITE              | Brightness Control (0V to 2.0V). 2.0V gives maximum lamp current.  |
| CN1-7  | SET                | SET Connecting this pin to ground decreases the output current (see Table 1)   |
| CN1-8  | FAULT              | High Impedance Output that indicates lamp status, high indicates fault (see figure 2 on page 5)                                    |
| <b>CN2 for LXMG1626-12-45 (JST SM03(4.0)B-BHS-1-TB(LF)(SN), Yeon Ho 20015WR-07A00 ) or equivalent)</b>                               |                    |  |
| CN2-1  | $V_{HI1}$          | High voltage connection to high side of lamp. Connect to lamp terminal with shortest lead length. <b>DO NOT</b> connect to ground. |
| CN2-2  | $V_{HI2}$          | High voltage connection to high side of lamp. Connect to lamp terminal with shortest lead length. <b>DO NOT</b> connect to ground. |
| CN2-3  | NC                 | No Connect   |
| CN2-4  | $V_{LO}$           | Connection to low side of lamp. Connect to lamp terminal with longer lead length. <b>DO NOT</b> connect to ground                  |



TABLE 1


OUTPUT CURRENT SETTINGS

| SET <sub>1</sub><br>(Pin 7) | Nominal Output Current |
|-----------------------------|------------------------|
| Open*                       | 12mA                   |
| Ground                      | 10mA                   |

\* If driven by a logic signal it should be open collector or open drain only, not a voltage source.

PHYSICAL DIMENSIONS


LXMG1626-12-45

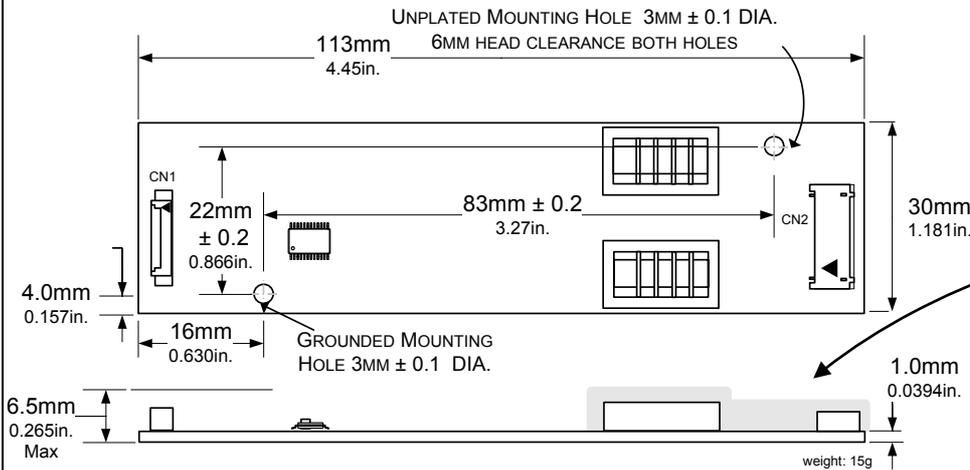

**Warning**  
High Voltage is present at high side of transformers, their cores and the high side of the output connector, when mounting please provide at least 2 mm clearance (in all directions) on the component side of the board to any conductor

Outside PCB tolerances ± 0.5mm , 4-40 recommended mounting screws  
All dimensions are in millimeters, inches are for reference only

SIMPLIFIED BLOCK DIAGRAM

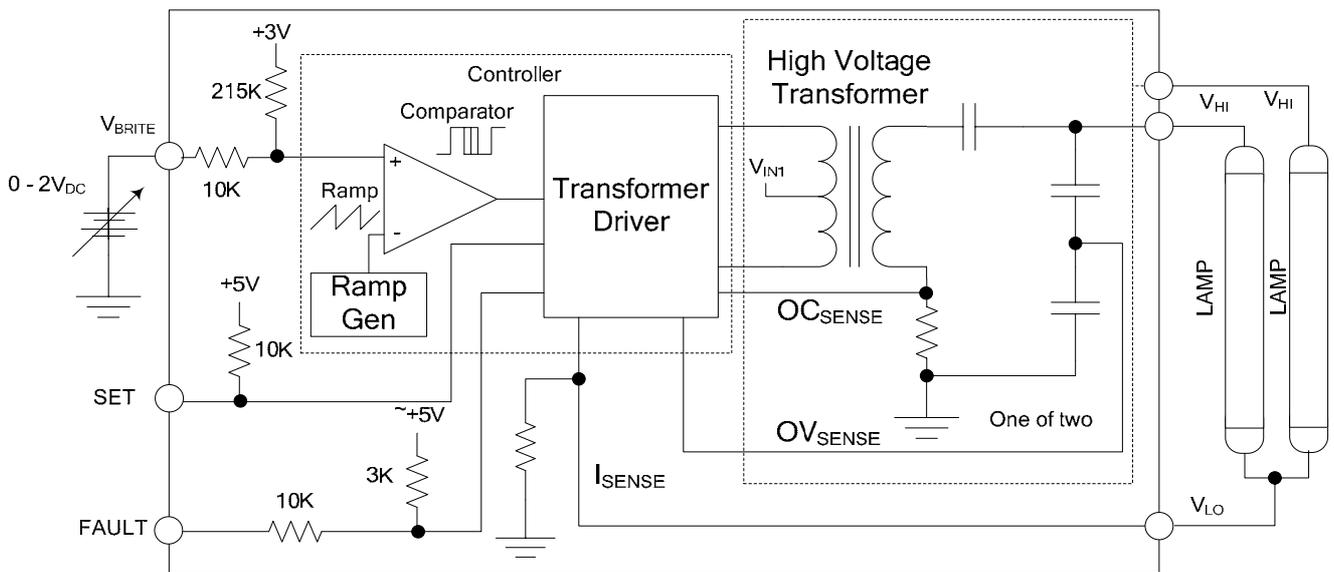





PanelMatch™ StayLit™ LXMG1626-12-45

12V Dual 6W CCFL Programmable Inverter Module

PRODUCTION DATASHEET

NOTES

PRODUCTION DATA – Information contained in this document is proprietary to Microsemi and is current as of publication date. This document may not be modified in any way without the express written consent of Microsemi. Product processing does not necessarily include testing of all parameters. Microsemi reserves the right to change the configuration and performance of the product and to discontinue product at any time.