

AIMH040 Series

40mm Hall Effect Current Sensor



Aim Dynamics' AIMH040 series utilizes the Hall Effect principle to measure DC current up to 1000A. They output a corresponding 0-5 Vdc or 4-20 mA signal, depending on the option chosen. The AIMH series is 1% accurate and can be ordered to anticipate unidirectional input.

SPECIFICATIONS

Rated Primary Current	500A, 800A, 1000A
Rated Output	+0-5Vdc or 4-20mA
Power Supply	+/-15 Vdc Required
Temperatures	Storage: -22°F to 221°F (-30° to 105°C) Operating: 14°F to 185°F (-10° to 85°C)
Offset	None
UL Max Voltage	600V on Bare Conductor
Operating Frequency	DC to 10 kHz (-3 dB)
Certifications	61010-1, EN 60044-1
Accuracy	+/-1% Class per IEC 61869-2
Weight	0.70 lbs (0.32 kg)



WIRING	
+	+15 Vdc
-	-15 Vdc
M	Signal
⊥	Common

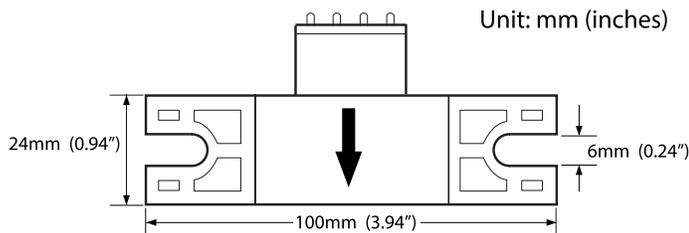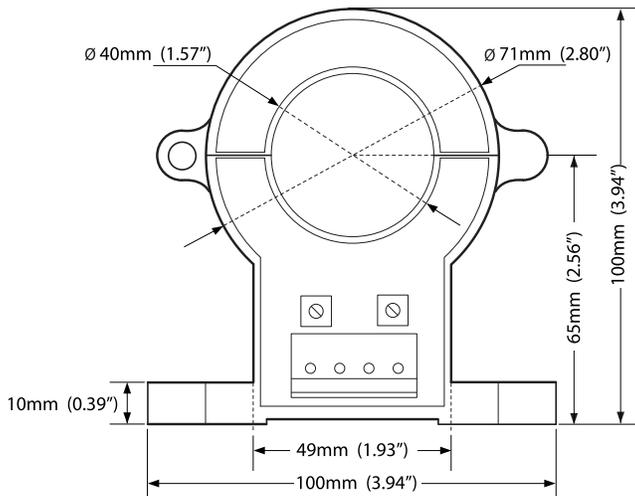

MODEL BUILDER

AIMH **a** - **b** **A** - **c**

Window Size a: 040 = 40mm	Amperage Rating b: 500 = 500A 800 = 800A 1000 = 1000A	Output c: 5V = 0-5V (Bidirectional) 420 = 4-20mA (Unidirectional) 420B = 4-20mA (Bidirectional)
--------------------------------------------	------------------------------------------------------------------------------	------------------------------------------------------------------------------------------------------------------------

SAFETY

- CE and RoHS Compliant

