


Intellimod™ Module
Three Phase + Brake
IGBT Inverter Output
75 Amperes/600 Volts

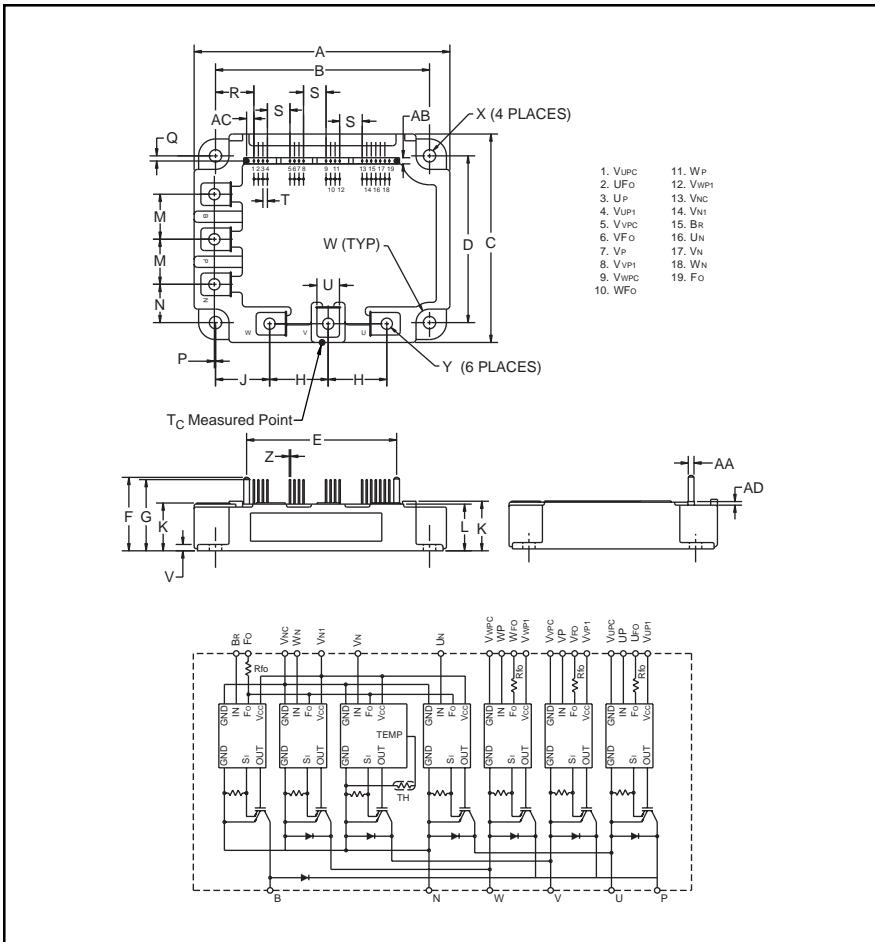

Description:

Powerex Intellimod™ Intelligent Power Modules are isolated base modules designed for power switching applications operating at frequencies to 20kHz. Built-in control circuits provide optimum gate drive and protection for the IGBT and free-wheel diode power devices.

Features:

- Complete Output Power Circuit
- Gate Drive Circuit
- Protection Logic
 - Short Circuit
 - Over Current
 - Over Temperature
 - Under Voltage
- Low Loss Using 4th Generation IGBT Chip

Applications:

- Inverters
- UPS
- Motion/Servo Control
- Power Supplies

Ordering Information:

Example: Select the complete part number from the table below
 -i.e. PM75RSD060 is a 600V, 75 Ampere Intellimod™ Intelligent Power Module.

Outline Drawing and Circuit Diagram

| Dimensions | Inches | Millimeters |
|------------|------------------|----------------|
| A | 4.33±0.04 | 110.0±1.0 |
| B | 3.74±0.02 | 95.0±0.5 |
| C | 3.50±0.04 | 89.0±1.0 |
| D | 2.91±0.02 | 74.0±0.5 |
| E | 2.62 | 66.44 |
| F | 1.28 | 32.6 |
| G | 1.24 | 31.6 |
| H | 1.02 | 26.0 |
| J | 0.94 | 24.0 |
| K | 0.87 +0.04/-0.02 | 22.0 +1.0/-0.5 |
| L | 0.84 | 21.2 |
| M | 0.79 | 20.0 |
| N | 0.69 | 17.5 |
| P | 0.02±0.01 | 0.5±0.3 |

| Dimensions | Inches | Millimeters |
|------------|------------|-------------|
| Q | 0.08±0.02 | 2.0±0.5 |
| R | 0.670 | 17.02 |
| S | 0.39 | 10.0 |
| T | 0.08 | 2.0 |
| U | 0.39 | 10.0 |
| V | 0.16 | 4.0 |
| W | 0.24 Rad. | Rad. 6.0 |
| X | 0.217 Dia. | M5.5 |
| Y | 0.197 | M5 |
| Z | 0.2 Sq. | Sq. 0.5 |
| AA | 0.10 | 2.54 |
| AB | 0.18 | 4.5 |
| AC | 0.13 | 3.22 |
| AD | 0.06 | 1.6 |

| Type | Current Rating Amperes | V _{CES} Volts (x 10) |
|------|---------------------------|----------------------------------|
| PM | 75 | 60 |



Powerex, Inc., 200 Hillis Street, Youngwood, Pennsylvania 15697-1800 (724) 925-7272

PM75RSD060

Intellimod™ Module

Three Phase + Brake IGBT Inverter Output

75 Amperes/600 Volts

Absolute Maximum Ratings, $T_j = 25^\circ\text{C}$ unless otherwise specified

| Characteristics | Symbol | PM75RSD060 | Units |
|--|------------------------|------------|------------------|
| Power Device Junction Temperature | T_j | -20 to 150 | $^\circ\text{C}$ |
| Storage Temperature | T_{stg} | -40 to 125 | $^\circ\text{C}$ |
| Case Operating Temperature | T_C | -20 to 100 | $^\circ\text{C}$ |
| Mounting Torque, M5 Mounting Screws | — | 31 | in-lb |
| Mounting Torque, M5 Main Terminal Screws | — | 31 | in-lb |
| Module Weight (Typical) | — | 560 | Grams |
| Supply Voltage Protected by OC and SC ($V_D = 13.5 - 16.5\text{V}$, Inverter Part) $T_j = 125^\circ\text{C}$ | $V_{\text{CC(prot.)}}$ | 400 | Volts |
| Isolation Voltage, AC 1 minute, 60Hz Sinusoidal | V_{ISO} | 2500 | Volts |

IGBT Inverter Sector

| | | | |
|--|------------------------|-----|---------|
| Collector-Emitter Voltage ($V_D = 15\text{V}$, $V_{\text{CIN}} = 15\text{V}$) | V_{CES} | 600 | Volts |
| Collector Current, \pm ($T_C = 25^\circ\text{C}$) | I_C | 75 | Amperes |
| Peak Collector Current, \pm ($T_C = 25^\circ\text{C}$) | I_{CP} | 150 | Amperes |
| Supply Voltage (Applied between P - N) | V_{CC} | 450 | Volts |
| Supply Voltage, Surge (Applied between P - N) | $V_{\text{CC(surge)}}$ | 500 | Volts |
| Collector Dissipation ($T_C = 25^\circ\text{C}$) | P_C | 255 | Watts |

IGBT Brake Sector

| | | | |
|--|--------------------|-----|---------|
| Collector-Emitter Voltage ($V_D = 15\text{V}$, $V_{\text{CIN}} = 15\text{V}$) | V_{CES} | 600 | Volts |
| Collector Current, \pm ($T_C = 25^\circ\text{C}$) | I_C | 30 | Amperes |
| Peak Collector Current, \pm ($T_C = 25^\circ\text{C}$) | I_{CP} | 60 | Amperes |
| FWDi Rated DC Reverse Voltage ($T_C = 25^\circ\text{C}$) | $V_{\text{R(DC)}}$ | 600 | Volts |
| FWDi Forward Current ($T_C = 25^\circ\text{C}$) | I_F | 30 | Amperes |
| Collector Dissipation ($T_C = 25^\circ\text{C}$) | P_C | 176 | Watts |

Control Sector

| | | | |
|---|------------------|----|-------|
| Supply Voltage Applied between ($V_{\text{UP1}}-V_{\text{UPC}}$, $V_{\text{VP1}}-V_{\text{VPC}}$, $V_{\text{WP1}}-V_{\text{WPC}}$, $V_{\text{N1}}-V_{\text{NC}}$) | V_D | 20 | Volts |
| Input Voltage Applied between ($\text{Up}-V_{\text{UPC}}$, $\text{Vp}-V_{\text{VPC}}$, $\text{Wp}-V_{\text{WPC}}$, $\text{UN}-V_{\text{N}}-\text{WN}-\text{Br}-V_{\text{NC}}$) | V_{CIN} | 20 | Volts |
| Fault Output Supply Voltage (Applied between F_O and V_C) | V_{FO} | 20 | Volts |
| Fault Output Current (U_{FO} , V_{FO} , W_{FO} , F_O) | I_{FO} | 20 | mA |



Powerex, Inc., 200 Hillis Street, Youngwood, Pennsylvania 15697-1800 (724) 925-7272

PM75RSD060

Intellimod™ Module

Three Phase + Brake IGBT Inverter Output

75 Amperes/600 Volts

Electrical and Mechanical Characteristics, $T_j = 25^\circ\text{C}$ unless otherwise specified

| Characteristics | Symbol | Test Conditions | Min. | Typ. | Max. | Units |
|--------------------------------------|----------------------|---|------|------|------|---------------|
| IGBT Inverter Sector | | | | | | |
| Collector Cutoff Current | I_{CES} | $V_{CE} = V_{CES}, T_j = 25^\circ\text{C},$ $V_D = 15\text{V}$ | — | — | 1.0 | mA |
| | | $V_{CE} = V_{CES}, T_j = 125^\circ\text{C},$ $V_D = 15\text{V}$ | — | — | 10 | mA |
| Diode Forward Voltage | V_{EC} | $-I_C = 75\text{A}, V_D = 15\text{V}, V_{CIN} = 15\text{V}$ | — | 2.2 | 3.3 | Volts |
| Collector-Emitter Saturation Voltage | $V_{CE(\text{sat})}$ | $V_D = 15\text{V}, V_{CIN} = 0\text{V}, I_C = 75\text{A},$ $T_j = 25^\circ\text{C}$ | — | 1.7 | 2.3 | Volts |
| | | $V_D = 15\text{V}, V_{CIN} = 0\text{V}, I_C = 75\text{A},$ $T_j = 125^\circ\text{C}$ | — | 1.7 | 2.3 | Volts |
| Inductive Load Switching Times | t_{on} | | 0.8 | 1.2 | 2.4 | μs |
| | t_{rr} | $V_D = 15\text{V}, V_{CIN} = 0 \sim 15\text{V}$ | — | 0.15 | 0.3 | μs |
| | $t_{C(on)}$ | $V_{CC} = 300\text{V}, I_C = 75\text{A}$ | — | 0.4 | 1.0 | μs |
| | t_{off} | $T_j = 125^\circ\text{C}$ | — | 2.4 | 3.3 | μs |
| | $t_{C(off)}$ | | — | 0.6 | 1.2 | μs |
| IGBT Brake Sector | | | | | | |
| Collector Cutoff Current | I_{CES} | $V_{CE} = V_{CES}, T_j = 25^\circ\text{C},$ $V_D = 15\text{V}$ | — | — | 1.0 | mA |
| | | $V_{CE} = V_{CES}, T_j = 125^\circ\text{C},$ $V_D = 15\text{V}$ | — | — | 10 | mA |
| FWDi Forward Voltage | V_{FM} | $-I_F = 30\text{A}$ | — | 2.5 | 3.5 | Volts |
| Collector-Emitter Saturation Voltage | $V_{CE(\text{sat})}$ | $V_D = 15\text{V}, V_{CIN} = 0\text{V}, I_C = 30\text{A},$ $T_j = 25^\circ\text{C}$ | — | 1.8 | 2.5 | Volts |
| | | $V_D = 15\text{V}, V_{CIN} = 0\text{V}, I_C = 30\text{A},$ $T_j = 125^\circ\text{C}$ | — | 1.9 | 2.6 | Volts |



Powerex, Inc., 200 Hillis Street, Youngwood, Pennsylvania 15697-1800 (724) 925-7272

PM75RSD060

Intellimod™ Module

Three Phase + Brake IGBT Inverter Output

75 Amperes/600 Volts

Electrical and Mechanical Characteristics, $T_j = 25^\circ\text{C}$ unless otherwise specified

| Characteristics | Symbol | Test Conditions | Min. | Typ. | Max. | Units |
|--|----------------------------|--|-----------------|---------------|-----------------|------------------|
| Control Sector | | | | | | |
| Over Current Trip Level Inverter Part ($V_D = 15\text{V}$) | OC | $T_j = -20^\circ\text{C}$ $T_j = 25^\circ\text{C}$ $T_j = 125^\circ\text{C}$ | — 192 115 | — 226 — | 380 320 — | Amperes |
| Over Current Trip Level Brake Part | OC | $-20^\circ\text{C} \leq T_j \leq 125^\circ\text{C}$, $V_D = 15\text{V}$ | 39 | 53 | — | Amperes |
| Short Circuit Trip Level Inverter Part | SC | $-20^\circ\text{C} \leq T_j \leq 125^\circ\text{C}$, $V_D = 15\text{V}$ | — | 241 | — | Amperes |
| Short Circuit Trip Level Brake Part | | | — | 79 | — | Amperes |
| Over Current Delay Time | $t_{off(OC)}$ | $V_D = 15\text{V}$ | — | 10 | — | μs |
| Over Temperature Protection ($V_D = 15\text{V}$) (Lower Arm) | OT O_{TR} | Trip Level Reset Level | 111 — | 118 100 | 125 — | $^\circ\text{C}$ |
| Supply Circuit Under Voltage Protection ($-20 \leq T_j \leq 125^\circ\text{C}$) | UV UV_R | Trip Level Reset Level | 11.5 — | 12.0 12.5 | 12.5 — | Volts |
| Circuit Current | I_D | $V_D = 15\text{V}$, $V_{CIN} = 15\text{V}$, $V_{N1}-V_{NC}$ $V_D = 15\text{V}$, $V_{CIN} = 15\text{V}$, $V_{XP1}-V_{XPC}$ | — — | 44 13 | 60 18 | mA |
| Input ON Threshold Voltage | $V_{CIN(on)}$ | Applied between U_p-V_{UPC} , V_p-V_{VPC} , | 1.2 | 1.5 | 1.8 | Volts |
| Input OFF Threshold Voltage | $V_{CIN(off)}$ | W_p-V_{WPC} , U_N , V_N , W_N , B_r-V_{NC} | 1.7 | 2.0 | 2.3 | Volts |
| Fault Output Current* | $I_{FO(H)}$ $I_{FO(L)}$ | $V_D = 15\text{V}$, $V_{CIN} = 15\text{V}$ $V_D = 15\text{V}$, $V_{CIN} = 15\text{V}$ | — — | — 10 | 0.01 15 | mA |
| Minimum Fault Output Pulse Width* | t_{FO} | $V_D = 15\text{V}$ | 1.0 | 1.8 | — | mS |

*Fault output is given only when the internal OC, SC, OT and UV protections schemes of either upper or lower devide operate to protect it.



Powerex, Inc., 200 Hillis Street, Youngwood, Pennsylvania 15697-1800 (724) 925-7272

PM75RSD060
Intellimod™ Module
Three Phase + Brake IGBT Inverter Output
75 Amperes/600 Volts

Thermal Characteristics

| Characteristic | Symbol | Condition | Min. | Typ. | Max. | Units |
|-------------------------------------|-----------------|---|------|------|--------|---------|
| Junction to Case Thermal Resistance | $R_{th(j-c)Q}$ | Each IGBT | — | — | 0.49 | °C/Watt |
| Inverter Part | $R_{th(j-c)F}$ | Each FWDi | — | — | 1.38 | °C/Watt |
| | $R_{th(j-c')Q}$ | Each IGBT* | — | — | 0.30** | °C/Watt |
| | $R_{th(j-c')F}$ | Each FWDi* | — | — | 0.47** | °C/Watt |
| | $R_{th(j-c)Q}$ | Each IGBT | — | — | 0.71 | °C/Watt |
| Brake Part | $R_{th(j-c)F}$ | Each FWDi | — | — | 1.66 | °C/Watt |
| | $R_{th(j-c')Q}$ | Each IGBT* | — | — | 0.45** | °C/Watt |
| | $R_{th(j-c')F}$ | Each FWDi* | — | — | 0.96** | °C/Watt |
| Contact Thermal Resistance | $R_{th(c-f)}$ | Case to Fin Per Module, Thermal Grease Applied | — | — | 0.027 | °C/Watt |

* T_C measured point is just under chip.

**If you use this value, $R_{th(f-a)}$ should be measured just under the chips.

Recommended Conditions for Use

| Characteristic | Symbol | Condition | Value | Units |
|---------------------------|----------------|--|-------------|-------|
| Supply Voltage | V_{CC} | Applied across P-N Terminals | 0 ~ 400 | Volts |
| Control Supply Voltage*** | V_D | Applied between $V_{UP1}-V_{UPC}$, $V_{N1}-V_{NC}$, $V_{VP1}-V_{VPC}$, $V_{WP1}-V_{WPC}$ | 15 ± 1.5 | Volts |
| Input ON Voltage | $V_{CIN(on)}$ | Applied between U_P-V_{UPC} , V_P-V_{VPC} , | 0 ~ 0.8 | Volts |
| Input OFF Voltage | $V_{CIN(off)}$ | W_P-V_{WPC} , U_N , V_N , W_N , B_r-V_{NC} | 4.0 ~ V_D | Volts |
| PWM Input Frequency | f_{PWM} | Using Application Circuit | 0 ~ 20 | kHz |
| Minimum Dead Time | t_{DEAD} | Input Signal | ≥ 2.5 | μS |

*** With ripple satisfying the following conditions: dv/dt swing ≤ ±5V/μs, Variation ≤ 2V peak to peak.

PM75RSD060

Intellimod™ Module

Three Phase + Brake IGBT Inverter Output

75 Amperes/600 Volts

