


■ Features

- Power Rating: 200W
- Input Voltage: 120-277Vac
- Constant current and constant voltage hybrid output
- Output current (570mA-8330mA)
- Output current programmable with Near Field Communication controller
- Efficiency to 94%
- Compatible with 0-10V, PWM, Timer, Dim-to-off option, 12V/200mA AUX
- UL, Type HL, Type TL
- Lightning, OVP, SCP, OTP, & Over Current Protection
- IP67
- 5-year warranty
- Surge Protection: Diff: 6kV, Common: 10kV



*Near Field Communication controller

RoHS
Compliant

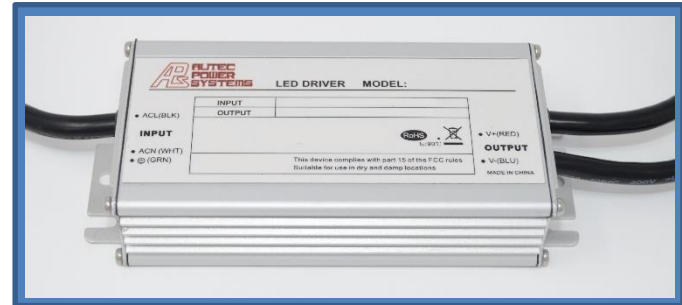

*Product images are for illustrative purposes only and may vary from actual design.

■ Application

- Indoor and outdoor applications

■ Model List*(See part number scheme for model number details)

Model Number	Input Voltage Range	Output Power	Output Voltage	Output Current Min.	Output Current Max.	Efficiency 110V/220V	Certification
L2WCP200S833ST-XYZ	120-277Vac	200W	24-36V	3330mA	8330mA	90%/92%	UL/cUL
L2WCP200S556ST-XYZ	120-277Vac	200W	36-48V	2220mA	5560mA	90%/92%	UL/cUL
L2WCP200S417ST-XYZ	120-277Vac	200W	48-80V	1670mA	4170mA	91%/93%	UL/cUL
L2WCP200S250ST-XYZ	120-277Vac	200W	80-140V	1000mA	2500mA	92%/94%	UL/cUL
L2WCP200S143ST-XYZ	120-277Vac	200W	140-233V	570mA	1430mA	91%/93%	UL/cUL

(Add-J for J-Box, Ex.) L2WCP200SXXXST-J-XYZ; Contact Autec Sales for all options.)

Ordering options	
XY= Programmable	Z=Dimming
FC=Near Field Communication	D=DALI Dimming
	B=BLE Dimming

■ Technical Data

Input voltage range	120-277Vac
Frequency	47-63Hz
Power factor	> 0.99 @115Vac & 80~100% Full load, > 0.97 @230Vac & 80~100% Full load
Output voltage	24-233V
Output power	200W
Ripple and Noise	3.0%Vo

Technical Sales / Customer Service: +1-818-338-7788 • Email: sales@autec.com

31328 Via Colinas Suite 102 • Westlake Village, CA 91362 USA • www.autec.com

September 23, 2019

■ Technical Data(cont.)

Max input current	2A @115Vac, 0.799A@230Vac
Max input Power	200W
Efficiency	90-94%
Line Regulation	±0.3%
Load Regulation	±1%
Inrush Current	65A @230Vac cold start +25°C
Dimming	0~10V/ PWM/ Timer, Dim-to-off option
THD	< 20%
Current Programmable	Yes
Output Current Programmable Range	570-8330mA
Over Current Protection	Protection type: Constant current limiting, recovers automatically after fault condition is removed
Short Current Protection	Hiccup mode, recovers automatically after fault condition is removed
Over Voltage Protection	1.3Vo, Protection type: Hiccup mode, recovers automatically after fault condition is removed
Over Temp. Protection	Hiccup mode, recovers automatically after fault condition is removed
Operating Temperature	-35~+70°C
Max T-case Temp.	83°C
Operating Humidity	10 ~ 100% RH non-condensing
Storage Temp., Humidity	-40 ~+85°C, 5 ~ 100% RH
Temp. Coefficient	±0.05%/°C (0~50°C)
Vibration	10~500Hz, 5G 12min./1cycle, period for 72min. each along X, Y, Z axes
Dimensions	196x70x37mm 7.7x2.75x1.26 in
Packing	25pcs/carton
Weight	832.6g

■ Safety Compliance

Safety Standards	UL8750, UL935, UL1012, CSA-C22.2 No.107.1, EN61347-1, EN61347-2-13
Withstand Voltage	I/P – O/P: 3.75kVAC
Isolation Resistance	I/P – O/P: 100M Ohms / 500VDC /25°C / 70% RH
EMC Emission	Compliance to EN55015, EN61000-3-2 Class C (≥60% load); EN61000-3-3
EMC Immunity	Compliance to EN61000-4-2,3,4,5,6,8,11; EN61547, EN55024

Disclaimer:

Autec Power Systems' (Autec) LED Drivers are Hi-Pot tested during the manufacturing process. Autec assumes no responsibility for secondary Hi-Pot testing at customer location or designated production line(s). Should customer require further Hi-Pot testing, at their own production line, following assembly of the LED Driver into the customer's assembled fixture, Autec requests advance notice. This request must be communicated to Autec in a timely manner and is recommended to be requested at time of issuing each purchase order.


Technical Sales / Customer Service: +1-818-338-7788 • Email: sales@autec.com

31328 Via Colinas Suite 102 • Westlake Village, CA 91362 USA • www.autec.com


September 23, 2019

2 / 8


■ Derating curve

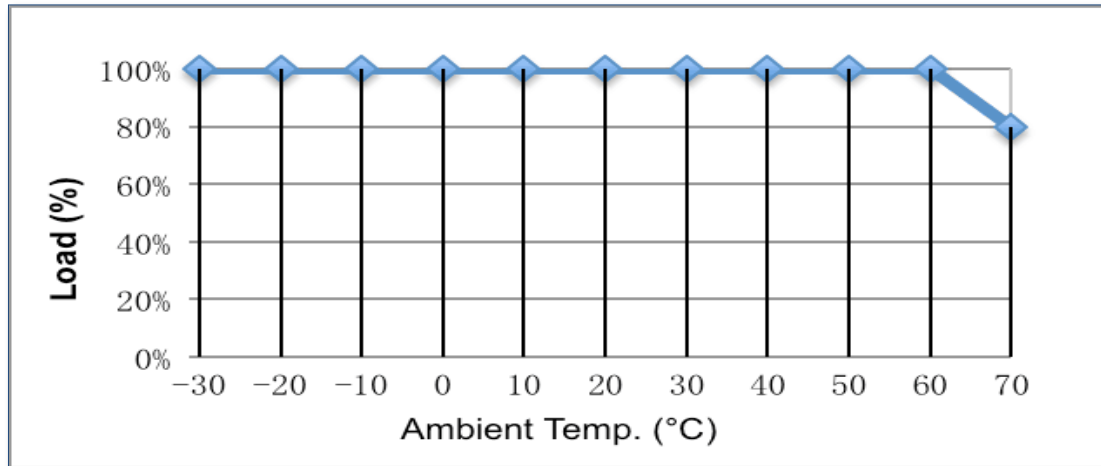

■ Static Characteristics

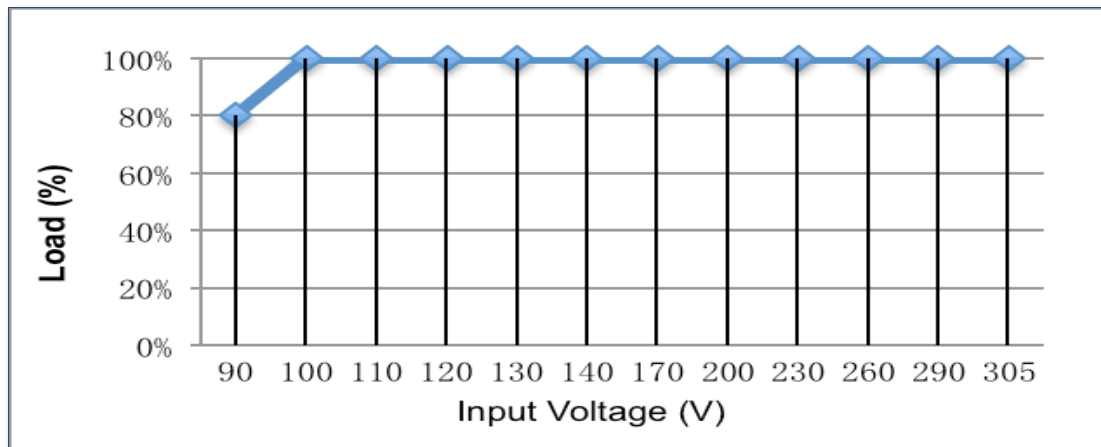

■ Power Factor vs. Output

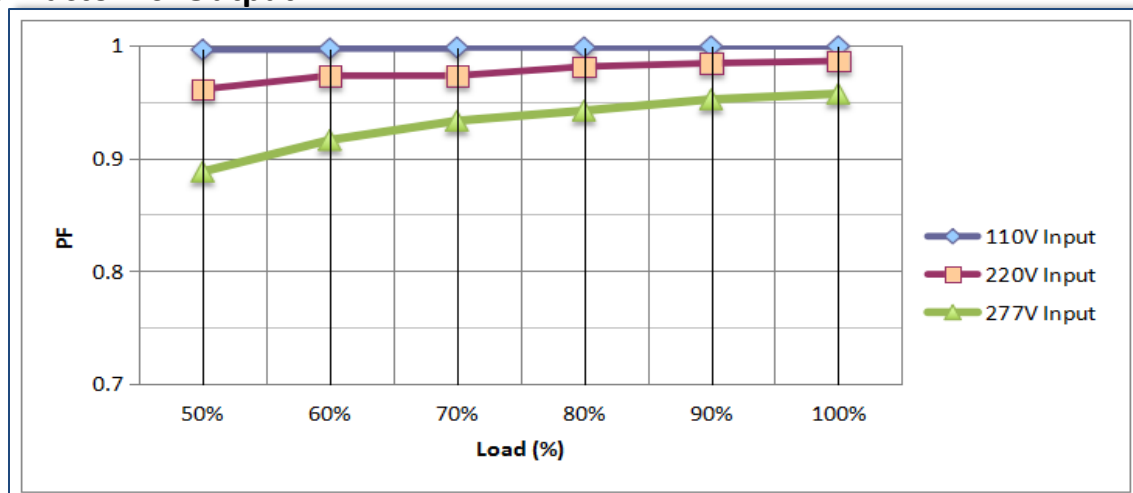


Technical Sales / Customer Service: +1-818-338-7788 • Email: sales@autec.com

31328 Via Colinas Suite 102 • Westlake Village, CA 91362 USA • www.autec.com


September 23, 2019

3 / 8


THD vs. Output

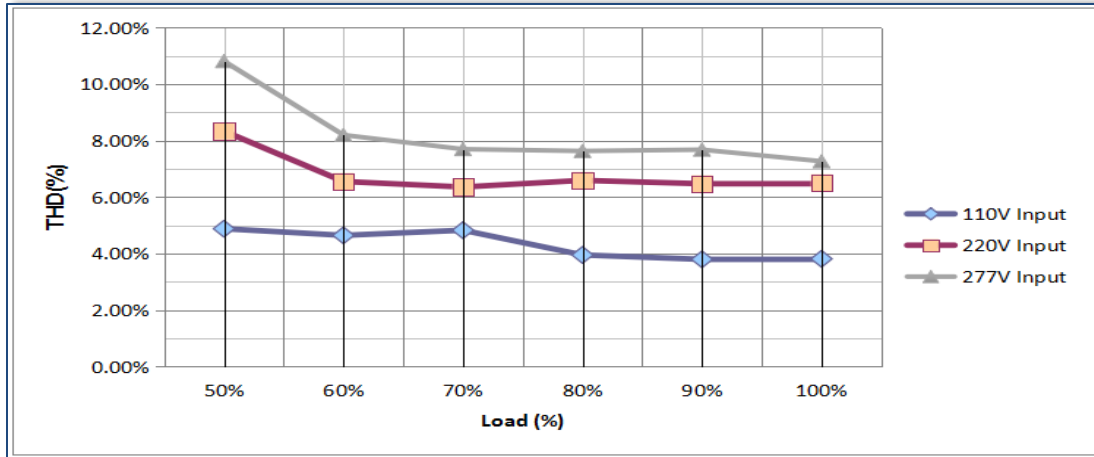

Efficiency vs Output

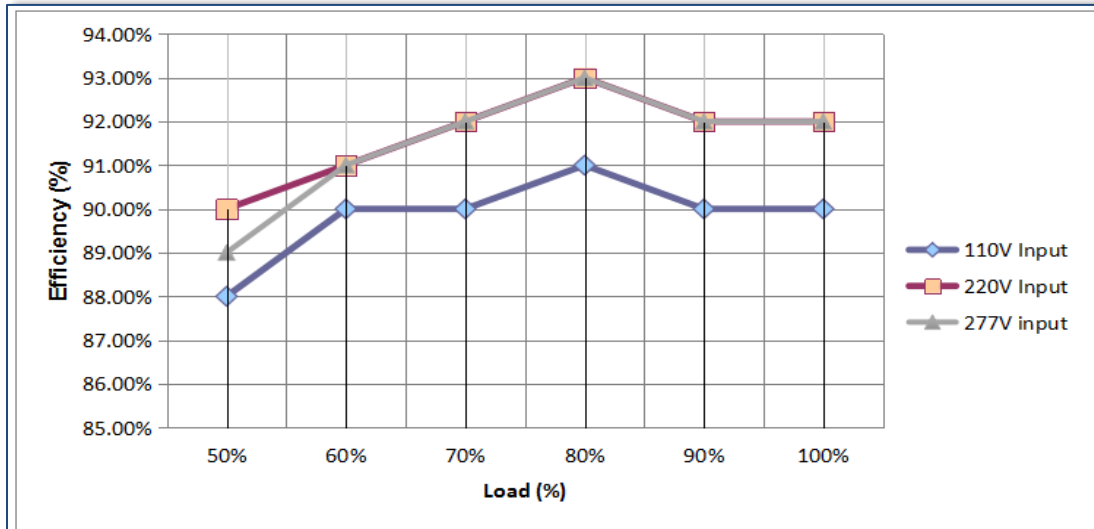

Lifetime vs Case Temp.

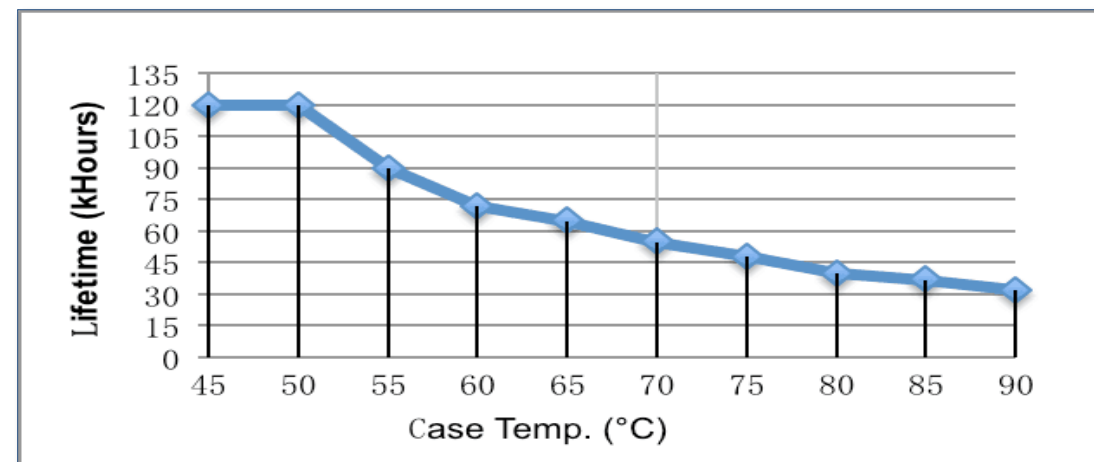

Technical Sales / Customer Service: +1-818-338-7788 • Email: sales@autec.com

31328 Via Colinas Suite 102 • Westlake Village, CA 91362 USA • www.autec.com

September 23, 2019

4 / 8

■ Near Field Communication Controller





NOTE:

1. The Near Field Communication controller can program the output current, voltage and timer delays.
2. The Near Field Communication programming is a non-contact process, therefore much safer compared to traditional programming methods.
3. Power devices can be programmed without AC power applied to the driver.

■ Dimming

0-10V Analog Dimming & PWM Dimming

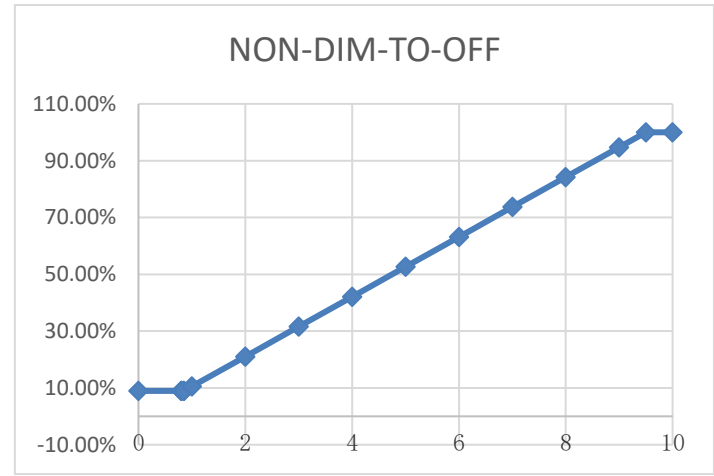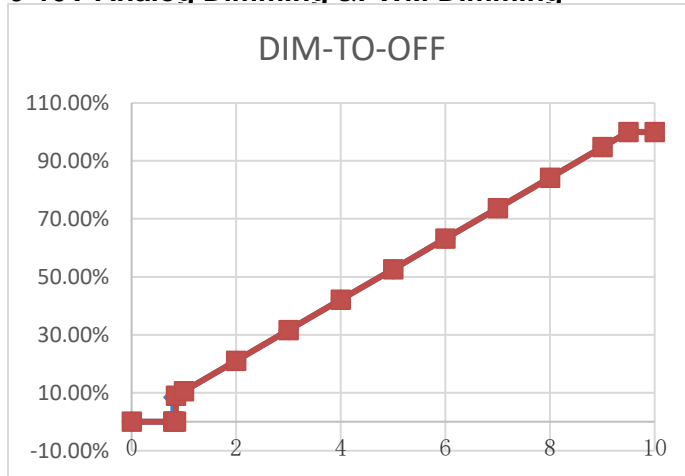

GND	Grey
Dimming wire 0-10V&PWM	Purple
12V AUX	Yellow
Input Dimming Voltage	0-10V
DIM+ Source Current	0-1mA
12V AUX Source Current	200mA
PWM Frequency Range	0.5-3KHZ
PWM high level	10V

NOTE:

1. I_o is actual output current and I_r is rated current without dimming control.
2. For the driver to operate properly, the load voltage must be in the working voltage range.
3. We have DIM-TO-OFF option, which can be programmed by the programmer.
4. Maximum input voltage for the dimming wire is 12V.
5. AUX wire is only for source, can't connect to other voltage source.


Technical Sales / Customer Service: +1-818-338-7788 • Email: sales@autec.com

31328 Via Colinas Suite 102 • Westlake Village, CA 91362 USA • www.autec.com

September 23, 2019

5 / 8


PWM Dimming

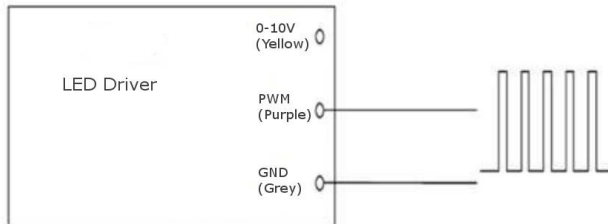


TIMER Dimming

NOTE:

1. The dimming time can be programmed by the programmer.
2. The time of t_1 and t_2 can be set by the programmer.(0.5h step)
3. The value of I_1 and I_2 can be set by the programmer.
4. Changing the current from I_1 to I_2 may take a few min.

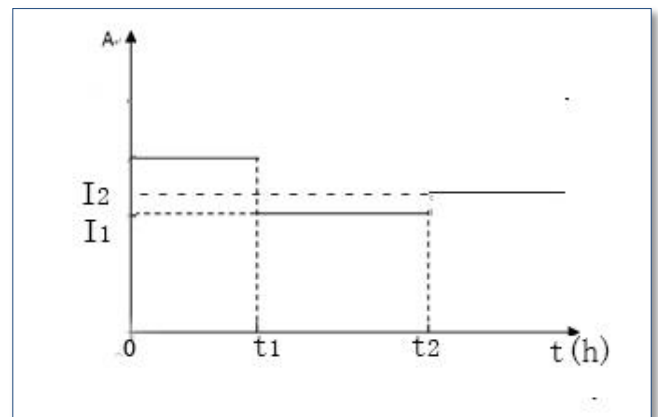

■ Mechanical Design

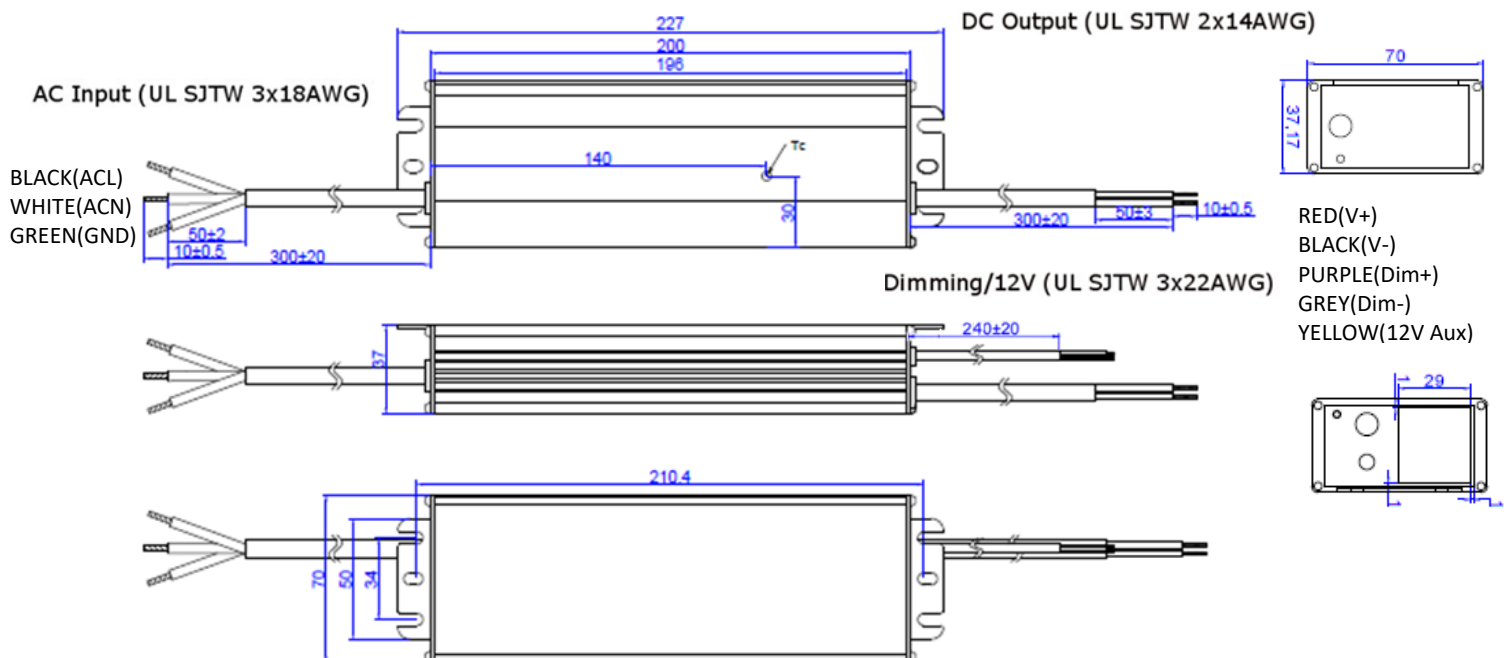


Technical Sales / Customer Service: +1-818-338-7788 • Email: sales@autec.com

31328 Via Colinas Suite 102 • Westlake Village, CA 91362 USA • www.autec.com

September 23, 2019

6 / 8

■ **Mechanical Design J-Box**

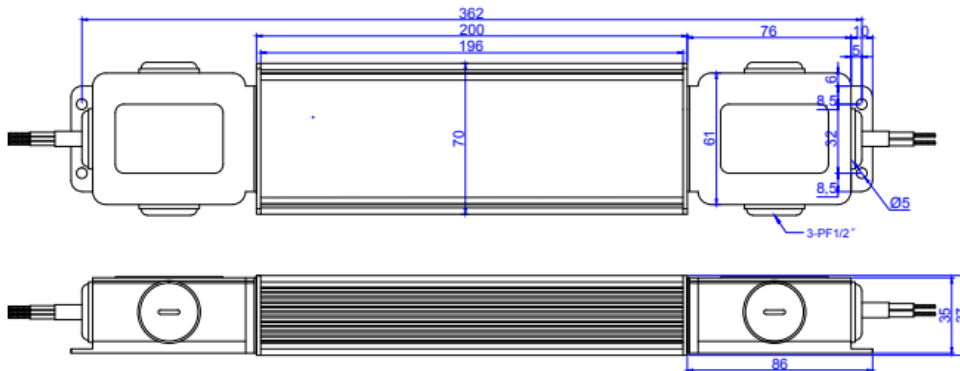

UL PENDING

Part Number Scheme

L2 W C P 200 S XXX S T -XYZ

L2=LED Driver Series

W=Input Voltage 120-277Vac

C=Constant Power

P=Programmable

200=Output Power(Watts)

-XYZ=Programming and dimming options. *See ordering options table on page 1.

T=Class I, 3 Wire Input

S=Metal case

XXX=Rated Current
Ex.) 143=1430mA
833=8330mA


S=Single Output

Technical Sales / Customer Service: +1-818-338-7788 • Email: sales@autec.com

31328 Via Colinas Suite 102 • Westlake Village, CA 91362 USA • www.autec.com

September 23, 2019

7 / 8

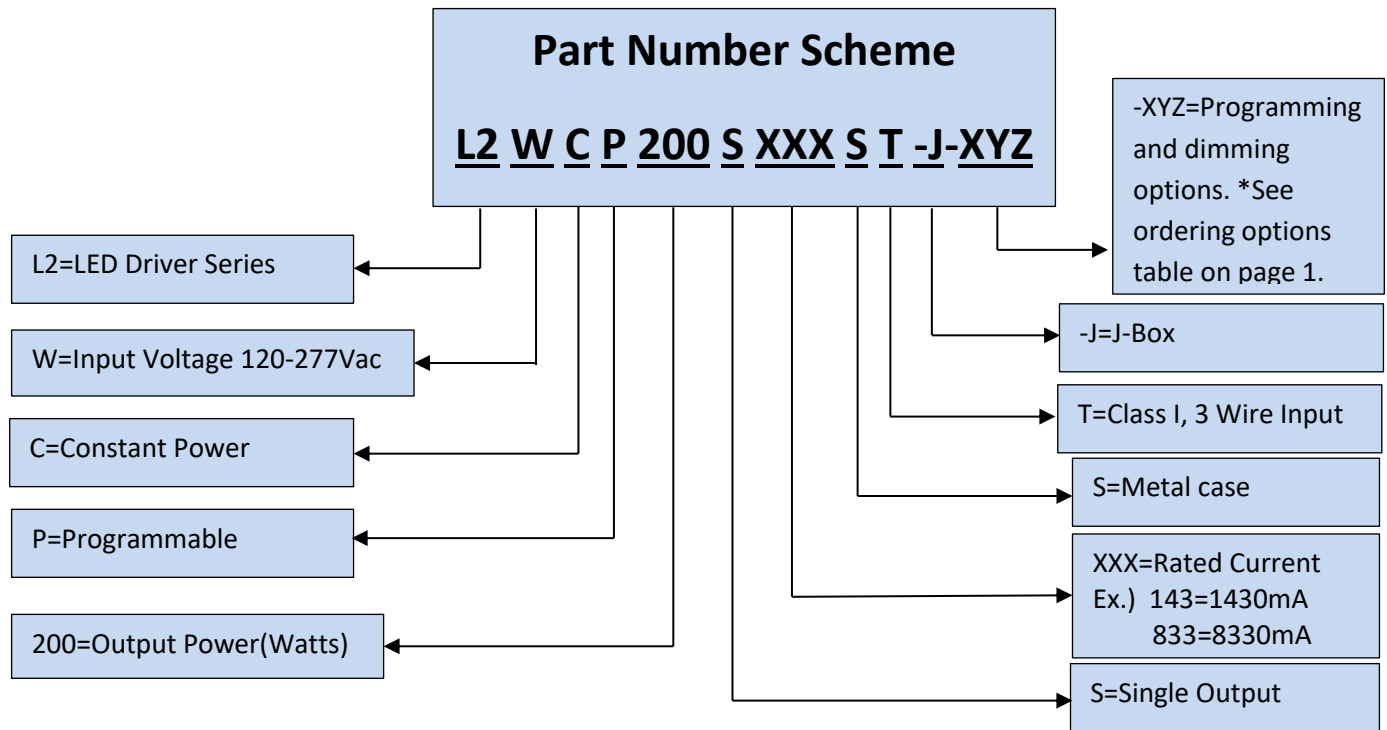

***Product images are for illustrative purposes only and may vary from actual design.**

***Specifications are subject to change without notice. Autec is not responsible for issues arising from errors or omissions.**

Technical Sales / Customer Service: +1-818-338-7788 • Email: sales@autec.com

31328 Via Colinas Suite 102 • Westlake Village, CA 91362 USA • www.autec.com

September 23, 2019

8 / 8