

Panasonic

ideas for life

NEW

Control Category 4 PLe SIL3

SAFETY LIQUID LEAK SENSOR

SQ4 SERIES



Conforming to SEMI-S2



Industry first* Improved productivity
Two-stage detection

Industry first* Compliance with international safety standards
Safety certification

*As of October 2010; according to research by Panasonic Electric Works SUNX.

A Safety Liquid Leak Sensor Offering Unparalleled Productivity and Safety

Introducing the SQ4 Series

Featuring a two-stage detection system for improved productivity and reliable safety performance that complies with international standards



Improved productivity
Two-stage detection

- ✓ Simplify preventive maintenance and maintenance planning
- ✓ Improve yields
- ✓ Reduce damage to work in progress in case of a leak
- ✓ Trigger an emergency stop in the event of a malfunction

*As of October 2010; according to research by Panasonic Electric Works SUNX.



Lights up when conditions are normal (and at incipient liquid leak detection)


● **Monitoring**

Lights up at incipient liquid leak detection (and at abnormal leak detection)

● **First stage: Initial detection (non-safety output)**

Use as a warning

Report the occurrence of an incipient liquid leak to the production supervisor and perform equipment maintenance after removing any work in progress.

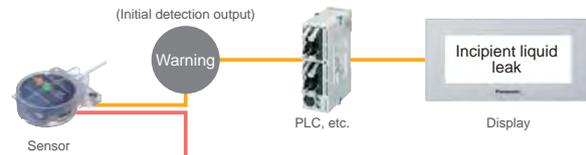


Ensure productivity

By quickly detecting even small liquid leaks (incipient leaks), personnel can perform preventive maintenance or plan maintenance, thereby reducing both downtime and damage to work in progress.

Lights up at abnormal liquid leak detection

● **Second stage: Liquid leak detection (safety-critical output)**

Emergency stop

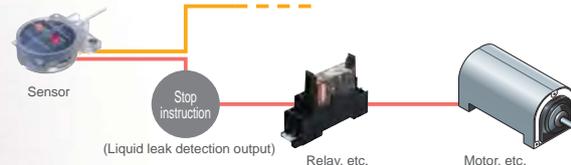


Ensure safety

In the event of a high-volume liquid leak (an abnormal liquid leak), the target equipment is stopped immediately to ensure safety.

● The **SQ4** can also be used alone.




The **SQ4** can also be used without a controller, allowing the benefits of two-stage detection to be added to existing equipment by augmenting or replacing existing detection systems.

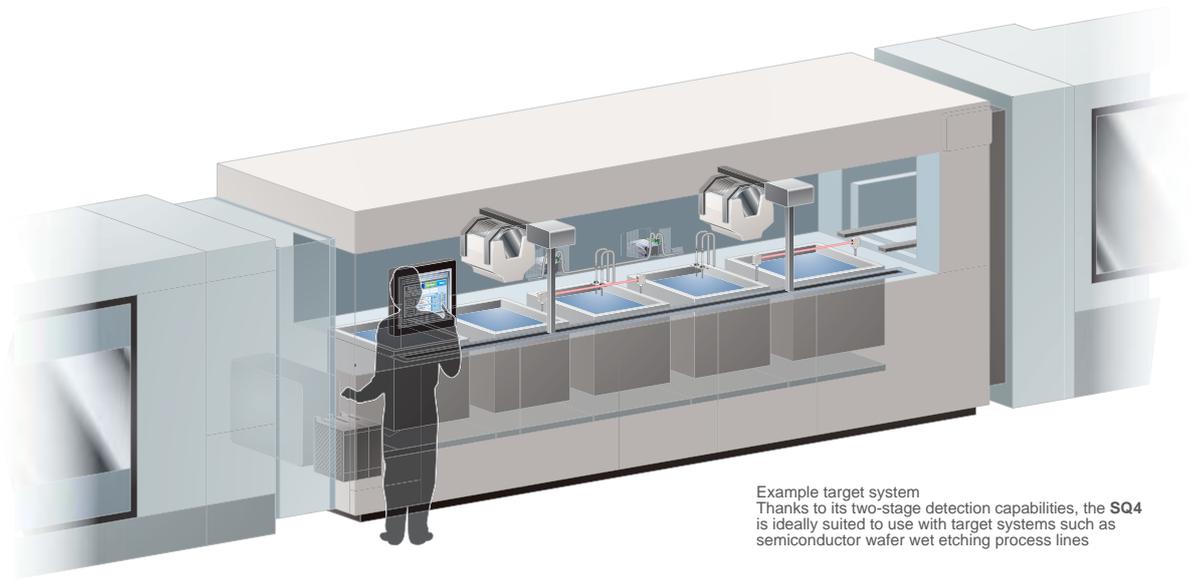

Example target system
Thanks to its two-stage detection capabilities, the **SQ4** is ideally suited to use with target systems such as semiconductor wafer wet etching process lines

- Two-stage detection addresses both incipient liquid leaks (by generating a warning) and abnormal liquid leaks (by initiating an emergency stop).

On the bottom of the sensor are two detection units, one located at the front and one at the center. If a liquid leak occurs in front of the sensor, the front detection unit will detect even a small incipient leak. When the leak increases in volume and reaches the center of the sensor, it will be detected as an abnormal leak. While previous implementations of two-stage liquid leak detection have relied on two separate sensors installed at different heights, the **SQ4** delivers the same full-featured detection capability in a single sensor unit.

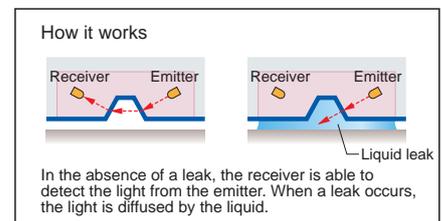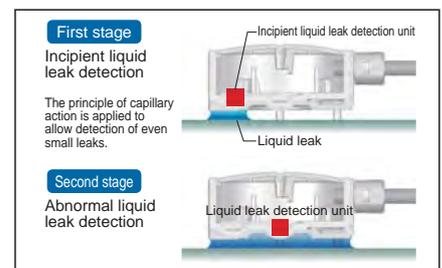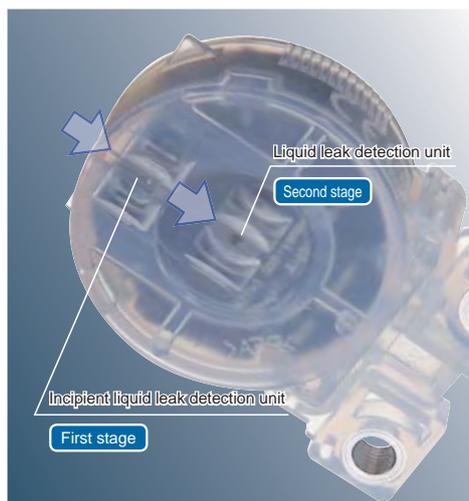

- The **SQ4** can also detect human error (improper installation).

In addition to detecting liquid leaks, the **SQ4** can detect both human error (such as a failure to install the sensor) and sensor malfunctions. If the sensor itself or the sensor and its mounting bracket have become dislodged, have been improperly installed, or are suffering from a broken cable connection, light from the emitter will not reach the receiver, causing the device to generate the same output as if a liquid leak had occurred.




Knurling on the sides of the sensor head makes it easy to grip.

When conditions are normal
Sensor light from the emitter is able to reach the receiver.



When the sensor has been installed improperly

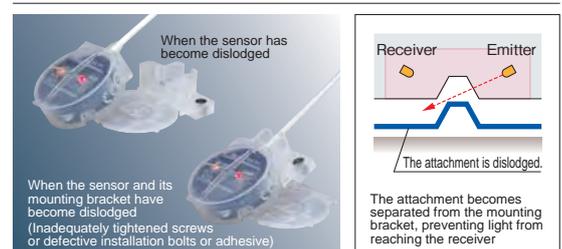





Reliable stop instructions Safety certification

- ✓ Safety-certified by third-party certification organizations TUV, KOSHA
- ✓ International standards ISO 13849-1, IEC 61508-1 to 7, ANSI/UL 508, etc.
- ✓ South Korean regulations S1-G-1-2009, S2-W-5-2009
- ✓ SEMI standards SEMI-S2-0310a


- The **SQ4** is the first device of its kind in the industry* to earn safety certification, demonstrating that it delivers safety performance of the highest caliber.

*As of October 2010; according to research by Panasonic Electric Works SUNX.

The **SQ4** system is designed to fulfill safety requirements imposed by international standards. When used in combination, the **SQ4-A** sensor and **SQ4-C11** controller meet category 4 / PLe / SIL3 requirements under ISO 13849-1:2008, which has been updated to add probability criteria to the existing risk evaluation system (in the control category), allowing the functional safety of programmable electronic control systems and related devices to be evaluated. The sensor fulfills category 1 / PLc / SIL1 requirements when used in a standalone configuration.

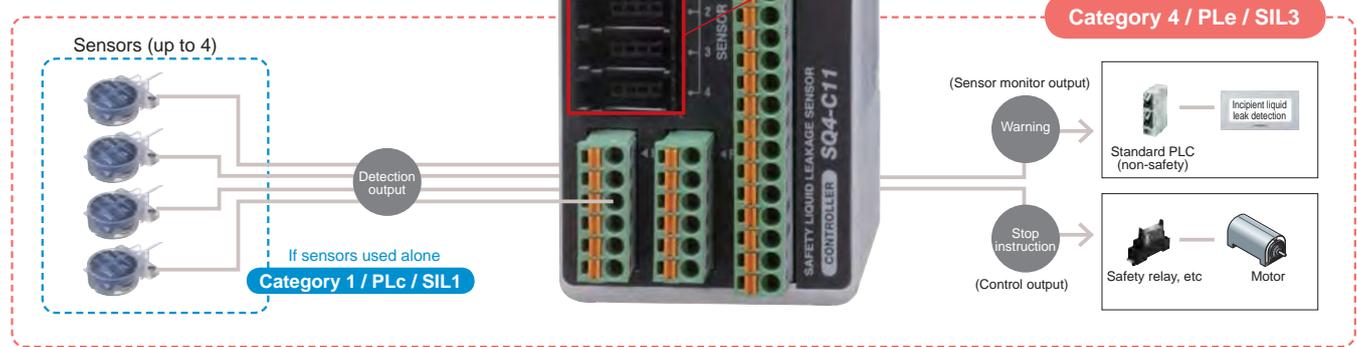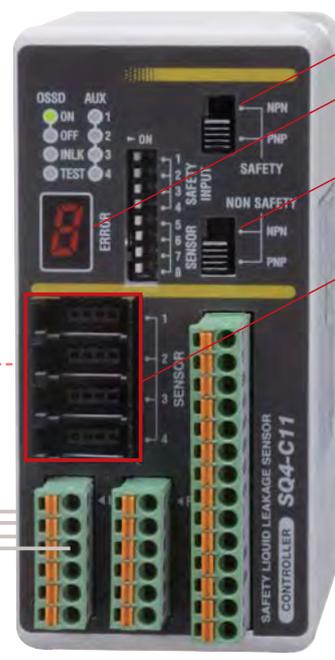

- Dual CPUs deliver an advanced level of safety control.

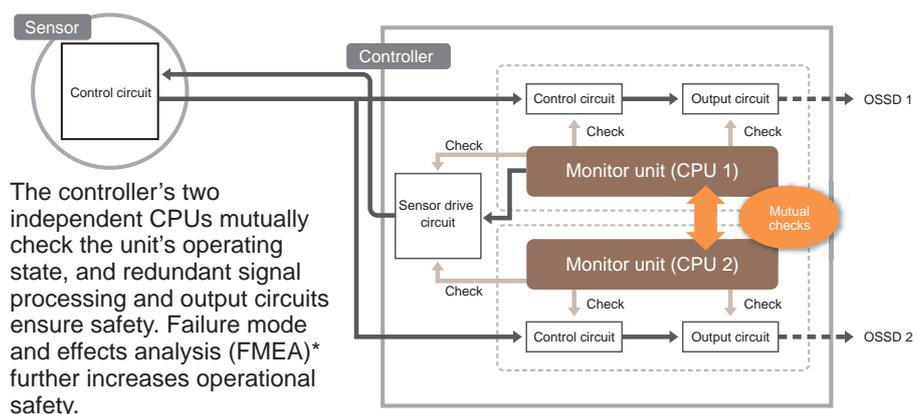

The controller's two independent CPUs mutually check the unit's operating state, and redundant signal processing and output circuits ensure safety. Failure mode and effects analysis (FMEA)* further increases operational safety.

*FMEA comprises a systematic method for analyzing latent failures and defects so that they can be prevented from manifesting themselves.

ISO 13849-1: 2008
PLr (Required performance level)

Performance level (PL) applied in order to achieve the required risk reduction


S: Severity of injury
S1: Slight (normally reversible injury)
S2: Serious (normally irreversible injury or death)

F: Frequency and/or exposure to hazard
F1: Seldom to less often and/or the exposure time is short
F2: Frequent to continuous and/or the exposure time is long

P: Possibility of avoiding hazard or limiting harm
P1: Possible under specific conditions
P2: Scarcely possible

- Reduce wiring and lower costs by daisy-chaining controllers and other safety equipment.

The controller's safety input function can be used to connect wiring used to daisy-chain controllers together as well as input from safety contacts (2NC) on emergency stop switches, safety door switches, and other devices. In this way, safety output can be aggregated onto a single line to reduce safety circuit wiring and lower costs.

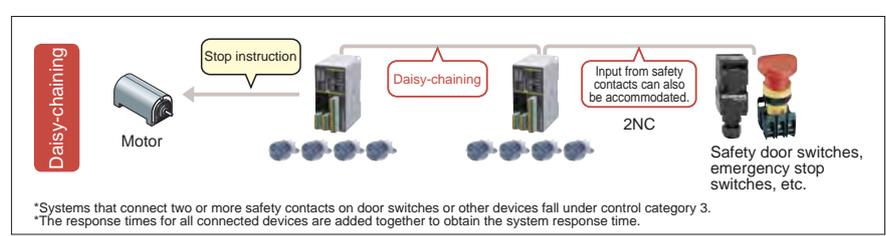

*Systems that connect two or more safety contacts on door switches or other devices fall under control category 3.
*The response times for all connected devices are added together to obtain the system response time.

PRODUCT CONFIGURATION

Whole set: Category 4, PL_e, SIL3

Sensor: Category 1, PL_c, SIL1

Sensor SQ4-A2□-□

Mounting bracket set
MS-SQ4-2□



Controller SQ4-C11

ORDER GUIDE

Sensors

| Type | Appearance | Sensing object (Note 1) | Model No. | Output |
|---------------------|---|---|-----------|-------------------------------|
| For standard liquid |  Material: Polypropylene | Water etc. | SQ4-A21-P | PNP open-collector transistor |
| | | | SQ4-A21-N | NPN open-collector transistor |
| For chemical liquid |  Material: PFA | Sulfuric acid, Hydrochloric acid, Phosphoric acid, Ammonia, Fluorinert (Note 2), Galden (Note 2) or Fluorine etc. | SQ4-A22-P | PNP open-collector transistor |
| | | | SQ4-A22-N | NPN open-collector transistor |

Notes: 1) The agents mentioned above are examples. It may not be detected depending on viscosity the agent. Before using this device, check the detecting liquid and installation condition.
2) Fluorinert™ is the world wide trademark of 3M. Galden is the world wide trademark of Solvay Solexis.

Mounting bracket set Make sure to purchase the sensor and controller as a set.

| Type | Appearance | | Sensing object | Model No. |
|---------------------|--|--|--|-----------|
| | Attachment | Mounting bracket | | |
| For standard liquid |  Material: Polypropylene |  Material: PVC | Water etc. | MS-SQ4-21 |
| For chemical liquid |  Material: PFA |  Material: PFA | Liquids with comparatively high surface tension such as Sulfuric acid, Hydrochloric acid, Phosphoric acid, and Ammonia | MS-SQ4-22 |
| | |  Material: PVC | Liquids with comparatively low surface tension such as Fluorinert (Note), Galden (Note), and Hydrogen fluoride | MS-SQ4-23 |
| | |  Material: PVC | Liquids such as low-concentration hydrogen fluoride | MS-SQ4-24 |


Note: Fluorinert™ is the world wide trademark of 3M. Galden is the world wide trademark of Solvay Solexis.

Connectors Make sure to purchase the connector when using the controller.

| Designation | Model No. | Description |
|--------------------------|-----------|---|
| Hook-up connector (e-CO) | CN-EP2 | For SQ4-A21-□ (PVC cable) It is used to connect to the controller. Yellow 5 pcs. per set |
| | CN-EP3 | For SQ4-A22-□ (PFA cable) It is used to connect to the controller. Orange 5 pcs. per set |

Hook-up connector

• CN-EP2 • CN-EP3



Controller

| Type | Appearance | Model No. | Description |
|-------------------|---|-----------|--|
| Safety controller |  | SQ4-C11 | Up to 4 safety liquid leak sensors can be connected. Control category 4, PL _e SIL3 |

SPECIFICATION

Sensors

| Item | Model No. | Type | For standard liquid | For chemical liquid |
|---|-----------|---|---------------------|--|
| | | PNP output | SQ4-A21-P | SQ4-A22-P |
| | | NPN output | SQ4-A21-N | SQ4-A22-N |
| Sensing object | | Water (Standard liquid) (Note 2) | | Sulfuric acid, Hydrochloric acid, Phosphoric acid, Ammonia, Fluorinert (Note 3), Galden (Note 3), Hydrofluoric acid etc. (Note 2) |
| Supply voltage | | 12 to 24 V DC $\pm 10\%$ Ripple P-P 10% or less | | |
| Current consumption | | 30 mA or less | | |
| Utilization category | | DC-12, DC-13 | | |
| Leakage detection output (Abnormal leakage detection, Safety output) | | <PNP output type> PNP open-collector transistor • Maximum source current: 50 mA • Applied voltage: Same as the supply voltage (between detection output and +V) • Residual voltage: 2.5 V or less (at 50 mA source current) | | <NPN output type> NPN open-collector transistor • Maximum sink current: 50 mA • Applied voltage: Same as the supply voltage (between detection output and 0 V) • Residual voltage: 2 V or less (at 50 mA sink current) |
| Response time | | 10 ms or less | | |
| Output operation | | ON when initial detection, OFF when detection leakage or wrong installation | | |
| Initial leakage detection output (Initial leakage, Non-safety output) | | <PNP output type> PNP open-collector transistor • Maximum source current: 50 mA • Applied voltage: Same as the supply voltage (between detection auxiliary output and +V) • Residual voltage: 2.5 V or less (at 50 mA source current) | | <NPN output type> NPN open-collector transistor • Maximum sink current: 50 mA • Applied voltage: Same as the supply voltage (between detection auxiliary output and 0 V) • Residual voltage: 2 V or less (at 50 mA sink current) |
| Response time | | 50 ms or less | | |
| Output operation | | ON when normal condition, OFF when initial detection or accidental leakage | | |
| Protection | | IP65 / IP67 (IEC) | | |
| Ambient temperature / humidity | | -10 to +55 °C +14 to +48.2 °F (No dew condensation or icing allowed) (Note 4), Storage: -10 to +55 °C +14 to +48.2 °F / 35 to 85 % RH, Storage: 35 to 85 % RH | | |
| Emitting element | | Infrared LED (modulated) | | |
| Material | | Enclosure: Polypropylene | | Enclosure: PFA |
| Cable | | 0.18 mm ² 4-core PVC cabtire cable, 2 m 6.562 ft long | | 0.1 mm ² 4-core PFA cabtire cable, 2 m 6.562 ft long |
| Weight | | Net weight: 45 g approx., Gross weight: 110 g approx. | | |

- Notes: 1) Where measurement conditions have not been specified precisely, the conditions used were an ambient temperature of +20 °C +68 °F.
 2) The agents mentioned above are examples. It may not be detected depending on viscosity the agent.
 Before using this device, check the detecting liquid and installation condition.
 3) Fluorinert™ is the world wide trademark of 3M. Galden is the world wide trademark of Solvay Solexis.
 4) Liquid being detected should be also kept within the rated ambient temperature range.

Controller

| Item | Model No. | SQ4-C11 |
|--|---|---|
| Applicable standards | International standard | ISO 13849-1 (Category 4, PL _e), IEC 60947-5-2, IEC 61508-1 to 7 (SIL3), IEC 62061 (SIL3) |
| | Japan | JIS B 9705-1 (Category 4), JIS C 0508-1 to 7 (SIL3) |
| | Europe (EU) (Note 2) | EN 60947-5-2, EN 55011 Class A, EN 61000-6-2, EN 50178, EN ISO 13849-1 (Category 4, PL _e), EN 61508-1 to 7 (SIL3) |
| | North America (Note 3) | ANSI/UL 508, CAN/CSA C22.2 No.14 |
| | South Korea | S1-G-1-2009, S2-W-5-2009 |
| | SEMI | Conforming to SEMI-S2-0310a |
| Power voltage | 24 V DC ⁺¹⁰ / ₋₁₅ % Ripple P-P 10% or less | |
| Consumption current | 200 mA or less | |
| Control output (OSSD 1, OSSD 2) | PNP open-collector transistor / NPN open-collector transistor (switch method) <Selecting PNP output> • Maximum source current: 200 mA • Applied voltage: Same as power voltage (between control output to +V) • Residual voltage: 2.5 V or less (at 200 mA source current) | |
| | <Selecting NPN output> • Maximum sink current: 200 mA • Applied voltage: Same as power voltage (between control output to 0 V) • Residual voltage: 2.0 V or less (at 200 mA sink current) | |
| | Response time | 20 ms or less (excluding the response time of the sensor) |
| | Operation mode (Output operation) | ON when initial detection, OFF when detection leakage or wrong installation |
| Utilization category | DC-12, DC-13 | |
| Sensor monitor output (AUX1, 2, 3, 4, Non-safety output) | PNP open-collector transistor / NPN open-collector transistor (switch method) <Selecting PNP output> • Maximum source current: 60 mA • Applied voltage: Same as power voltage (between sensor monitor output to +V) • Residual voltage: 2.5 V or less (at 60 mA source current) | |
| | <Selecting NPN output> • Maximum sink current: 60 mA • Applied voltage: Same as power voltage (between sensor monitor output to 0 V) • Residual voltage: 2.0 V or less (at 60 mA sink current) | |
| | Response time | 100 ms or less (excluding the response time of the sensor) |
| | Operation mode (Output operation) | ON when normal condition, OFF when initial detection or accidental leakage |
| Utilization category | DC-12, DC-13 | |
| Lockout output | OFF for lockout (Rating: Same as sensor monitor output) | |
| Auxiliary output | Negative logic output of control output 1 / 2 (OSSD 1 / 2) (Rating: Same as sensor monitor output) [Auxiliary output ON when control output 1 / 2 (OSSD 1/2) is OFF] | |
| Functions | Interlock / lockout cancel / Test input / External device monitor / Safety input / Control output polarity selection / Non-safety output polarity selection / Sensor connection number setting | |
| Protection | IP20 (IEC) (However, it should be in IP54 protection structure of control panel) | |
| Ambient temperature / humidity | -10 to +55 °C +14 to +48.2 °F (No dew condensation or icing allowed), Storage: -10 to +55 °C +14 to +48.2 °F / 35 to 85 % RH, Storage: 35 to 85 % RH | |
| PFH _D | 2.55 × 10 ⁻⁹ (when connecting 4 safety liquid connecting sensors) | |
| MTTF _d | 100 years or more | |
| Material | Main unit case: PC / ABS (alloy) | |
| Weight | Net weight: 170 g approx., Gross weight: 440 g approx. | |


- Notes: 1) Where measurement conditions have not been specified precisely, the conditions used were an ambient temperature of +20 °C +68 °F.
 2) Regarding EU Machinery Directive, a Notified Body, TÜV SÜD, has certified with the type examination certificate.
 3) With regards to the standards in the US, under the US regulation 29 CFR 1910.7, TÜV SÜD, a Nationally Recognized Testing Laboratory (NRTL) certified by OSHA, has certified with the safety certificate based on UL / ANSI standards.
 With regards to the standards in Canada, under the safety regulations based on CEC (Canadian Electric Code), TÜV SÜD, a Certification Body accredited by SCC, has certified with the safety certificate based on CSA standards.

I/O CIRCUIT AND WIRING DIAGRAMS

Sensors


SQ4-A□-N

NPN output type

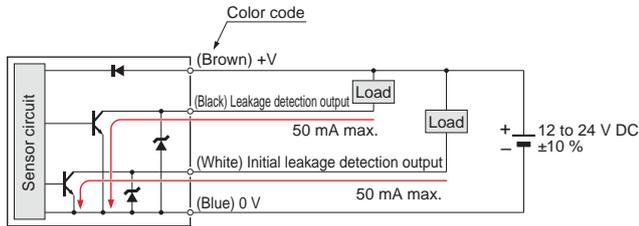

SQ4-A□-P

PNP output type

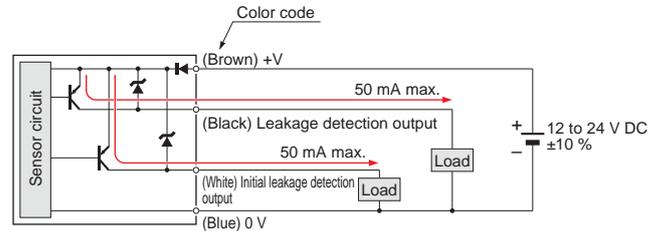


Controller


SQ4-C11

Controller


For operation with PNP output

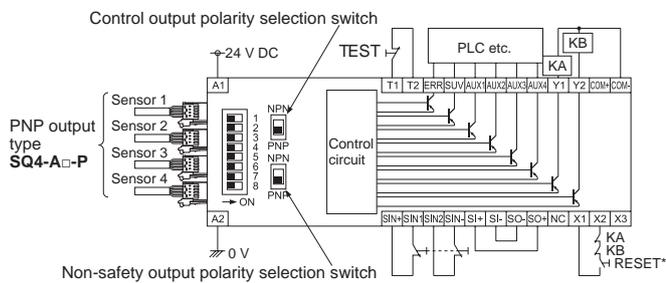

For operation with NPN output

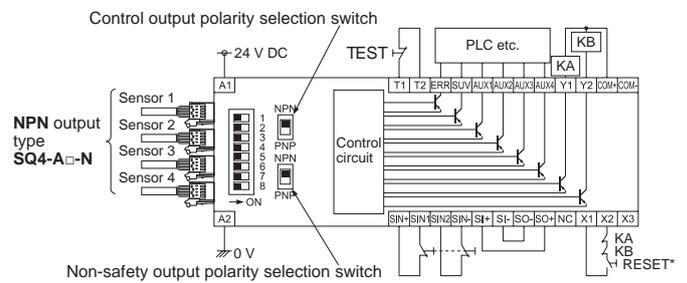

*RESET

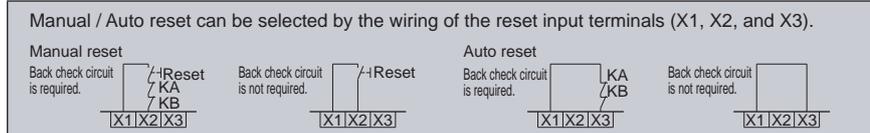

KA, KB: External devices

(Forced guide relay, magnet contactor or monitored valve)

PRECAUTIONS FOR PROPER USE



- This product is a sensor for detecting leak of fluids.
- When this product is used with safety devices, construct the system such that the device itself.

- This device has been developed / produced for industrial use only.
- Before using this device, check whether the device performs properly with the functions and capabilities as per the design specifications.
- Avoid using this device in an explosive atmosphere because this product does not have an explosive-proof protective construction.


Installation



- There is the detection mount difference by directivity of a liquid leakage. When there are a direction from which a liquid leakage happens, and an inclination, please install the nose-of-cam side (opposite side of a cable) of a sensor towards a top.
- Use the mounting bracket **MS-SQ4-□** (optional) which suits the liquid to detect.
- Periodical checking of operation is recommended with the liquids which are not dangerous (water, alcohol, etc.).
- The amount of detection may change with the conditions of the installation surface.
- Be sure to use the mounting bracket **MS-SQ4-□** (optional) when installing this device to avoid human error, etc. Reliable detection cannot be guaranteed when this sensor is used alone.

Leakage detection condition and variation factor

- Leak detection part of this product properly detects the leakage in the following condition.
 - Detection range: Area except backward of this product (liquid must enter to the detection range)
 - Material of installation surface: Hard vinyl chloride or Stainless steel
 - Surface condition for installation: Glossy surface (surface roughness: corresponding 0.4 μmRa) and clean surface.
 - Installation surface angle: Horizontal



Detection range


- This product may not detect properly liquid in following element.
 - Liquid kind, consistency (surface tension) and air bubble incorporation.
 - Material, roughness, angle, dirtiness and liquid absorption of surface of installed surface of sensor.
 - Wrong selection of dedicated mounting bracket.
- Check the detecting liquid and the installation condition before use.

DIMENSIONS (Unit: mm in)

SQ4-A21-□

Sensor


Assembly dimensions with mounting bracket for MS-SQ4-21

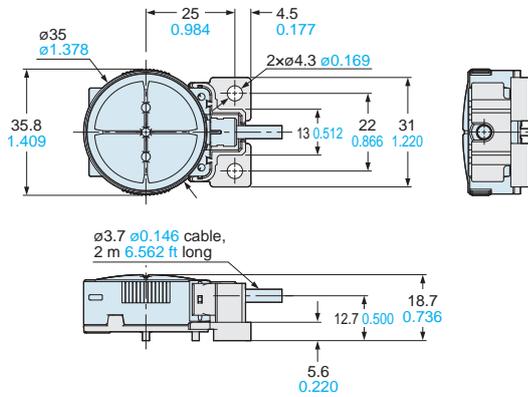

SQ4-A22-□

Sensor

Assembly dimensions with mounting bracket

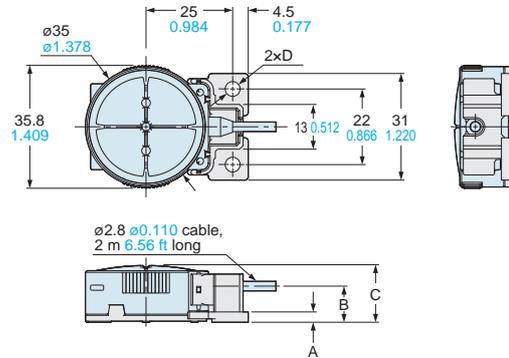


| Mounting bracket set model No. | A | B | C | D |
|--------------------------------|-----------|------------|------------|----------------------------|
| MS-SQ4-22 | 5.4 0.213 | 12.7 0.500 | 18.7 0.736 | 2x ϕ 4.2 ϕ 0.165 |
| MS-SQ4-23 | 3.4 0.134 | 10.5 0.413 | 16.5 0.650 | 2x ϕ 4.3 ϕ 0.169 |
| MS-SQ4-24 | 5.6 0.220 | 12.7 0.500 | 18.7 0.736 | 2x ϕ 4.3 ϕ 0.169 |

MS-SQ4-□

Mounting bracket set

Attachment

PVC / PFA mounting bracket

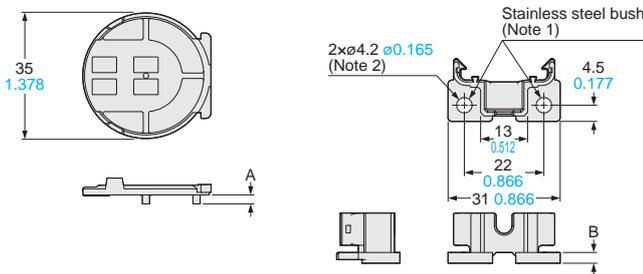


| Model No. | A | B |
|-----------|-----------|-----------|
| MS-SQ4-21 | 2.5 0.098 | 5.6 0.220 |
| MS-SQ4-22 | 2.5 0.098 | 5.4 0.213 |
| MS-SQ4-23 | 0.3 0.012 | 3.4 0.134 |
| MS-SQ4-24 | 2.5 0.098 | 5.6 0.220 |

Notes: 1) Drawing above is for PFA mounting bracket. PVC mounting brackets do not incorporate stainless steel bushes.

2) The size of mounting holes is ϕ 4.3 mm ϕ 0.169 in

SQ4-C11

Controller

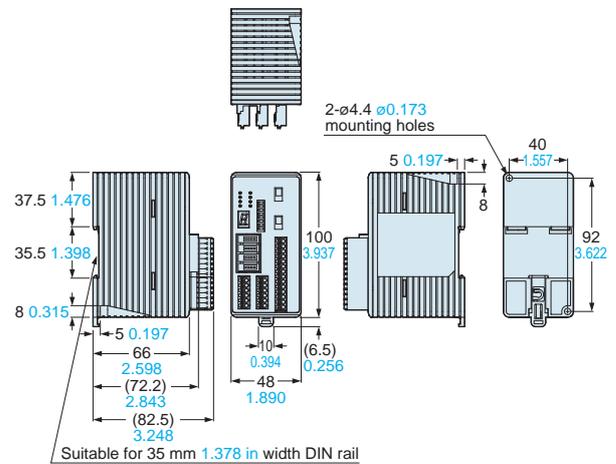

Panasonic[®]