
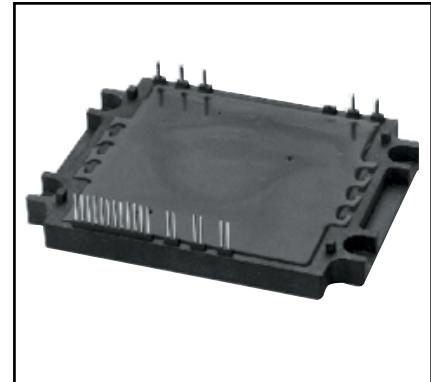


Powerex, Inc., 200 E. Hillis Street, Youngwood, Pennsylvania 15697-1800 (724) 925-7272

Intellimod™ Module
Application Specific IPM
25 Amperes/1200 Volts

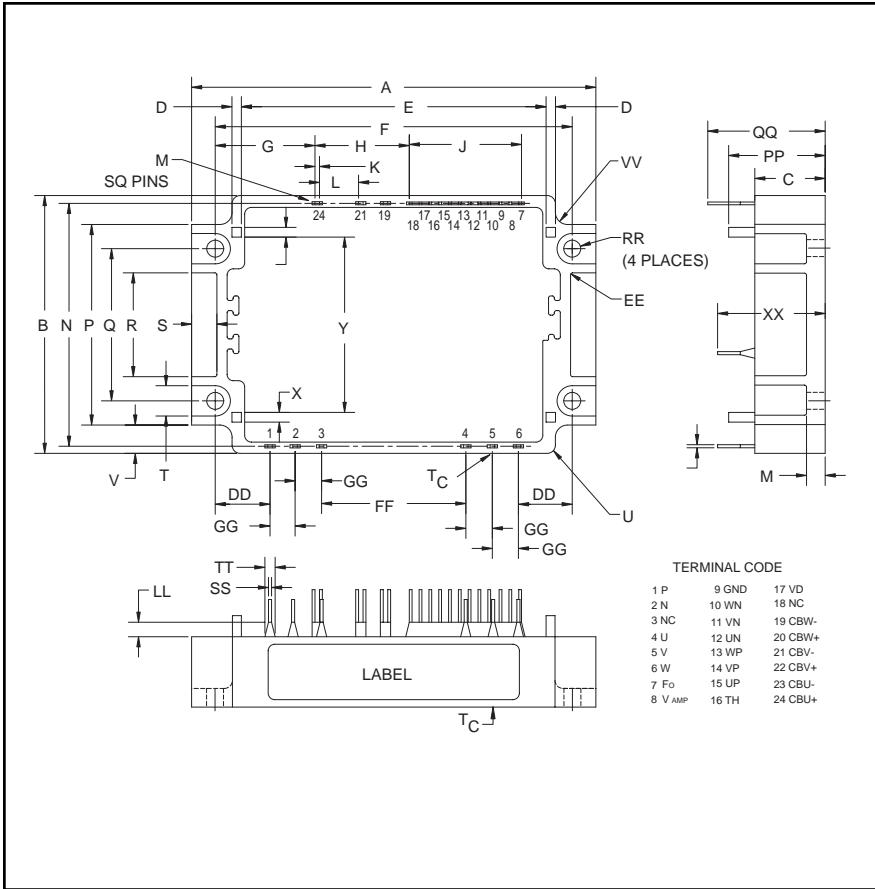

Description:

Powerex Application Specific IPMs (ASIPMs) are intelligent power modules that integrate power devices, gate drive and protection circuitry in a compact package for use in small inverter applications up to 20kHz. Use of application specific HVICs allow the designer to reduce inverter size and overall design time.

Features:

- 3-phase IGBT Inverter Bridge
- Integrated HVICs for Gate Drive, Protection and System Control Functions
- Built-in Thermistor
- Direct Connection to DSP/CPU

Applications:

- Smart Motors
- General Purpose Inverters
- Small Motor Control

Ordering Information:

PS12038 is a 1200V, 25 Ampere Application Specific Power Module.

Outline Drawing and Circuit Diagram

Dimensions	Inches	Millimeters
A	4.06 +0/-0.02	103.0+0/-0.4
B	3.19 +0/-0.02	81.0 +0/-0.4
C	0.35	9.0
D	0.10	2.5
E	3.11	79.0
F	3.74±0.01	95±0.2
G	1.32	33.5
H	0.95	24.0
J	0.87	22.0
K	0.08	2.0
L	0.24	6.0
M	0.02 Sq.	0.5 Sq.
N	3.03	77.0
P	2.44	62.0
Q	1.85±0.01	47.0±0.2
R	1.26	32.0
S	0.26	6.5
T	0.35	9.0

Dimensions	Inches	Millimeters
U	0.04 Rad.	1.0 Rad.
V	0.37	9.5
W	0.04	1.0
X	0.12	3.0
Y	2.13	0.54
DD	0.47	12.0
EE	0.08 Rad.	2.0 Rad.
FF	1.60	40.52
GG	0.30	7.62
LL	0.08	2.0
MM	0.12	3.0
PP	0.49	12.5
QQ	0.80	20.4
RR	0.16 Dia.	4.0 Dia.
SS	0.04	1.0
TT	0.06	1.5
VV	0.16	4.0
XX	0.67 Rad.	17 Rad.



Powerex, Inc., 200 E. Hillis Street, Youngwood, Pennsylvania 15697-1800 (724) 925-7272

PS12038

Intellimod™ Module

Application Specific IPM

25 Amperes/1200 Volts

Absolute Maximum Ratings, $T_j = 25^\circ\text{C}$ unless otherwise specified

Characteristics	Symbol	PS12038	Units
Power Device Junction Temperature*	T_j	-20 to 125	°C
Storage Temperature	T_{stg}	-40 to 125	°C
Case Operating Temperature (See T_C Measure Point Illustration)	T_C	-20 to 100	°C
Mounting Torque, M3.5 Mounting Screws	—	11.25	in-lb
Module Weight (Typical)	—	137	Grams
Isolation Voltage**	V_{ISO}	2500	Volts

*The indicated values are specified considering the safe operation of all the parts within the ASIPM. The maximum rating for the ASIPM power chips (IGBT & FWDi) is $T_j < 150$.

**60 Hz sinusoidal AC applied between all terminals and the base plate for 1 minute.

IGBT Inverter Sector

Supply Voltage (Applied between P - N)	V_{CC}	900	Volts
Supply Voltage, Surge (Applied between P - N, Surge-Value)	$V_{CC(\text{surge})}$	1000	Volts
Each IGBT Collector-Emitter Static Voltage (Applied between P-U-V-W, U-V-W-N)	V_P or V_N	1200	Volts
Each IGBT Collector-Emitter Switching Voltage (Applied between P-U-V-W, U-V-W-N (Pulse))	$V_{P(S)}$ or $V_{N(S)}$	1200	Volts
Each IGBT Collector Current, $T_C = 25^\circ\text{C}$, "()" means I_C Peak Value	$\pm I_C$ ($\pm I_{CP}$)	± 25 (± 50)	Amperes

Control Sector

Supply Voltage	V_D, V_{DB}	-0.5 ~ 20	Volts
Input Signal Voltage	V_{CIN}	-0.5 ~ 7.5	Volts
Fault Output Supply Voltage	V_{FO}	-0.5 ~ 7.5	Volts
Fault Output Current	I_{FO}	15	mA
DC-link IGBT Current Signal Amp Output Current	I_{AMP}	1	mA

PS12038

Intellimod™ Module


Application Specific IPM

25 Amperes/1200 Volts

Electrical and Mechanical Characteristics, $T_j = 25^\circ\text{C}$ unless otherwise specified

Characteristics	Symbol	Test Conditions	Min.	Typ.	Max.	Units
IGBT Inverter Sector						
Collector-Emitter Saturation Voltage	$V_{CE(\text{sat})}$	$I_C = 25\text{A}, T_j = 25^\circ\text{C}, V_D = V_{DB} = 15\text{V},$ Input = ON (Shunt Voltage Drop Not Included)	—	—	3.6	Volts
Diode Forward Voltage	V_{EC}	$T_j = 25^\circ\text{C}, -I_C = 25\text{A}$	—	—	3.5	Volts
Switching Times	t_{on}	1/2 Bridge Inductive, Input = $5\text{V} \leftrightarrow 0\text{V}$,	0.3	1.2	2.0	μs
	$t_{C(on)}$	$V_{CC} = 600\text{V}, I_C = 25\text{A}, T_j = 125^\circ\text{C},$	—	0.5	1.4	μs
	t_{off}	$V_D = 15\text{V}, V_{DB} = 15\text{V}$	—	2.2	4.0	μs
	$t_{C(off)}$	Note: t_{on}, t_{off} include delay time of	—	0.9	1.6	μs
FWDi Reverse Recovery Time	t_{rr}	the internal control circuit.	—	0.02	—	μs
Short-circuit Endurance (Output, Arm, and Load Short-circuit Modes)		$@V_{CC} \leq 800\text{V}, \text{Input} = 5\text{V} \rightarrow 0\text{V}$ (One-shot), $-20^\circ\text{C} \leq T_j(\text{start}) \leq 125^\circ\text{C},$ $13.5\text{V} \leq V_D = V_{DB} \leq 16.5\text{V}$	<ul style="list-style-type: none"> • No Destruction • F_O Output by Protection Operation 			
Switching SOA		$@V_{CC} \leq 800\text{V}, \text{Input} = 5\text{V} \rightarrow 0\text{V},$ $T_j \leq 150^\circ\text{C}, I_C < \text{OC Trip Level},$ $13.5\text{V} \leq V_D = V_{DB} \leq 16.5\text{V}$	<ul style="list-style-type: none"> • No Destruction • No Protecting Operation • No F_O Output 			

T_C Measure Point

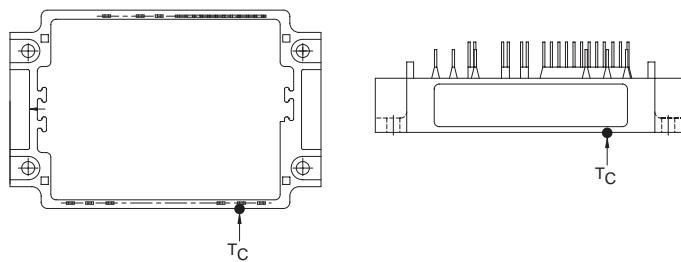



Powerex, Inc., 200 E. Hillis Street, Youngwood, Pennsylvania 15697-1800 (724) 925-7272

PS12038

Intellimod™ Module

Application Specific IPM

25 Amperes/1200 Volts

Electrical and Mechanical Characteristics, $T_j = 25^\circ\text{C}$ unless otherwise specified

Characteristics	Symbol	Test Conditions	Min.	Typ.	Max.	Units	
Control Sector							
Circuit Current (Average)	I_D	$T_j = 25^\circ\text{C}, V_D = 15\text{V}, V_{IN} = 5\text{V}$	—	—	50	mA	
	I_{DB}	$T_j = 25^\circ\text{C}, V_D = V_{DB} = 15\text{V}, V_{IN} = 5\text{V}$	—	—	5	mA	
Input ON Threshold Voltage	$V_{th(on)}$		0.8	1.4	2.0	Volts	
Input OFF Threshold Voltage	$V_{th(off)}$		2.5	3.0	4.0	Volts	
Input Pull-up Resistor	R_i	Applied between Input Terminal-inside Power Supply	—	50	—	kΩ	
PWM Input Frequency	f_{PWM}	$T_C \leq 100^\circ\text{C}, T_j \leq 125^\circ\text{C}$	—	10	15	kHz	
Arm Shoot-through Blocking Time*	t_{DEAD}	Relates to Corresponding Inputs $T_C = -20^\circ\text{C} \sim 100^\circ\text{C}$	4.0	—	—	μS	
Input Interlock Sensing	t_{int}	Relates to Corresponding Input	—	100	—	ns	
Inverter DC-link IGBT Current	$V_{amp\ 100\%}$	$I_C = I_{OP}(100\%), V_D = 15\text{V}, T_j = 25^\circ\text{C}$	1.5	2.0	2.5	Volts	
Sense Voltage Output Signal**	$V_{amp\ 200\%}$	$I_C = I_{OP}(200\%), V_D = 15\text{V}, T_j = 25^\circ\text{C}$	3.0	4.0	5.0	Volts	
Inverter DC-link IGBT Current	$V_{amp\ 250\%}$	$I_C = I_{OP}(250\%), V_D = 15\text{V}$	5.0	—	—	Volts	
Sense Voltage Output Limit**	$V_{amp\ 0\%}$	$I_C = I_{OP}(0\%), V_D = 15\text{V}$	—	50	100	mV	
Over-current Trip Level	OC		39.0	46.5	—	Amperes	
Over-current Delay Time	t_{OC}	$T_j = 25^\circ\text{C}$	—	10	—	μS	
Short-circuit Trip Level	SC		—	69.7	—	Amperes	
Short-circuit Delay Time	t_{SC}		—	2	—	μS	
	Trip Level	UV_D	11.0	12.0	12.75	Volts	
Supply Circuit	Reset Level	UV_{Dr}	11.5	12.5	13.25	Volts	
Under-voltage	Trip Level	UV_{DB}	$T_C = T_j = 25^\circ\text{C}$	10.1	10.8	11.6	Volts
Protection	Reset Level	UV_{DBr}		10.6	11.3	12.1	Volts
	Delay Time	t_{dV}	—	10	—	μS	
Fault Output Pulse Width***	t_{FO}	$T_j = 25^\circ\text{C}$	1.0	1.8	—	mS	
Fault Output Current***	$I_{FO(H)}$	Open Collector Output	—	—	1	μA	
	$I_{FO(L)}$		—	—	15	mA	
Thermistor Resistance	R_{TO}	$T_O = 25^\circ\text{C} (298\text{K})$	9.5	10	10.5	kΩ	
Material Constant****	β	$T_1 = 25^\circ\text{C}, T_2 = 50^\circ\text{C}$	—	3450	—	K	

* The dead-time has to be set externally by the CPU; it is not part of the ASIPM internal functions.

**Refer to the graph on next page.

***Fault output signalling is given only when the internal OC, SC, and UV protection circuits are activated. The OC, SC and UV protection (and fault output) operate for the lower arms only. The OC and SC protection fault output is given in a pulse format while that of UV protection is maintained throughout the duration of the under-voltage condition.

$$****T = \frac{1}{\frac{1}{\beta} \cdot \ln \left[\frac{R_T}{R_{TO}} \right] + \frac{1}{T_O}}$$

PS12038

Intellimod™ Module

Application Specific IPM


25 Amperes/1200 Volts

Thermal Characteristics

Characteristic	Symbol	Condition	Min.	Typ.	Max.	Units
Junction to Case	$R_{th(j-c)Q}$	Each IGBT	—	—	1.5	°C/Watt
	$R_{th(j-c)D}$	Each FWDi	—	—	2.0	°C/Watt
Contact Thermal Resistance	$R_{th(c-f)}$	Case to Fin Per Module. Thermal Grease Applied	—	—	0.045	°C/Watt

Recommended Conditions for Use

Characteristic	Symbol	Condition	Min.	Typ.	Value	Units
Supply Voltage	V_{CC}	Applied across P2-N2 Terminals	—	600	800	Volts
Control Supply Voltage	V_D	Applied between V_D -GND	13.5	15.0	16.5	Volts
	V_{DB}	Applied between CBU+ & CBU-, CBV+ & CBV-, CBW+ & CBW-	13.5	15.0	16.5	Volts
Control Supply dv/dt	$dV_D/dt, dV_{DB}/dt$		-1	—	1	V/ μ s
Input ON Voltage	$V_{CIN(on)}$	Applied between	0	—	0.8	Volts
Input OFF Voltage	$V_{CIN(off)}$	$U_P, V_P, W_P, U_N, V_N, W_N$ -GND	4.0	—	5.0	Volts
Module Case Operating Temperature	T_C		—	—	100	°C
PWM Input Frequency	f_{PWM}	$T_C \leq 100^\circ\text{C}, T_j \leq 125^\circ\text{C}$	—	—	15	kHz
Allowable Minimum Input On-pulse Width	t_{XX}		1	—	—	μ s
Arm Shoot-through Blocking Time	t_{DEAD}	Relate to Corresponding Inputs	4.0	—	—	μ s









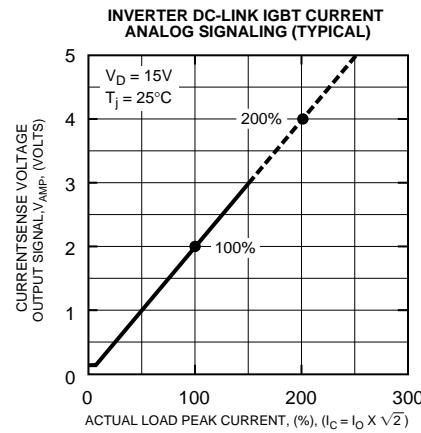


PS12038

Intellimod™ Module










Application Specific IPM

25 Amperes/1200 Volts

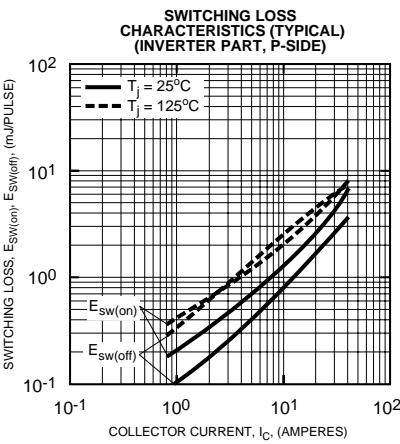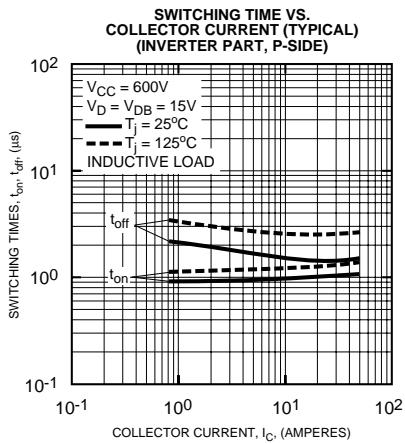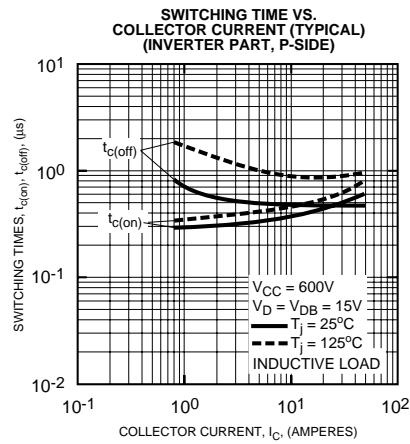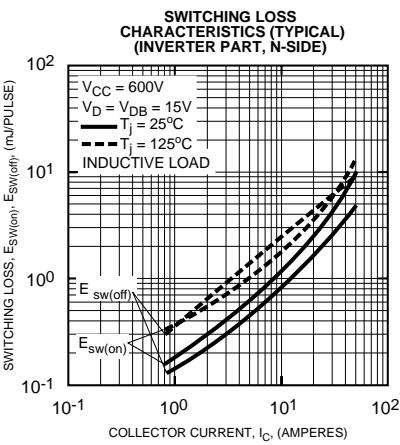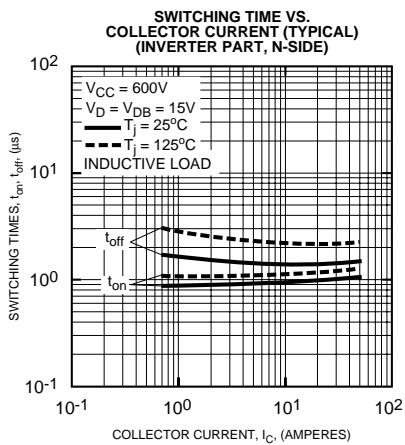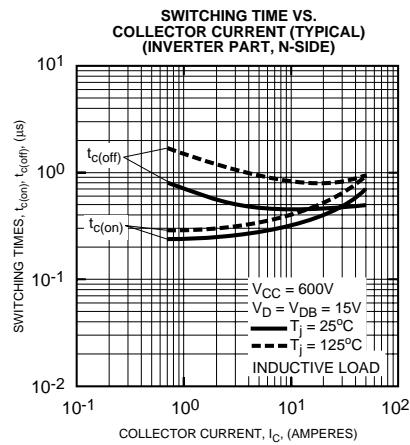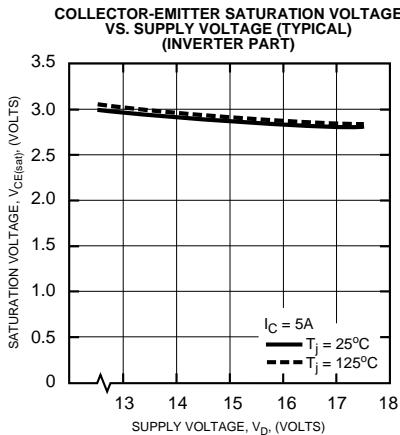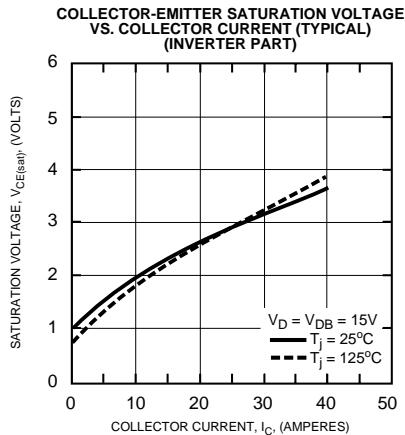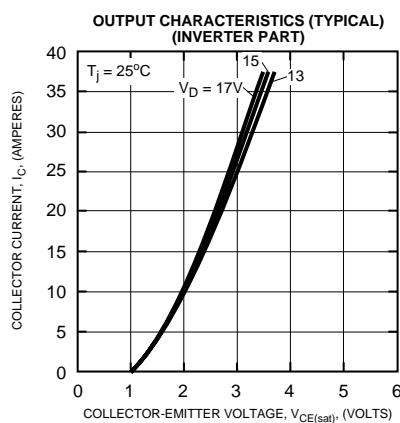

PS12038

Intellimod™ Module
Application Specific IPM
 25 Amperes/1200 Volts

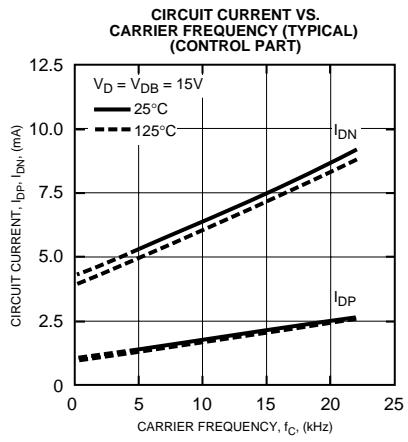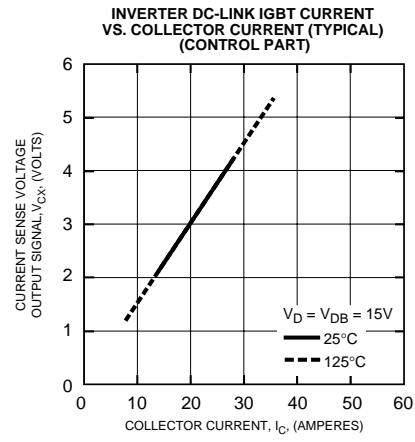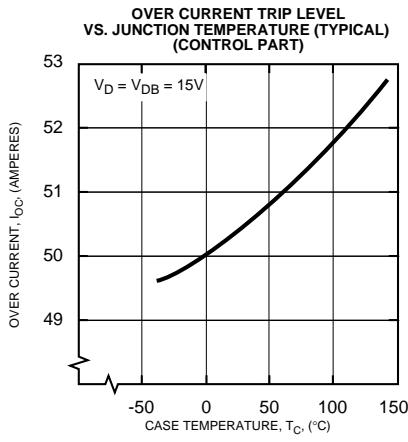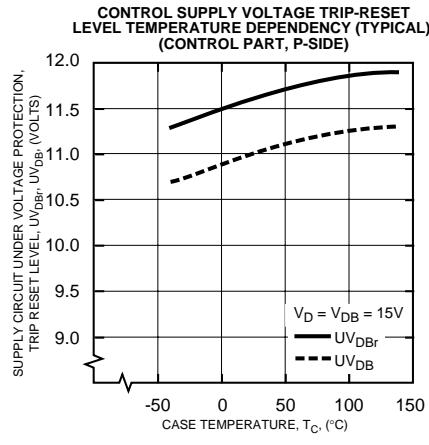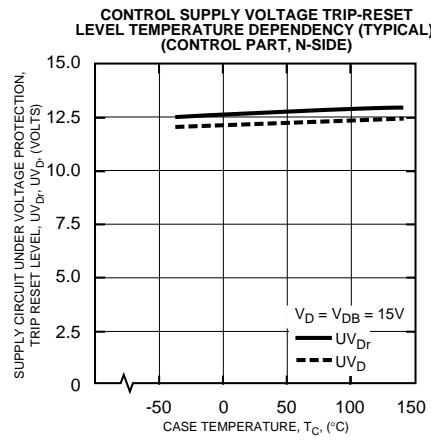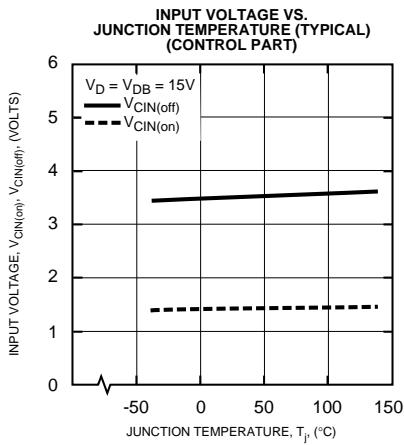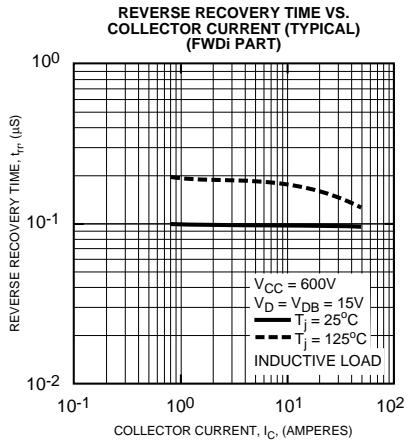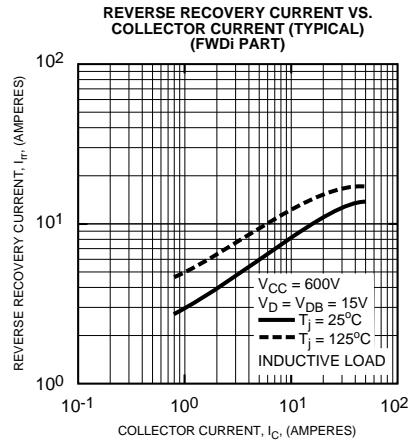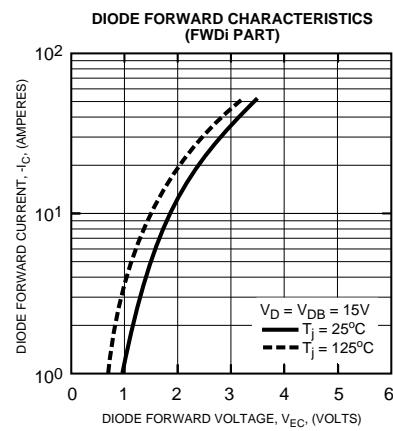

PS12038

Intellimod™ Module

Application Specific IPM

25 Amperes/1200 Volts

Functional Block Diagram

