Shock-Safe Fuseholder, 5 x 20 / 6.3 x 32 mm, Slotted Cap/Fingergrip, IEC: 500 VAC, UL/CSA: 600 VAC/DC





Socket with Slotted Cap Caps must be ordered separately (see accessories) Socket with Fingergrip Cap

500 VAC · 4 W / 10 A (VDE) · 600 VAC/DC · 20 A (UL/CSA)

Description

Technical Date

- Fuseholder for 500 VAC applications
- Cap is available slotted or with fingergrip
- 5x20: 3.2W / 6.3x32: 4W

See below: Approvals and Compliances

Applications

- Equipment with three-phase supply (400 VAC)

Weblinks

pdf data sheet, html datasheet, General Product Information, Packaging details, Distributor-Stock-Check, Accessories, Detailed request for product, Microsite

Technical Data	
Shock-Safe Category	PC2
Fuse-Link	5 x 20 or 6.3 x 32 mm
Mounting	Panel mount, Front Side
Attachment	Fixing Nut
Terminal	Solder or Quick-Connect 6.3 x 0.8 mm
Rated Voltage	500 VAC (VDE), 600 VAC/DC (UL/CSA)
Rated current	10A (VDE), 20A (UL/CSA)
Rated Power Acceptance IEC	4W / 10A @ Ta 23 °C
	3.2 W / 10 A for 5x20 mm fuse-link, see
	derating curves
Degree of Protection	IP 40
Protection Class	Suitable for appliances with protection
	class I acc. to IEC 61140
Admissible Ambient Air Temp.	-40 °C to 85 °C
Climatic Category	40/085/21 acc. to IEC 60068-1
Material: Socket	Thermoset, black, UL 94V-0
Material: Terminals	Tin-Plated Copper Alloy
Unit Weight	9 g / 5.36 g
Storage Conditions	0 °C to 60 °C, max. 70% r.h.
Product Marking	Type, Rated Voltage, Power Rating, Rated current, Certification marks

Soldering Methods	Iron
	Soldering Profile
Solderability	350 °C / 2 sec acc. to IEC 60068-2-20, Test Ta, method 2
Resistance to Soldering Heat	350 °C / 10 sec acc. to IEC 60068-2-20, Test Tb, method 2
Contact Resistance	≤ 10 mΩ at 100 mA acc. to IEC 60127-6
Dielectric Strength	> 3 kV > 4 kV between life parts (50 Hz: 1 min)
Impulse Withstand Voltage	> 4 kV between life parts > 6 kV between life parts
Insulation Resistance	> $10 M\Omega$ between life parts > $100 M\Omega$ between life parts (500 VDC: 1 min)
Overvoltage Category	II acc. to IEC 60664-1
Pollution Degree	2 acc. to IEC 60664-1
Admissible Torque on Fixing Nut	max 1.2Nm
Panel Thickness	max 9mm

Approvals and Compliances

Detailed information on product approvals, code requirements, usage instructions and detailed test conditions can be looked up in Details about Approvals

SCHURTER products are designed for use in industrial environments. They have approvals from independent testing bodies according to national and international standards. Products with specific characteristics and requirements such as required in the automotive sector according to IATF 16949, medical technology according to ISO 13485 or in the aerospace industry can be offered exclusively with customer-specific, individual agreements by SCHURTER.


Approvals

The approval mark is used by the testing authorities to certify compliance with the safety requirements placed on electronic products. Approval Reference Type: FEC

Approval Logo	Certificates	Certification Body	Description
VDE	VDE Approvals	VDE	VDE Certificate Number: 137910
c PL [®] us	UL Approvals	UL	UL File Number: E39328


Product standa			
	that are referenced		
Organization	Design	Standard	Description
IEC	Designed according to	IEC 60127-6	Miniature fuses. Part 6. Fuse-holders for miniature fuse-links
(UL)	Designed according to	UL 4248-1	Fuseholder general requirements
CSA Broup	Designed according to	CSA C22.2 no. 4248.1	Fuseholder general requirements
Application star	ndards		
Application standa	rds where the product can be used		
Organization	Design	Standard	Description
IEC	Designed for applications acc.	IEC/UL 62368-1	IEC 62368-1 includes the basic requirements for safety of audio, video, information technology and office equipment.
IEC.	Designed for applications acc.	IEC 60335-1	Safety of electrical appliances for household and similar purposes. Meets the requirements for appliances in unattended use. This includes the enhanced requirements of glow wire tests acc. to IEC 60695-2-11 or -12 & -13.
Compliances			
The product comp	lies with following Guide Lines		
Identification	Details	Initiator	Description
CE	CE declaration of conformity	SCHURTER AG	The CE marking declares that the product complies with the applicable requirements laid down in the harmonisation of Community legislation on its affixing in accordance with EU Regulation 765/2008.
	RoHS	SCHURTER AG	Directive RoHS 2011/65/EU, Amendment (EU) 2015/863
51	China RoHS	SCHURTER AG	The law SJ / T 11363-2006 (China RoHS) has been in force since 1 March 2007. It is similar to the EU directive RoHS.
REACH	REACH	SCHURTER AG	On 1 June 2007, Regulation (EC) No 1907/2006 on the Registration, Evaluation, Authorization and Restriction of Chemicals 1 (abbreviated as "REACH") entered into force.
00	White Paper Glow wire test	SCHURTER AG	Meets the requirements of IEC 60335-1 for appliances in unattended use. This includes the enhanced requirements of glow wire tests acc. to IEC 60695-2-11 or -12 &-13.

Dimension [mm]

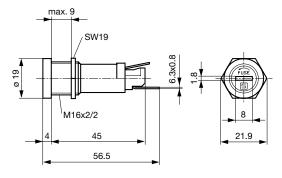


Variant with slotted cap 0031.1631 + 0031.1611/1613

56.5 mm






Variant Fingergrip 0031.1631 + 0031.1616



Mounting holes

Derating Curves

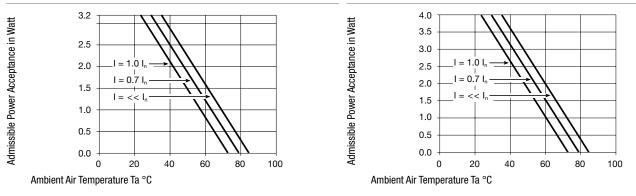

All Variants

Holder	Сар	Fuse-Link	Terminal	Degree of Pro-	Remark	Order Number
				tection		
•	-	5 x 20 or 6.3 x 32mm	Solder	IP40	-	0031.1631
•	-	5 x 20 or 6.3 x 32mm	Quick-Connect 6.3 x 0.8 mm	IP40	-	0031.1623
•	slotted	6.3 x 32mm	Quick-Connect 6.3 x 0.8 mm	IP40	0031.1623 + 0031.1613	0031.1622
•	Fingergrip	6.3 x 32mm	Quick-Connect 6.3 x 0.8 mm	IP40	0031.1623 + 0031.1616	0031.1624
•	slotted	5 x 20mm	Quick-Connect 6.3 x 0.8 mm	IP40	0031.1623 + 0031.1611	0031.1621
•	slotted	5 x 20mm	Solder	IP40	0031.1631 + 0031.1611	0031.1632
•	slotted	6.3 x 32mm	Solder	IP40	0031.1631 + 0031.1613	0031.1633
•	Fingergrip	6.3 x 32mm	Solder	IP40	0031.1631 + 0031.1616	0031.1634

Most Popular.

Availability for all products can be searched real-time:https://www.schurter.com/en/Stock-Check/Stock-Check-SCHURTER

Packaging Unit Bulk (50 pcs.)

Required Accessory



Description

Caps to Holder FEC

Accessories



Nut for fuse holder Mounting accessories for fuse holder

The specifications, descriptions and illustrations indicated in this document are based on current information. All content is subject to modifications and amendments. Information furnished is believed to be accurate and reliable. However, users should independently evaluate the suitability and test each product selected for their own applications.