



1-1414415-0

Rev. A

26 April 2017

## DATA SHEET - HOLLOW SHAFT RESOLVER


PN	1-1414415-0				
Description:	V23401	U6119-B609			
Size	21				
Shaft inner diameter [mm]	17 F7				
Speed - pair of poles - [pp]	1				
Application Spec					
Test protocol	100% EOL testing, stored. Available up on request				
Electrical parameters (at 22°C):					
Input voltage nom. [Vrms]	5	DC resistance R1R2 [Ω]	45		
Frequency nom. [kHz]	4	R1R2 tolerance [±Ω]	6,75		
Input current max [mA]	50	DC resistance S1S3 or S2S4 [Ω]	58		
Transformation ratio rT [±]	0,5	S1S3 or S2S4 tolerance [±Ω]	5,8		
Transf. ratio tolerance [%]	5	Based on nominal Input voltage and Frequency			
Phase shift min [°]	-1				
Phase shift max [°]	9				
Angular Error [±']	8				
Residual voltage max [mV]	15				
Connect. Wire Length [mm]	230, AWG 26 Teflon Isolated				
High Voltage test	Voltage: 500 $V_{AC} \pm 3\%$ (A)	Measured between:			
	250 $V_{AC} \pm 3\%$ (B)	A: Winding R1-R2 and housing			
	Time: 1s	Winding S1-S3 and housing Winding S2-S4 and housing			
Isolation test	Voltage: 500 $V_{DC} \pm 5\%$ (A, B)	B: Windings S1-S3 and S2-S4			
	Criterium: $R_{isol.} > 50M\text{ Ohm}$				
"Zero" setting:	Ele. "0" is when Winding Us2-s4 = 0 and Us1-s3 are in phase with Ur1-r2				
Transformation function	Function applies to the clockwise rotation of the rotor when looking at the (grooveless) transformer component from the top				
	$U_{S1-S3} = + rT * U_{R1-R2} * \cos(pp * \varphi)$				
	$U_{S2-S4} = + rT * U_{R1-R2} * \sin(pp * \varphi)$				
Rotor Inertia	approx.	$20\text{ g/cm}^2$			
Max. Rotational Speed	20.000 rpm				
Shock resistance (11ms sine)	1.000 m/s2				
Vibration (0 ... 2 kHz)	200 m/s2				
Operating temp.	-55°C...+150°C				

© 2015 TE Connectivity family of companies

All Rights Reserved

| Indicates Change

\*Trademark. TE Connectivity, TE connectivity (logo), and TE (logo) are trademarks. Other logos, product, and/or company names may be trademarks of their respective owners.

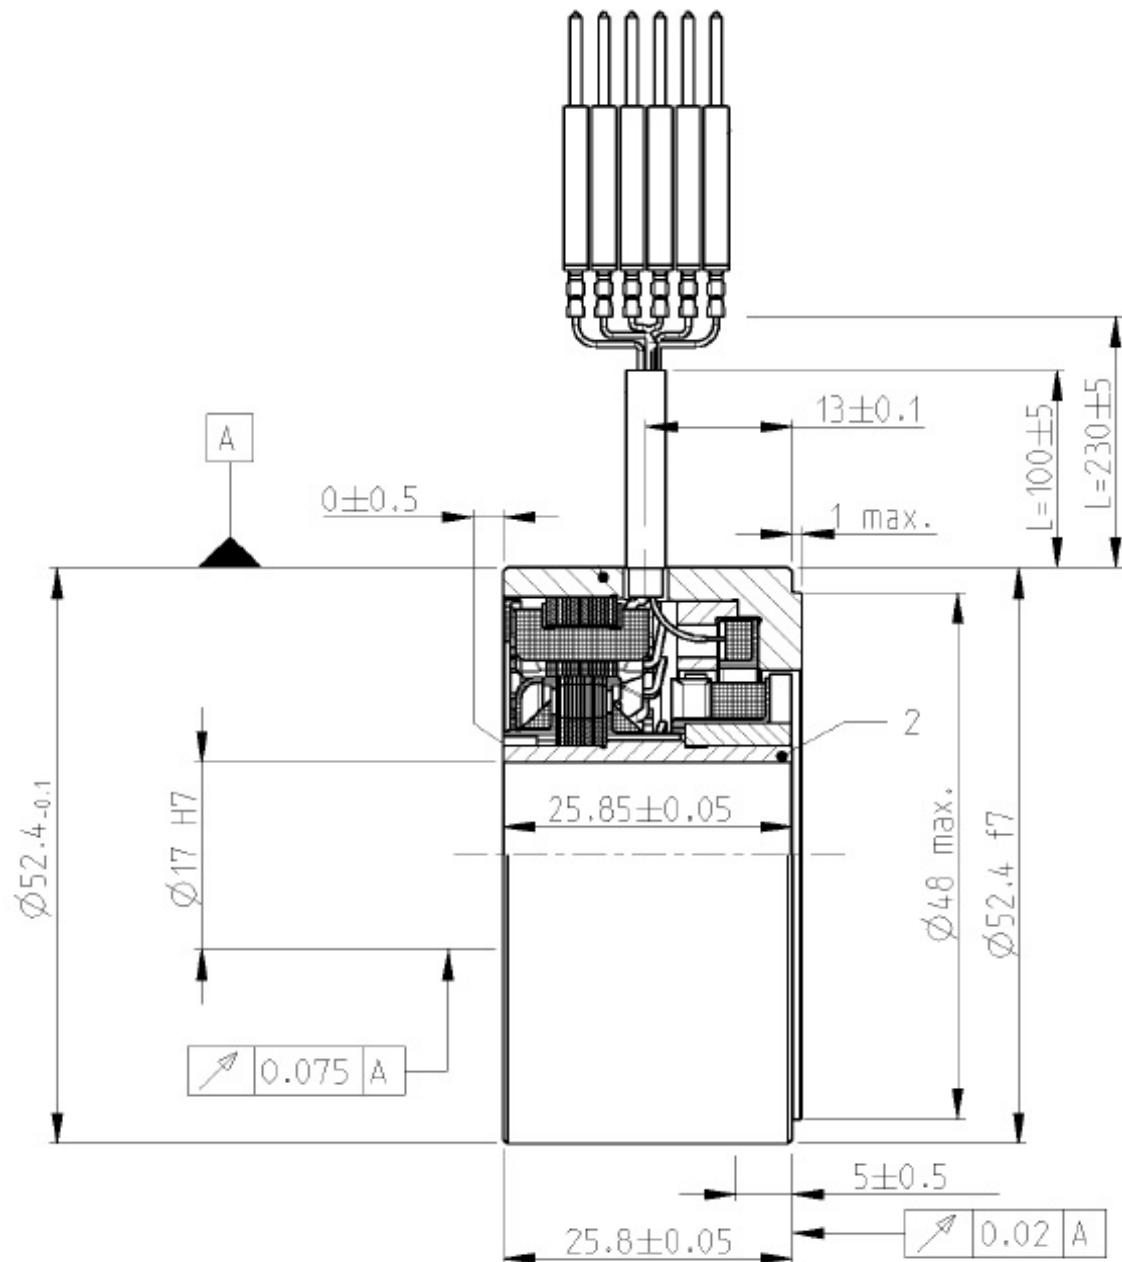

<u>DATE</u>	<u>PN REV.</u>	<u>DWN</u>	<u>APP</u>	<u>DS. REV</u>
2015-06-25	A	P. Lerchenfeld	D. Ondrej	1
2017-04-26	A	P. Lerchenfeld	D. Ondrej	2