

# LM185QML

*LM185QML Adjustable Micropower Voltage References*



Literature Number: SNVS386C

# LM185QML

## Adjustable Micropower Voltage References

### General Description

The LM185 are micropower 3-terminal adjustable band-gap voltage reference diodes. Operating from 1.24 to 5.3V and over a 10 $\mu$ A to 20mA current range, they feature exceptionally low dynamic impedance and good temperature stability. On-chip trimming is used to provide tight voltage tolerance. Since the LM185 band-gap reference uses only transistors and resistors, low noise and good long-term stability result.

Careful design of the LM185 has made the device tolerant of capacitive loading, making it easy to use in almost any reference application. The wide dynamic operating range allows its use with widely varying supplies with excellent regulation.

The extremely low power drain of the LM185 makes it useful for micropower circuitry. This voltage reference can be used

to make portable meters, regulators or general purpose analog circuitry with battery life approaching shelf life. Further, the wide operating current allows it to replace older references with a tighter tolerance part.

### Features


- Adjustable from 1.24V to 5.30V
- Operating current of 10 $\mu$ A to 20mA
- 1 $\Omega$  dynamic impedance
- Low temperature coefficient

### Ordering Information

NS Part Number	SMD Part Number	NS Package Number	Package Description
LM185BE/883		E20A	20LD Leadless Chip Carrier
LM185BH/883		H03H	3LD; TO-46 Metal Can
LM185BYH/883		H03H	3LD; TO-46 Metal Can
LM185BYH-SMD	5962-9091401MXA	H03H	3LD; TO-46 Metal Can
LM185BWG/883	5962-9091402QYA	WG10A	10LD Ceramic SOIC

### Connection Diagrams


TO-46  
Metal Can Package



20156301

Bottom View


20-Leadless Chip Carrier


+V<sub>REF</sub>

20156315

Top View


10-Lead Ceramic SOIC

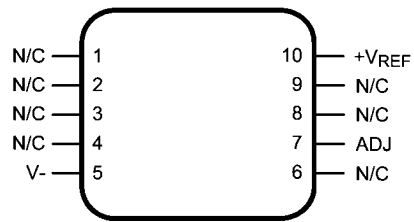

Top View


20156303

## Block Diagram



20156313

## Schematic Diagram

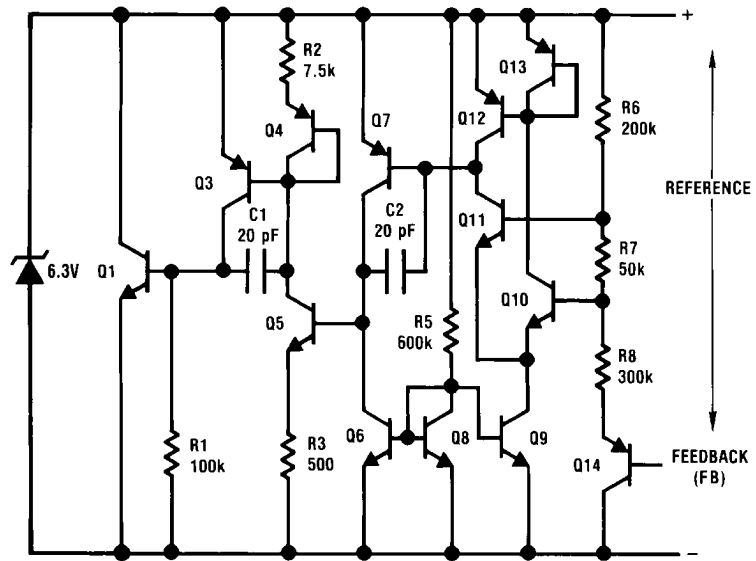

20156308

## Absolute Maximum Ratings (Note 1)

Reverse Current	30mA
Forward Current	10mA
Operating Temperature Range	$-55^{\circ}\text{C} \leq T_A \leq 125^{\circ}\text{C}$
Storage Temperature	$-55^{\circ}\text{C} \leq T_A \leq 150^{\circ}\text{C}$
Maximum Junction Temperature $T_{Jmax}$	150°C
Lead Temperature (soldering, 10 seconds)	300°C
Thermal Resistance	
$\theta_{JA}$	
LCC Package (Still Air)	100°C/W
LCC Package (500LF/Min Air flow)	73°C/W
Metal Can Package (Still Air)	300°C/W
Metal Can Package (500LF/Min Air flow)	139°C/W
Ceramic SOIC Package (Still Air)	194°C/W
Ceramic SOIC Package (500LF/Min Air flow)	128°C/W
$\theta_{JC}$	
LCC Package	25°C/W
Metal Can Package	57°C/W
Ceramic SOIC Package	23°C/W
Package Weight (Typical)	
LCC Package	TBD
Metal Can Package	TBD
Ceramic SOIC Package	210mg
ESD Tolerance (Note 2)	500V

## Quality Conformance Inspection

Mil-Std-883, Method 5005 - Group A

Subgroup	Description	Temp °C
1	Static tests at	25
2	Static tests at	125
3	Static tests at	-55
4	Dynamic tests at	25
5	Dynamic tests at	125
6	Dynamic tests at	-55
7	Functional tests at	25
8A	Functional tests at	125
8B	Functional tests at	-55
9	Switching tests at	25
10	Switching tests at	125
11	Switching tests at	-55
12	Settling time at	25
13	Settling time at	125
14	Settling time at	-55

## LM185B Electrical Characteristics

## DC Parameters

Symbol	Parameter	Conditions	Notes	Min	Max	Unit	Sub-groups
$V_{\text{Ref}}$	Reference Voltage	$I_R = 100\mu\text{A}$		1.228	1.252	V	1
				1.215	1.255	V	2, 3
		$I_R = 9\mu\text{A}$		1.228	1.252	V	1
		$I_R = 10\mu\text{A}$		1.215	1.255	V	2, 3
		$I_R = 1\text{mA}$		1.228	1.252	V	1
				1.215	1.255	V	2, 3
		$I_R = 20\text{mA}$		1.228	1.252	V	1
				1.215	1.255	V	2, 3
		$V_R = 5.3\text{V}, I_R = 100\mu\text{A}$		1.228	1.252	V	1
				1.215	1.255	V	2, 3
		$V_R = 5.3\text{V}, I_R = 45\mu\text{A}$		1.288	1.252	V	1
		$V_R = 5.3\text{V}, I_R = 50\mu\text{A}$		1.215	1.255	V	2, 3
		$V_R = 5.3\text{V}, I_R = 1.0\text{mA}$		1.288	1.252	V	1
				1.215	1.255	V	2, 3
		$V_R = 5.3\text{V}, I_R = 20\text{mA}$		1.288	1.252	V	1
				1.215	1.255	V	2, 3
$\Delta V_{\text{Ref}}/\Delta I_R$	Reference Voltage Change with Current	$9\mu\text{A} \leq I_R \leq 1\text{mA}$			1.0	mV	1
		$10\mu\text{A} \leq I_R \leq 1\text{mA}$			1.5	mV	2, 3
		$1\text{mA} \leq I_R \leq 20\text{mA}$			10	mV	1
					20	mV	2, 3
		$V_R = 5.3\text{V}, 45\mu\text{A} \leq I_R \leq 1\text{mA}$			1.0	mV	1
		$V_R = 5.3\text{V}, 50\mu\text{A} \leq I_R \leq 1\text{mA}$			1.5	mV	2, 3
		$V_R = 5.3\text{V}, 1\text{mA} \leq I_R \leq 20\text{mA}$			10	mV	1
$\Delta V_{\text{Ref}} / \Delta V_O$	Reference Voltage Change with Output Voltage	$V_R = 5.3\text{V}, I_R = 100\mu\text{A}$			3.0	mV	1
					6.0	mV	2, 3
$I_F$	Feedback Current	$I_R = 9\mu\text{A}$			20	nA	1
		$I_R = 10\mu\text{A}$			25	nA	2, 3
		$I_R = 20\text{mA}$			20	nA	1
					25	nA	2, 3
		$V_R = 5.3\text{V}, I_R = 45\mu\text{A}$			20	nA	1
		$V_R = 5.3\text{V}, I_R = 50\mu\text{A}$			25	nA	2, 3
		$V_R = 5.3\text{V}, I_R = 20\text{mA}$			20	nA	1
$I_C$	Minimum Operating Current	$V_R = V_{\text{Ref}}$	(Note 3)		9.0	$\mu\text{A}$	1
			(Note 3)		10	$\mu\text{A}$	2, 3
		$V_R = 5.3\text{V}$	(Note 3)		45	$\mu\text{A}$	1
			(Note 3)		50	$\mu\text{A}$	2, 3

## LM185BY Electrical Characteristics

## DC Parameters

Symbol	Parameter	Conditions	Notes	Min	Max	Unit	Sub-groups
$V_{\text{Ref}}$	Reference Voltage	$I_R = 100\mu\text{A}$		1.228	1.252	V	1
				1.215	1.255	V	2, 3
		$I_R = 9\mu\text{A}$		1.228	1.252	V	1
		$I_R = 10\mu\text{A}$		1.215	1.255	V	2, 3
		$I_R = 1\text{mA}$		1.228	1.252	V	1
				1.215	1.255	V	2, 3
		$I_R = 20\text{mA}$		1.228	1.252	V	1
				1.215	1.255	V	2, 3
		$V_R = 5.3\text{V}, I_R = 100\mu\text{A}$		1.228	1.252	V	1
				1.215	1.255	V	2, 3
		$V_R = 5.3\text{V}, I_R = 45\mu\text{A}$		1.288	1.252	V	1
		$V_R = 5.3\text{V}, I_R = 50\mu\text{A}$		1.215	1.255	V	2, 3
		$V_R = 5.3\text{V}, I_R = 1.0\text{mA}$		1.288	1.252	V	1
				1.215	1.255	V	2, 3
		$V_R = 5.3\text{V}, I_R = 20\text{mA}$		1.288	1.252	V	1
				1.215	1.255	V	2, 3
$\Delta V_{\text{Ref}} / \Delta I_R$	Reference Voltage Change with Current	$9\mu\text{A} \leq I_R \leq 1\text{mA}$			1.0	mV	1
		$10\mu\text{A} \leq I_R \leq 1\text{mA}$			1.5	mV	2, 3
		$1\text{mA} \leq I_R \leq 20\text{mA}$			10	mV	1
					20	mV	2, 3
		$V_R = 5.3\text{V}, 45\mu\text{A} \leq I_R \leq 1\text{mA}$			1.0	mV	1
		$V_R = 5.3\text{V}, 50\mu\text{A} \leq I_R \leq 1\text{mA}$			1.5	mV	2, 3
		$V_R = 5.3\text{V}, 1\text{mA} \leq I_R \leq 20\text{mA}$			10	mV	1
					20	mV	2, 3
$\Delta V_{\text{Ref}} / \Delta V_O$	Reference Voltage Change with Output Voltage	$V_R = 5.3\text{V}, I_R = 100\mu\text{A}$			3.0	mV	1
					6.0	mV	2, 3
$I_F$	Feedback Current	$I_R = 9\mu\text{A}$			20	nA	1
		$I_R = 10\mu\text{A}$			25	nA	2, 3
		$I_R = 20\text{mA}$			20	nA	1
					25	nA	2, 3
		$V_R = 5.3\text{V}, I_R = 45\mu\text{A}$			20	nA	1
		$V_R = 5.3\text{V}, I_R = 50\mu\text{A}$			25	nA	2, 3
		$V_R = 5.3\text{V}, I_R = 20\text{mA}$			20	nA	1
					25	nA	2, 3
$I_C$	Minimum Operating Current	$V_R = V_{\text{Ref}}$	(Note 3)		9.0	$\mu\text{A}$	1
			(Note 3)		10	$\mu\text{A}$	2, 3
		$V_R = 5.3\text{V}$	(Note 3)		45	$\mu\text{A}$	1
			(Note 3)		50	$\mu\text{A}$	2, 3
$T_C$	Temperature Coefficient		(Note 4)		50	PPM/ $^{\circ}\text{C}$	1, 2, 3


**Note 1:** Absolute Maximum Ratings indicate limits beyond which damage to the device may occur. Operating Ratings indicate conditions for which the device is functional, but do not guarantee specific performance limits. For guaranteed specifications and test conditions, see the Electrical Characteristics. The guaranteed specifications apply only for the test conditions listed. Some performance characteristics may degrade when the device is not operated under the listed test conditions.

**Note 2:** Human body model, 1.5 k $\Omega$  in series with 100 pF.


**Note 3:** Functional test.

**Note 4:** The average temperature coefficient is defined as the maximum deviation of reference voltage, at all measured temperatures between the operating  $T_{\text{Min}}$  &  $T_{\text{Max}}$ , divided by  $(T_{\text{Max}} - T_{\text{Min}})$ . The measured temperatures ( $T_{\text{Measured}}$ ) are  $-55^{\circ}\text{C}$ ,  $25^{\circ}\text{C}$ , &  $125^{\circ}\text{C}$  or  $\Delta V_{\text{Ref}} / (T_{\text{Max}} - T_{\text{Min}})$


## Typical Performance Characteristics

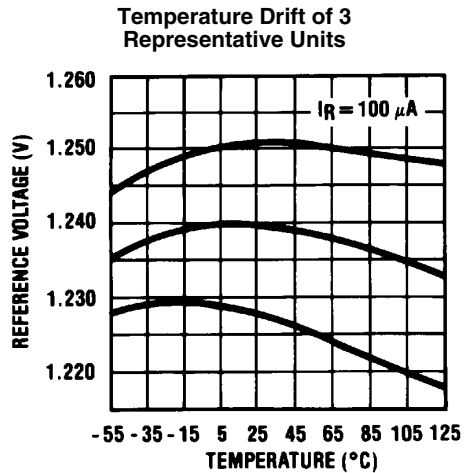


20156316

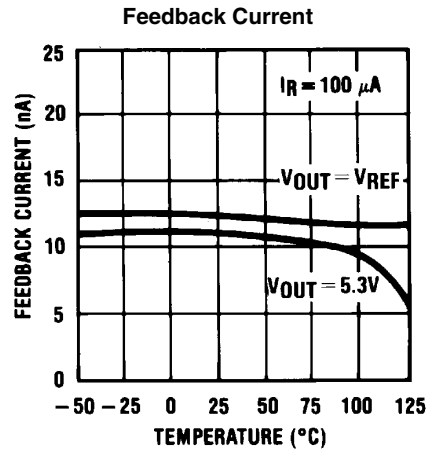


20156317

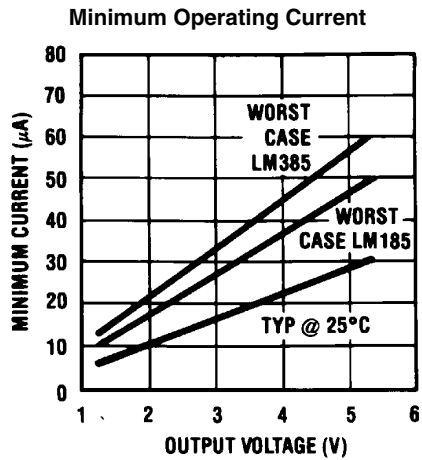


20156318

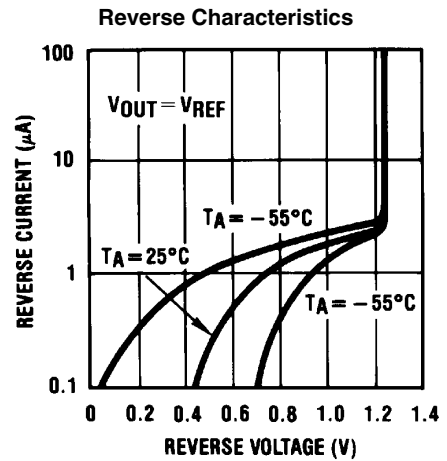

20156319

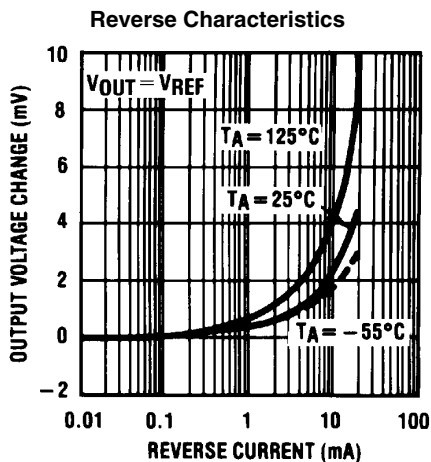


20156320

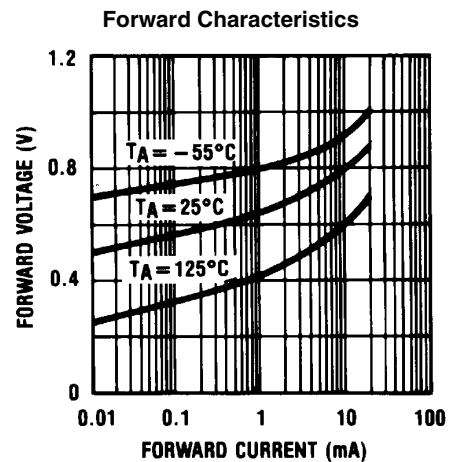


20156321

### Output Noise Voltage

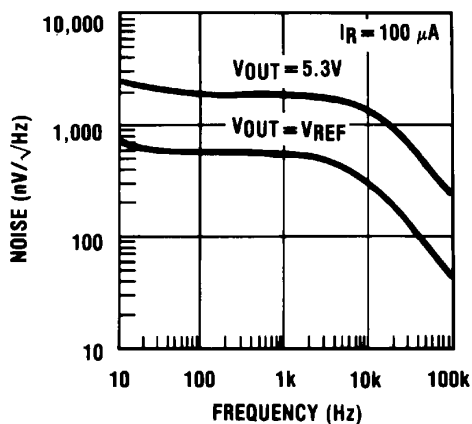


20156322

### Dynamic Output Impedance

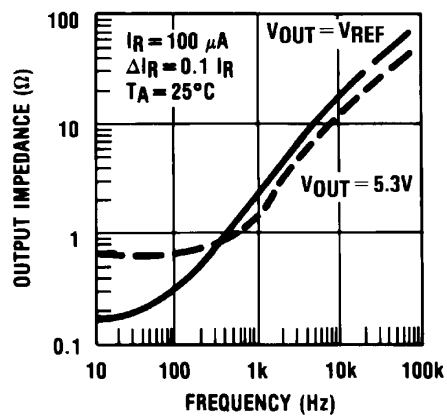


20156323

## Response Time

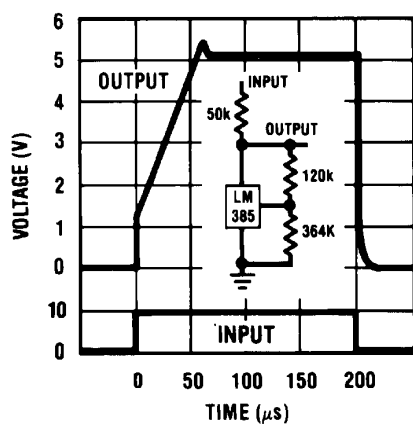


20156324

### Temperature Coefficient Typical LM185

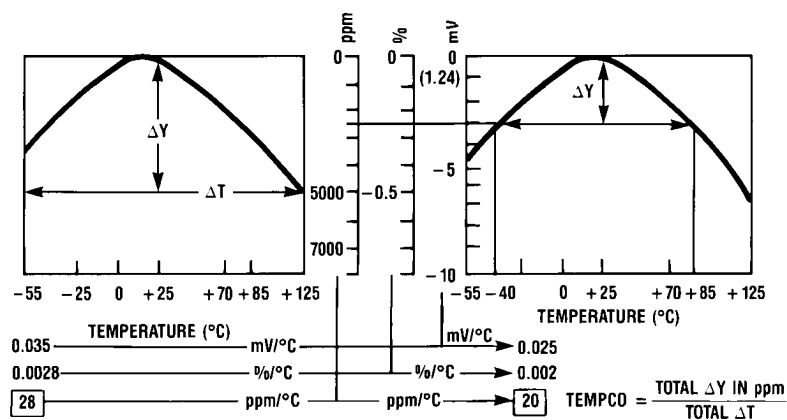


20156304

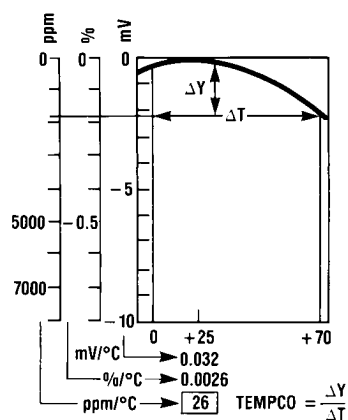




## Typical Applications

Precision 10V Reference

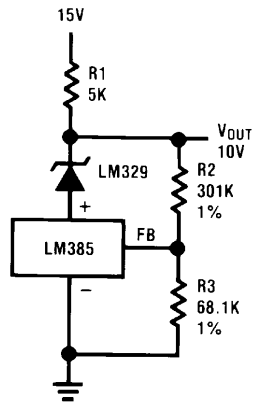


20156325

Low AC Noise Reference

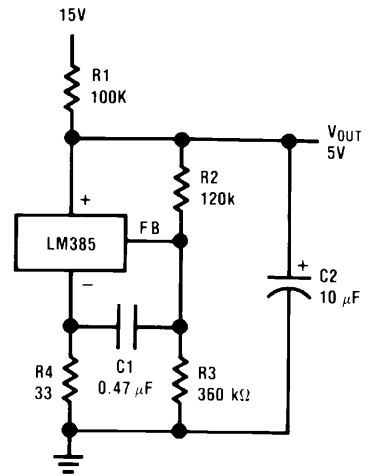


20156326

25V Low Current Shunt Regulator

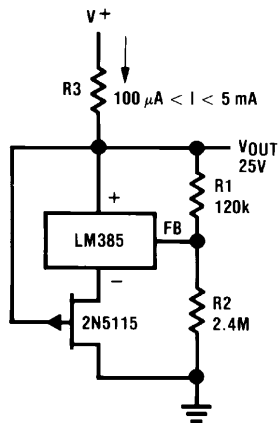


20156327

200 mA Shunt Regulator

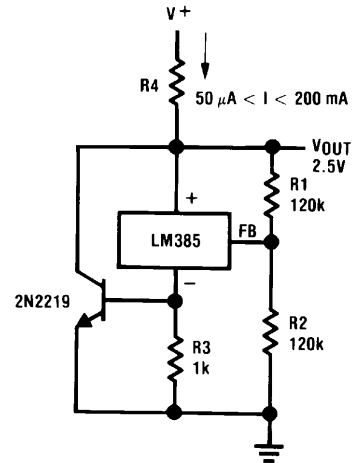


20156328

Series-Shunt 20 mA Regulator

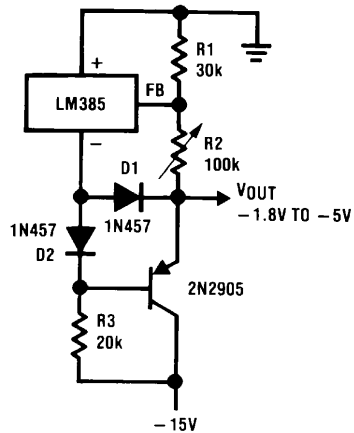


20156329

High Efficiency Low Power Regulator

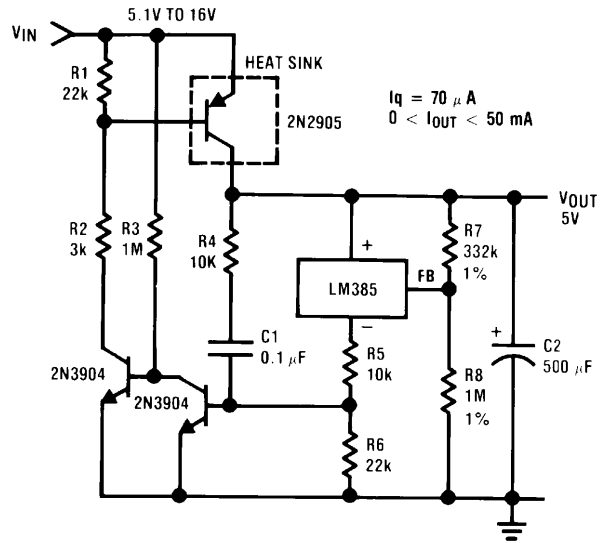


20156330

Voltage Level Detector




20156331


Voltage Level Detector



20156332

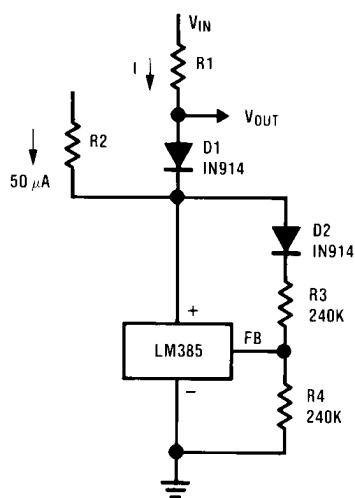
Fast Positive Clamp  
 $2.4V + \Delta V_{D1}$ 

20156333

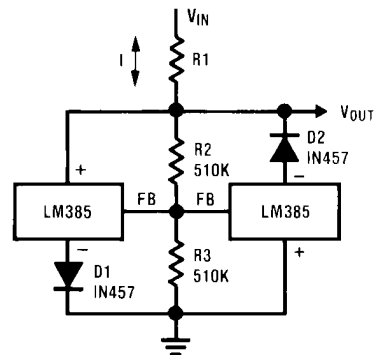Bidirectional Clamp  
 $\pm 2.4V$ 


20156334

**Bidirectional Adjustable Clamp**  
 $\pm 1.8V$  to  $\pm 2.4V$

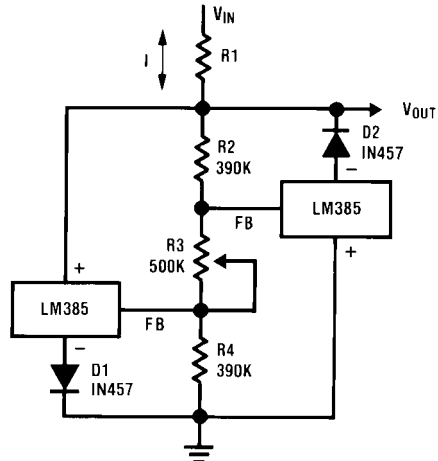


20156335

**Bidirectional Adjustable Clamp**  
 $\pm 2.4V$  to  $\pm 6V$

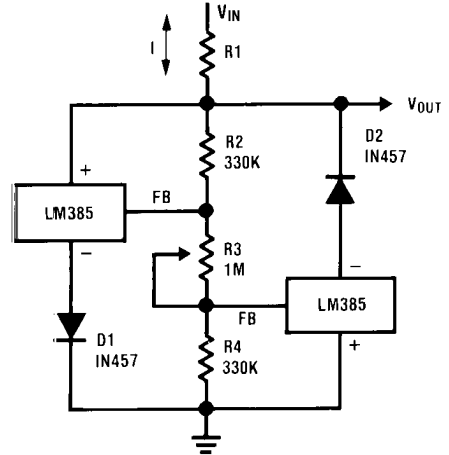


20156336

**Simple Floating Current Detector**

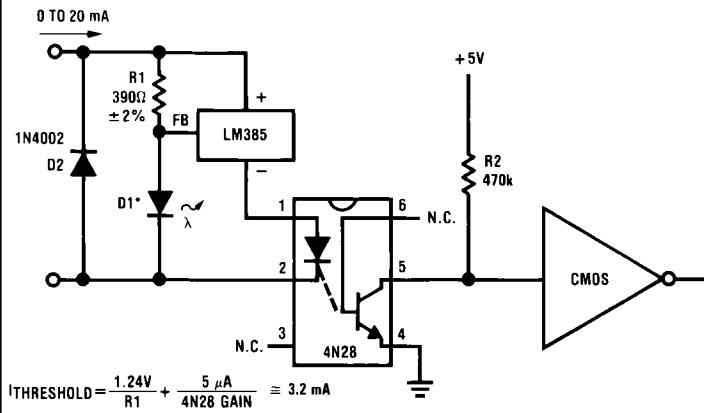


20156337

**Current Source**

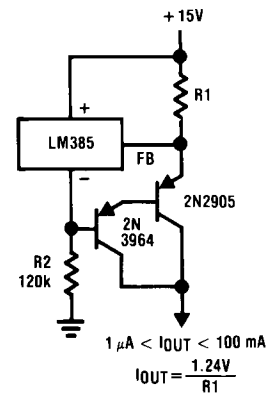

20156338


**Precision Floating Current Detector**

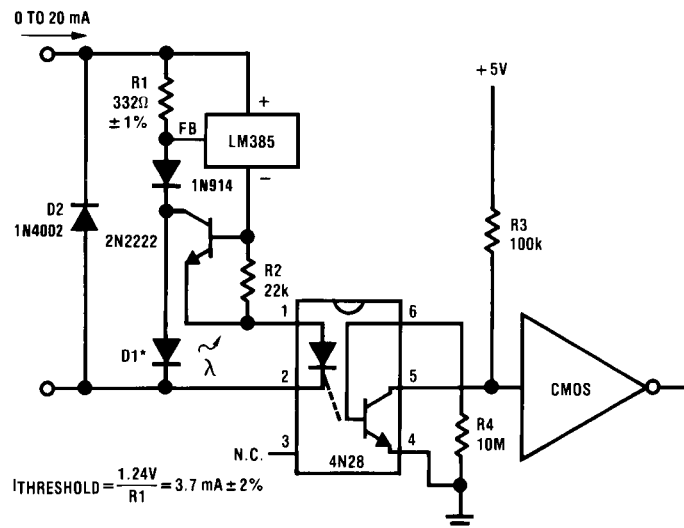

20156339


\*D1 can be any LED,  $V_F = 1.5V$  to  $2.2V$  at  $3 \text{ mA}$ . D1 may act as an indicator. D1 will be on if  $I_{THRESHOLD}$  falls below the threshold current, except with  $I=0$ .

Centigrade Thermometer, 10mV/°C

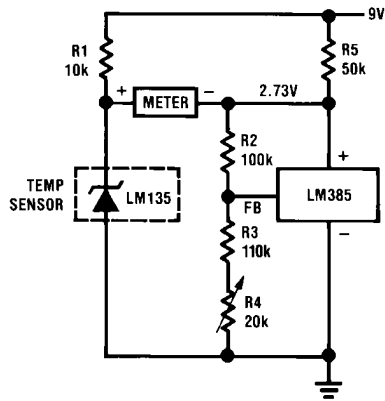


20156311

Freezer Alarm

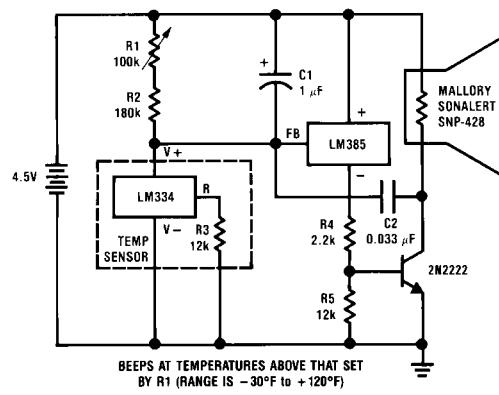BEEPS AT TEMPERATURES ABOVE THAT SET  
BY R1 (RANGE IS -30°F to +120°F)


20156312

1.2V Reference



20156314

5.0V Reference

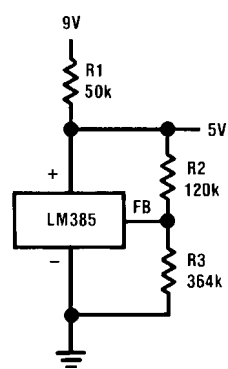


20156302

$$V_{OUT} = 1.24 \left( \frac{R3}{R2} + 1 \right)$$

## Revision History Section

Released	Revision	Section	Originator	Changes
11/08/05	A	New Release, Corporate format	L. Lytle	2 MDS data sheets converted into one Corp. data sheet format. MNLM185B-X Rev 0B0 and MNLM185BY-X Rev 0B0 will be archived.
04/06/06	B	Ordering Information Table, WG Connection Diagram, Absolute Maximum Ratings Section, Physical Dimensions Section	R. Malone	Added NSID, Connection Diagram, Physical Dimension Dwg, Thermal Resistance and Package Weight for WG package. Revision A will be Archived.
06/12/08	C	LM185B and LM185BY Electrical Section	Larry McGee	Correct IC test, $V_R = V_{REF}$ condition, subgroup 1, 2, 3 moved limits to the maximum column. Revision B will be Archived.


# Physical Dimensions inches (millimeters) unless otherwise noted

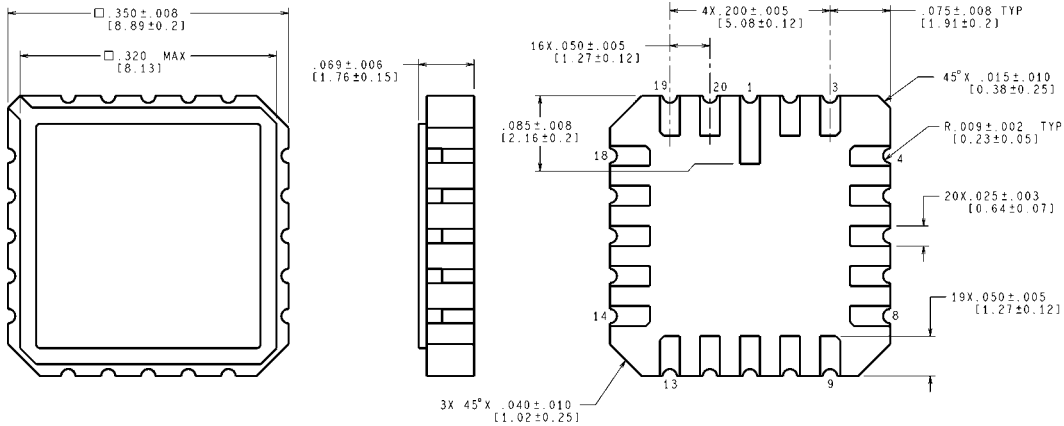

CONTROLLING DIMENSION IS INCH  
VALUES IN [ ] ARE MILLIMETERS

E20A (Rev F)





## 20-Leadless Chip Carrier (E) NS Package Number E20A

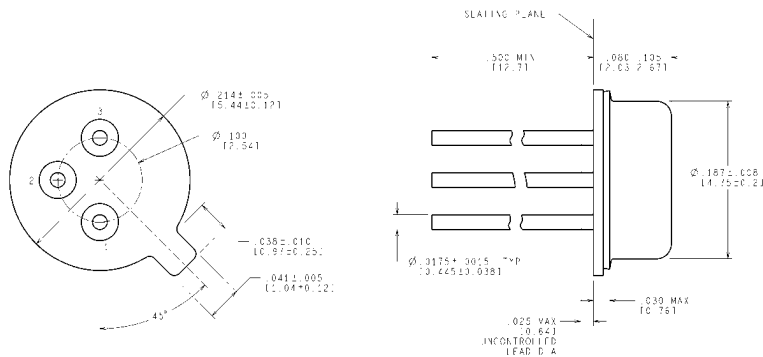

CONTROLLING DIMENSION IS INCH  
VALUES IN [ ] ARE IN MILLIMETERS

H03H (Rev F)

## TO-46 Metal Can Package (H) NS Package Number H03H

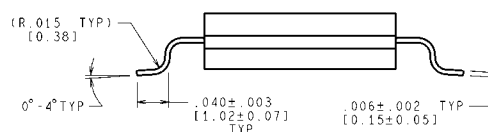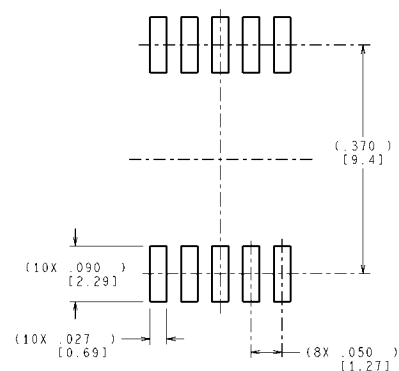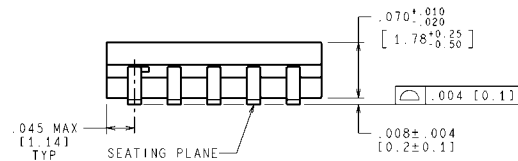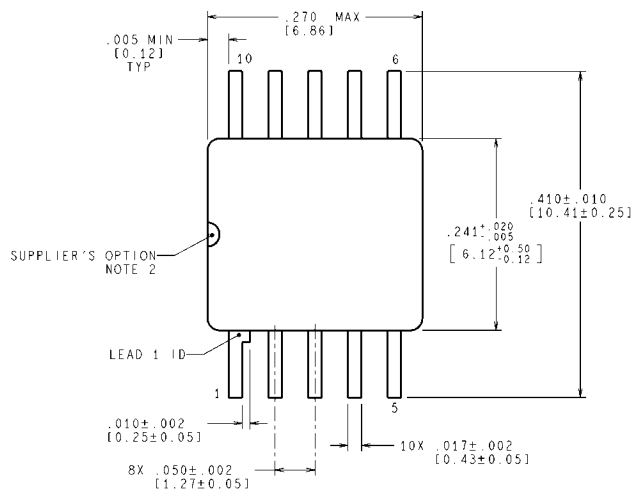

MIL-PRF-38535  
CONFIGURATION CONTROL

CONTROLLING DIMENSION IS INCH  
VALUES IN [ ] ARE MILLIMETERS  
DIMENSIONS IN ( ) FOR REFERENCE ONLY

**Ceramic SOIC Package (WG)**  
**NS Package Number WG10A**

WG10A (Rev E)

## Notes



## Notes

For more National Semiconductor product information and proven design tools, visit the following Web sites at:

Products		Design Support	
Amplifiers	<a href="http://www.national.com/amplifiers">www.national.com/amplifiers</a>	WEBENCH	<a href="http://www.national.com/webench">www.national.com/webench</a>
Audio	<a href="http://www.national.com/audio">www.national.com/audio</a>	Analog University	<a href="http://www.national.com/AU">www.national.com/AU</a>
Clock Conditioners	<a href="http://www.national.com/timing">www.national.com/timing</a>	App Notes	<a href="http://www.national.com/appnotes">www.national.com/appnotes</a>
Data Converters	<a href="http://www.national.com/adac">www.national.com/adac</a>	Distributors	<a href="http://www.national.com/contacts">www.national.com/contacts</a>
Displays	<a href="http://www.national.com/displays">www.national.com/displays</a>	Green Compliance	<a href="http://www.national.com/quality/green">www.national.com/quality/green</a>
Ethernet	<a href="http://www.national.com/ethernet">www.national.com/ethernet</a>	Packaging	<a href="http://www.national.com/packaging">www.national.com/packaging</a>
Interface	<a href="http://www.national.com/interface">www.national.com/interface</a>	Quality and Reliability	<a href="http://www.national.com/quality">www.national.com/quality</a>
LVDS	<a href="http://www.national.com/lvds">www.national.com/lvds</a>	Reference Designs	<a href="http://www.national.com/refdesigns">www.national.com/refdesigns</a>
Power Management	<a href="http://www.national.com/power">www.national.com/power</a>	Feedback	<a href="http://www.national.com/feedback">www.national.com/feedback</a>
Switching Regulators	<a href="http://www.national.com/switchers">www.national.com/switchers</a>		
LDOs	<a href="http://www.national.com/lldo">www.national.com/lldo</a>		
LED Lighting	<a href="http://www.national.com/led">www.national.com/led</a>		
PowerWise	<a href="http://www.national.com/powerwise">www.national.com/powerwise</a>		
Serial Digital Interface (SDI)	<a href="http://www.national.com/sdi">www.national.com/sdi</a>		
Temperature Sensors	<a href="http://www.national.com/tempsensors">www.national.com/tempsensors</a>		
Wireless (PLL/VCO)	<a href="http://www.national.com/wireless">www.national.com/wireless</a>		

THE CONTENTS OF THIS DOCUMENT ARE PROVIDED IN CONNECTION WITH NATIONAL SEMICONDUCTOR CORPORATION ("NATIONAL") PRODUCTS. NATIONAL MAKES NO REPRESENTATIONS OR WARRANTIES WITH RESPECT TO THE ACCURACY OR COMPLETENESS OF THE CONTENTS OF THIS PUBLICATION AND RESERVES THE RIGHT TO MAKE CHANGES TO SPECIFICATIONS AND PRODUCT DESCRIPTIONS AT ANY TIME WITHOUT NOTICE. NO LICENSE, WHETHER EXPRESS, IMPLIED, ARISING BY ESTOPPEL OR OTHERWISE, TO ANY INTELLECTUAL PROPERTY RIGHTS IS GRANTED BY THIS DOCUMENT.

TESTING AND OTHER QUALITY CONTROLS ARE USED TO THE EXTENT NATIONAL DEEMS NECESSARY TO SUPPORT NATIONAL'S PRODUCT WARRANTY. EXCEPT WHERE MANDATED BY GOVERNMENT REQUIREMENTS, TESTING OF ALL PARAMETERS OF EACH PRODUCT IS NOT NECESSARILY PERFORMED. NATIONAL ASSUMES NO LIABILITY FOR APPLICATIONS ASSISTANCE OR BUYER PRODUCT DESIGN. BUYERS ARE RESPONSIBLE FOR THEIR PRODUCTS AND APPLICATIONS USING NATIONAL COMPONENTS. PRIOR TO USING OR DISTRIBUTING ANY PRODUCTS THAT INCLUDE NATIONAL COMPONENTS, BUYERS SHOULD PROVIDE ADEQUATE DESIGN, TESTING AND OPERATING SAFEGUARDS.

EXCEPT AS PROVIDED IN NATIONAL'S TERMS AND CONDITIONS OF SALE FOR SUCH PRODUCTS, NATIONAL ASSUMES NO LIABILITY WHATSOEVER, AND NATIONAL DISCLAIMS ANY EXPRESS OR IMPLIED WARRANTY RELATING TO THE SALE AND/OR USE OF NATIONAL PRODUCTS INCLUDING LIABILITY OR WARRANTIES RELATING TO FITNESS FOR A PARTICULAR PURPOSE, MERCHANTABILITY, OR INFRINGEMENT OF ANY PATENT, COPYRIGHT OR OTHER INTELLECTUAL PROPERTY RIGHT.

### LIFE SUPPORT POLICY

**NATIONAL'S PRODUCTS ARE NOT AUTHORIZED FOR USE AS CRITICAL COMPONENTS IN LIFE SUPPORT DEVICES OR SYSTEMS WITHOUT THE EXPRESS PRIOR WRITTEN APPROVAL OF THE CHIEF EXECUTIVE OFFICER AND GENERAL COUNSEL OF NATIONAL SEMICONDUCTOR CORPORATION.** As used herein:

Life support devices or systems are devices which (a) are intended for surgical implant into the body, or (b) support or sustain life and whose failure to perform when properly used in accordance with instructions for use provided in the labeling can be reasonably expected to result in a significant injury to the user. A critical component is any component in a life support device or system whose failure to perform can be reasonably expected to cause the failure of the life support device or system or to affect its safety or effectiveness.

National Semiconductor and the National Semiconductor logo are registered trademarks of National Semiconductor Corporation. All other brand or product names may be trademarks or registered trademarks of their respective holders.

Copyright© 2008 National Semiconductor Corporation

For the most current product information visit us at [www.national.com](http://www.national.com)



**National Semiconductor  
Americas Technical  
Support Center**  
Email: [support@nsc.com](mailto:support@nsc.com)  
Tel: 1-800-272-9959

**National Semiconductor Europe  
Technical Support Center**  
Email: [europe.support@nsc.com](mailto:europe.support@nsc.com)  
German Tel: +49 (0) 180 5010 771  
English Tel: +44 (0) 870 850 4288

**National Semiconductor Asia  
Pacific Technical Support Center**  
Email: [ap.support@nsc.com](mailto:ap.support@nsc.com)

**National Semiconductor Japan  
Technical Support Center**  
Email: [jpn.feedback@nsc.com](mailto:jpn.feedback@nsc.com)

## IMPORTANT NOTICE

Texas Instruments Incorporated and its subsidiaries (TI) reserve the right to make corrections, modifications, enhancements, improvements, and other changes to its products and services at any time and to discontinue any product or service without notice. Customers should obtain the latest relevant information before placing orders and should verify that such information is current and complete. All products are sold subject to TI's terms and conditions of sale supplied at the time of order acknowledgment.

TI warrants performance of its hardware products to the specifications applicable at the time of sale in accordance with TI's standard warranty. Testing and other quality control techniques are used to the extent TI deems necessary to support this warranty. Except where mandated by government requirements, testing of all parameters of each product is not necessarily performed.

TI assumes no liability for applications assistance or customer product design. Customers are responsible for their products and applications using TI components. To minimize the risks associated with customer products and applications, customers should provide adequate design and operating safeguards.

TI does not warrant or represent that any license, either express or implied, is granted under any TI patent right, copyright, mask work right, or other TI intellectual property right relating to any combination, machine, or process in which TI products or services are used. Information published by TI regarding third-party products or services does not constitute a license from TI to use such products or services or a warranty or endorsement thereof. Use of such information may require a license from a third party under the patents or other intellectual property of the third party, or a license from TI under the patents or other intellectual property of TI.

Reproduction of TI information in TI data books or data sheets is permissible only if reproduction is without alteration and is accompanied by all associated warranties, conditions, limitations, and notices. Reproduction of this information with alteration is an unfair and deceptive business practice. TI is not responsible or liable for such altered documentation. Information of third parties may be subject to additional restrictions.

Resale of TI products or services with statements different from or beyond the parameters stated by TI for that product or service voids all express and any implied warranties for the associated TI product or service and is an unfair and deceptive business practice. TI is not responsible or liable for any such statements.

TI products are not authorized for use in safety-critical applications (such as life support) where a failure of the TI product would reasonably be expected to cause severe personal injury or death, unless officers of the parties have executed an agreement specifically governing such use. Buyers represent that they have all necessary expertise in the safety and regulatory ramifications of their applications, and acknowledge and agree that they are solely responsible for all legal, regulatory and safety-related requirements concerning their products and any use of TI products in such safety-critical applications, notwithstanding any applications-related information or support that may be provided by TI. Further, Buyers must fully indemnify TI and its representatives against any damages arising out of the use of TI products in such safety-critical applications.

TI products are neither designed nor intended for use in military/aerospace applications or environments unless the TI products are specifically designated by TI as military-grade or "enhanced plastic." Only products designated by TI as military-grade meet military specifications. Buyers acknowledge and agree that any such use of TI products which TI has not designated as military-grade is solely at the Buyer's risk, and that they are solely responsible for compliance with all legal and regulatory requirements in connection with such use.

TI products are neither designed nor intended for use in automotive applications or environments unless the specific TI products are designated by TI as compliant with ISO/TS 16949 requirements. Buyers acknowledge and agree that, if they use any non-designated products in automotive applications, TI will not be responsible for any failure to meet such requirements.

Following are URLs where you can obtain information on other Texas Instruments products and application solutions:

### Products

Audio	<a href="http://www.ti.com/audio">www.ti.com/audio</a>
Amplifiers	<a href="http://amplifier.ti.com">amplifier.ti.com</a>
Data Converters	<a href="http://dataconverter.ti.com">dataconverter.ti.com</a>
DLP® Products	<a href="http://www.dlp.com">www.dlp.com</a>
DSP	<a href="http://dsp.ti.com">dsp.ti.com</a>
Clocks and Timers	<a href="http://www.ti.com/clocks">www.ti.com/clocks</a>
Interface	<a href="http://interface.ti.com">interface.ti.com</a>
Logic	<a href="http://logic.ti.com">logic.ti.com</a>
Power Mgmt	<a href="http://power.ti.com">power.ti.com</a>
Microcontrollers	<a href="http://microcontroller.ti.com">microcontroller.ti.com</a>
RFID	<a href="http://www.ti-rfid.com">www.ti-rfid.com</a>
OMAP Mobile Processors	<a href="http://www.ti.com/omap">www.ti.com/omap</a>
Wireless Connectivity	<a href="http://www.ti.com/wirelessconnectivity">www.ti.com/wirelessconnectivity</a>

### Applications

Communications and Telecom	<a href="http://www.ti.com/communications">www.ti.com/communications</a>
Computers and Peripherals	<a href="http://www.ti.com/computers">www.ti.com/computers</a>
Consumer Electronics	<a href="http://www.ti.com/consumer-apps">www.ti.com/consumer-apps</a>
Energy and Lighting	<a href="http://www.ti.com/energy">www.ti.com/energy</a>
Industrial	<a href="http://www.ti.com/industrial">www.ti.com/industrial</a>
Medical	<a href="http://www.ti.com/medical">www.ti.com/medical</a>
Security	<a href="http://www.ti.com/security">www.ti.com/security</a>
Space, Avionics and Defense	<a href="http://www.ti.com/space-avionics-defense">www.ti.com/space-avionics-defense</a>
Transportation and Automotive	<a href="http://www.ti.com/automotive">www.ti.com/automotive</a>
Video and Imaging	<a href="http://www.ti.com/video">www.ti.com/video</a>

TI E2E Community Home Page

[e2e.ti.com](http://e2e.ti.com)

Mailing Address: Texas Instruments, Post Office Box 655303, Dallas, Texas 75265  
Copyright © 2011, Texas Instruments Incorporated