


## Description

The TS5A3159 is a single-pole double-throw (SPDT) analog switch that is designed to operate from 1.65 V to 5.5 V. The device offers a low ON-state resistance and an excellent ON-resistance, matching with the break-before-make feature to prevent signal distortion during the transferring of a signal from one channel to another. The device has an excellent total harmonic distortion (THD) performance and consumes very low power. These features make this device suitable for portable audio applications.

## Applications

- Cell Phones
- PDAs
- Portable Instrumentation

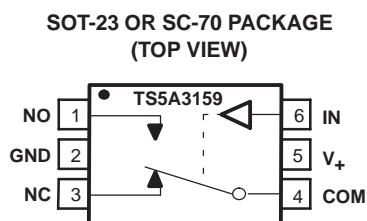

FUNCTION TABLE

| IN | NC TO COM,<br>COM TO NC | NO TO COM,<br>COM TO NO |
|----|-------------------------|-------------------------|
| L  | ON                      | OFF                     |
| H  | OFF                     | ON                      |

## Features

- Specified Break-Before-Make Switching
- Low ON-State Resistance (1 Ω)
- Control Inputs Are 5-V Tolerant
- Low Charge Injection
- Excellent ON-Resistance Matching
- Low Total Harmonic Distortion
- 1.65-V to 5.5-V Single-Supply Operation
- Latch-Up Performance Exceeds 100 mA Per JESD 78, Class II
- ESD Performance Tested Per JESD 22
  - 2000-V Human-Body Model (A114-B, Class II)
  - 1000-V Charged-Device Model (C101)

## Summary of Characteristics

$V_+ = 5\text{ V}$  and  $T_A = 25\text{ }^\circ\text{C}$

| Configuration                                   | 2:1 Multiplexer/<br>Demultiplexer<br>(1 × SPDT) |
|---|---|
| Number of channels                              | 1   |
| ON-state resistance ( $r_{ON}$ )                | 1.1 Ω   |
| ON-state resistance match ( $\Delta r_{ON}$ )   | 0.1 Ω   |
| ON-state resistance flatness ( $r_{ON(flat)}$ ) | 0.15 Ω  |
| Turn on/turn off time ( $t_{ON}/t_{OFF}$ )      | 20 ns/15 ns                                     |
| Break-before-make time ( $t_{BBM}$ )            | 12 ns   |
| Charge injection ( $Q_C$ )                      | 36 pC   |
| Bandwidth (BW)                                  | 100 MHz   |
| OFF isolation ( $O_{ISO}$ )                     | –65 dB at 1 MHz                                 |
| Crosstalk ( $X_{TALK}$ )                        | –65 dB at 1 MHz                                 |
| Total harmonic distortion (THD)                 | 0.01%   |
| Leakage current ( $I_{NO(OFF)}/I_{NC(OFF)}$ )   | ±20 nA  |
| Package option                                  | 6-pin DBV or DCK                                |



Please be aware that an important notice concerning availability, standard warranty, and use in critical applications of Texas Instruments semiconductor products and disclaimers thereto appears at the end of this data sheet.

# TS5A3159

## 1-Ω SPDT ANALOG SWITCH

SCDS174B – AUGUST 2004 – REVISED MAY 2005

### ORDERING INFORMATION

| T <sub>A</sub> | PACKAGE <sup>(1)</sup>           |               | ORDERABLE PART NUMBER | TOP-SIDE MARKING <sup>(2)</sup> |
|----------------|----------------------------------|---------------|-----------------------|---------------------------------|
| –40°C to 85°C  | SOT (SOT-23) – DBV               | Tape and reel | TS5A3159DBVR          | JA8_                            |
|                | SOT (SC-70) – DCK <sup>(2)</sup> | Tape and reel | TS5A3159DCKR          | JA_                             |

(1) Package drawings, standard packing quantities, thermal data, symbolization, and PCB design guidelines are available at [www.ti.com/sc/package](http://www.ti.com/sc/package).

(2) DBV/DCK: The actual top-side marking has one additional character that designates the assembly/test site.

### Absolute Maximum Ratings<sup>(1)</sup>

over operating free-air temperature range (unless otherwise noted)

|                                    |  | MIN   | MAX                  | UNIT    |
|------------------------------------|--|---|----------------------|---------|
| V <sub>+</sub>                     | Supply voltage range <sup>(2)</sup>              | –0.5  | 6.5                  | V       |
| V <sub>NO</sub> , V <sub>COM</sub> | Analog voltage range <sup>(2)(3)(4)</sup>        | –0.5  | V <sub>+</sub> + 0.5 | V       |
| I <sub>I/OK</sub>                  | Analog port diode current                        | V <sub>NO</sub> , V <sub>COM</sub> < 0 or V <sub>NO</sub> , V <sub>COM</sub> > V <sub>+</sub> |                      | ±50 mA  |
| I <sub>NO</sub> , I <sub>COM</sub> | ON–state switch current                          | V <sub>NO</sub> , V <sub>COM</sub> = 0 to V <sub>+</sub>                                      |                      | ±200 mA |
|                                    | ON–state peak switch current <sup>(5)</sup>      |   |                      | ±400 mA |
| V <sub>IN</sub>                    | Digital input voltage range <sup>(2)(3)</sup>    | –0.5  | 6.5                  | V       |
| I <sub>IK</sub>                    | Digital input clamp current                      | V <sub>IN</sub> < 0   |                      | –50 mA  |
|                                    | Continuous current through V <sub>+</sub> or GND |   |                      | ±100 mA |
| θ <sub>JA</sub>                    | Package thermal impedance <sup>(6)</sup>         |   |                      | 165 °C  |
| T <sub>stg</sub>                   | Storage temperature range                        | –65   | 150                  | °C      |

(1) Stresses beyond those listed under “absolute maximum ratings” may cause permanent damage to the device. These are stress ratings only, and functional operation of the device at these or any other conditions beyond those indicated under “recommended operating conditions” is not implied. Exposure to absolute-maximum-rated conditions for extended periods may affect device reliability.

(2) All voltages are with respect to ground, unless otherwise specified.

(3) The input and output voltage ratings may be exceeded if the input and output clamp-current ratings are observed.

(4) This value is limited to 5.5 V maximum.

(5) Pulse at 1 ms duration < 10% duty cycle.

(6) The package thermal impedance is calculated in accordance with JESD 51-7.

**Electrical Characteristics for 5-V Supply**
 $V_+ = 4.5\text{ V to }5.5\text{ V}$  and  $T_A = -40^\circ\text{C to }85^\circ\text{C}$  (unless otherwise noted)

| PARAMETER                                  | SYMBOL  | TEST CONDITIONS   |                              | T <sub>A</sub> | V <sub>+</sub> | MIN TYP(1) MAX |                | UNIT |
|--|---|---|------------------------------|----------------|----------------|----------------|----------------|------|
| Analog Switch                              |   |   |                              |                |                |                |                |      |
| Analog signal range                        | V <sub>COM</sub> ,<br>V <sub>NO</sub> , V <sub>NC</sub> |   |                              |                |                | 0              | V <sub>+</sub> | V    |
| Peak ON resistance                         | r <sub>peak</sub>                                       | 0 ≤ V <sub>NO</sub> or V <sub>NC</sub> ≤ V <sub>+</sub> ,<br>I <sub>COM</sub> = −30 mA, | Switch ON,<br>See Figure 11  | 25°C<br>Full   | 4.5 V          | 1              | 1.5            | Ω    |
| ON-state resistance                        | r <sub>on</sub>   | V <sub>NO</sub> or V <sub>NC</sub> = 2.5 V,<br>I <sub>COM</sub> = −30 mA,               | Switch ON,<br>See Figure 11  | 25°C<br>Full   | 4.5 V          | 0.75           | 1.1            | Ω    |
| ON-state resistance match between channels | Δr <sub>on</sub>  | V <sub>NO</sub> or V <sub>NC</sub> = 2.5 V,<br>I <sub>COM</sub> = −30 mA,               | Switch ON,<br>See Figure 11  | 25°C           | 4.5 V          | 0.1            |                | Ω    |
| ON-state resistance flatness               | r <sub>on(flat)</sub>                                   | 0 ≤ V <sub>NO</sub> or V <sub>NC</sub> ≤ V <sub>+</sub> ,<br>I <sub>COM</sub> = −30 mA, | Switch ON,<br>See Figure 11  | 25°C           | 4.5 V          | 0.233          |                | Ω    |
|  |   | V <sub>NO</sub> or V <sub>NC</sub> = 1 V, 1.5 V, 2.5 V,<br>I <sub>COM</sub> = −30 mA,   |                              | 25°C           |                | 0.15           |                |      |
| NC, NO OFF leakage current                 | I <sub>NC(OFF)</sub> ,<br>I <sub>NO(OFF)</sub>          | V <sub>NC</sub> or V <sub>NO</sub> = 4.5 V,<br>V <sub>COM</sub> = 0,                    | Switch OFF,<br>See Figure 12 | 25°C<br>Full   | 5.5 V          | −2             | 0.2 2          | nA   |
| NC, NO ON leakage current                  | I <sub>NC(ON)</sub> ,<br>I <sub>NO(ON)</sub>            | V <sub>NC</sub> or V <sub>NO</sub> = 4.5 V,<br>V <sub>COM</sub> = Open,                 | Switch ON,<br>See Figure 13  | 25°C<br>Full   | 5.5 V          | −4             | 2.8 4          | nA   |
| COM ON leakage current                     | I <sub>COM(ON)</sub>                                    | V <sub>NC</sub> or V <sub>NO</sub> = 4.5 V or Open,<br>V <sub>COM</sub> = 4.5 V,        | Switch ON,<br>See Figure 13  | 25°C<br>Full   | 5.5 V          | −4             | 0.47 4         | nA   |
| Digital Inputs (IN)                        |   |   |                              |                |                |                |                |      |
| Input logic high                           | V <sub>IH</sub>   |   |                              | Full           |                | 2.4            | 5.5            | V    |
| Input logic low                            | V <sub>IL</sub>   |   |                              | Full           |                | 0              | 0.8            | V    |
| Input leakage current                      | I <sub>IH</sub> , I <sub>IL</sub>                       | V <sub>IN</sub> = 5.5 V or 0  |                              | Full           | 5.5 V          | −1             | 1              | μA   |

(1)  $T_A = 25^\circ\text{C}$

# TS5A3159

## 1-Ω SPDT ANALOG SWITCH

SCDS174B – AUGUST 2004 – REVISED MAY 2005

### Electrical Characteristics for 5-V Supply (continued)

$V_+ = 4.5\text{ V to }5.5\text{ V}$  and  $T_A = -40^\circ\text{C to }85^\circ\text{C}$  (unless otherwise noted)

| PARAMETER                    | SYMBOL   | TEST CONDITIONS  |  | T <sub>A</sub> | V <sub>+</sub>    | MIN  | TYP(1) | MAX  | UNIT |
|------------------------------|--|--|--|----------------|-------------------|------|--------|------|------|
| Dynamic                      |  |  |  |                |                   |      |        |      |      |
| Turn-on time                 | t <sub>ON</sub>                                | V <sub>COM</sub> = V <sub>+</sub> ,<br>R <sub>L</sub> = 50 Ω,                    | C <sub>L</sub> = 35 pF,<br>See Figure 15 | 25°C           | 4.5 V to<br>5.5 V | 20   | 35     |      | ns   |
|                              |  |  |  | Full           |                   | 40   |        |      |      |
| Turn-off time                | t <sub>OFF</sub>                               | V <sub>COM</sub> = V <sub>+</sub> ,<br>R <sub>L</sub> = 50 Ω,                    | C <sub>L</sub> = 35 pF,<br>See Figure 15 | 25°C           | 4.5 V to<br>5.5 V | 15   | 20     |      | ns   |
|                              |  |  |  | Full           |                   | 35   |        |      |      |
| Break-before-make<br>time    | t <sub>BBM</sub>                               | V <sub>NC</sub> = V <sub>NO</sub> = V <sub>+</sub> /2,<br>R <sub>L</sub> = 50 Ω, | C <sub>L</sub> = 35 pF,<br>See Figure 16 | 25°C           | 4.5 V to<br>5.5 V | 1    | 12     | 14.5 | ns   |
|                              |  |  |  | Full           |                   | 1    |        |      |      |
| Charge injection             | Q <sub>C</sub>                                 | C <sub>L</sub> = 1 nF, V <sub>GEN</sub> = 0 V,                                   | See Figure 20                            | 25°C           | 5 V               | 36   |        |      | pC   |
| NC, NO<br>OFF capacitance    | C <sub>NC(OFF)</sub> ,<br>C <sub>NO(OFF)</sub> | V <sub>NC</sub> or V <sub>NO</sub> = V <sub>+</sub> or GND,<br>Switch OFF,       | See Figure 14                            | 25°C           | 5 V               | 23   |        |      | pF   |
| NC, NO<br>ON capacitance     | C <sub>NC(ON)</sub> ,<br>C <sub>NO(ON)</sub>   | V <sub>NC</sub> or V <sub>NO</sub> = V <sub>+</sub> or GND,<br>Switch ON,        | See Figure 14                            | 25°C           | 5 V               | 84   |        |      | pF   |
| COM<br>ON capacitance        | C <sub>COM(ON)</sub>                           | V <sub>COM</sub> = V <sub>+</sub> or GND,<br>Switch ON,                          | See Figure 14                            | 25°C           | 5 V               | 84   |        |      | pF   |
| Digital input<br>capacitance | C <sub>IN</sub>                                | V <sub>IN</sub> = V <sub>+</sub> or GND,   | See Figure 14                            | 25°C           | 5 V               | 2.1  |        |      | pF   |
| Bandwidth                    | BW   | R <sub>L</sub> = 50 Ω,<br>Switch ON,   | See Figure 17                            | 25°C           | 5 V               | 100  |        |      | MHz  |
| OFF isolation                | O <sub>ISO</sub>                               | R <sub>L</sub> = 50 Ω,<br>f = 1 MHz,   | Switch OFF,<br>See Figure 18             | 25°C           | 5 V               | −65  |        |      | dB   |
| Crosstalk                    | X <sub>TALK</sub>                              | R <sub>L</sub> = 50 Ω,<br>f = 1 MHz,   | Switch ON,<br>See Figure 19              | 25°C           | 5 V               | −65  |        |      | dB   |
| Total harmonic<br>distortion | THD  | R <sub>L</sub> = 600 Ω,<br>C <sub>L</sub> = 50 pF,                               | f = 600 Hz to 20 kHz,<br>See Figure 21   | 25°C           | 5 V               | 0.01 |        |      | %    |
| Supply                       |  |  |  |                |                   |      |        |      |      |
| Positive supply<br>current   | I <sub>+</sub>                                 | V <sub>IN</sub> = V <sub>+</sub> or GND,   | Switch ON or OFF                         | Full           | 5.5 V             | 0.1  |        |      | μA   |

(1)  $T_A = 25^\circ\text{C}$

**Electrical Characteristics for 3.3-V Supply**
 $V_+ = 3\text{ V}$  to  $3.6\text{ V}$  and  $T_A = -40^\circ\text{C}$  to  $85^\circ\text{C}$  (unless otherwise noted)

| PARAMETER  | SYMBOL  | TEST CONDITIONS   |                              | T <sub>A</sub> | V <sub>+</sub> | MIN   | TYP(1) | MAX            | UNIT |
|--|---|---|------------------------------|----------------|----------------|-------|--------|----------------|------|
| Analog Switch                                    |   |   |                              |                |                |       |        |                |      |
| Analog signal range                              | V <sub>COM</sub> ,<br>V <sub>NO</sub> , V <sub>NC</sub> |   |                              |                |                | 0     |        | V <sub>+</sub> | V    |
| Peak<br>ON-state resistance                      | r <sub>peak</sub>                                       | 0 ≤ V <sub>NO</sub> or V <sub>NC</sub> ≤ V <sub>+</sub> ,<br>I <sub>COM</sub> = −24 mA, | Switch ON,<br>See Figure 11  | 25°C           | 3 V            | 1.35  |        | 2.1            | Ω    |
|  |   |   |                              | Full           |                | 2.1   |        |                |      |
| ON-state resistance                              | r <sub>on</sub>   | V <sub>NO</sub> or V <sub>NC</sub> = 2 V,<br>I <sub>COM</sub> = −24 mA,                 | Switch ON,<br>See Figure 11  | 25°C           | 3 V            | 1.15  |        | 1.5            | Ω    |
|  |   |   |                              | Full           |                | 1.5   |        |                |      |
| ON-state resistance<br>match between<br>channels | Δr <sub>on</sub>  | V <sub>NO</sub> or V <sub>NC</sub> = 2 V, 0.8 V,<br>I <sub>COM</sub> = −24 mA,          | Switch ON,<br>See Figure 11  | 25°C           | 3 V            | 0.11  |        |                | Ω    |
| ON-state resistance<br>flatness                  | r <sub>on(flat)</sub>                                   | 0 ≤ V <sub>NO</sub> or V <sub>NC</sub> ≤ V <sub>+</sub> ,<br>I <sub>COM</sub> = −24 mA, | Switch ON,<br>See Figure 11  | 25°C           | 3 V            | 0.225 |        |                | Ω    |
|  |   | V <sub>NO</sub> or V <sub>NC</sub> = 2 V, 0.8 V,<br>I <sub>COM</sub> = −24 mA,          |                              | 25°C           |                | 0.25  |        |                |      |
| NC, NO<br>OFF leakage current                    | I <sub>NC(OFF)</sub> ,<br>I <sub>NO(OFF)</sub>          | V <sub>NC</sub> or V <sub>NO</sub> = 3 V,<br>V <sub>COM</sub> = 0,                      | Switch OFF,<br>See Figure 12 | 25°C           | 3.6 V          | 0.2   |        |                | nA   |
| NC, NO<br>ON leakage current                     | I <sub>NC(ON)</sub> ,<br>I <sub>NO(ON)</sub>            | V <sub>NC</sub> or V <sub>NO</sub> = 3 V,<br>V <sub>COM</sub> = Open,                   | Switch ON,<br>See Figure 13  | 25°C           | 3.6 V          | 2.8   |        |                | nA   |
| COM<br>ON leakage current                        | I <sub>COM(ON)</sub>                                    | V <sub>NC</sub> or V <sub>NO</sub> = 3 V or Open,<br>V <sub>COM</sub> = 3 V,            | Switch ON,<br>See Figure 13  | 25°C           | 3.6 V          | 0.47  |        |                | nA   |
| Digital Inputs (IN)                              |   |   |                              |                |                |       |        |                |      |
| Input logic high                                 | V <sub>IH</sub>   |   |                              | Full           |                | 2     |        | 5.5            | V    |
| Input logic low                                  | V <sub>IL</sub>   |   |                              | Full           |                | 0     |        | 0.6            | V    |
| Input leakage current                            | I <sub>IH</sub> , I <sub>IL</sub>                       | V <sub>IN</sub> = 5.5 V or 0  |                              | Full           | 3.6 V          | −1    |        | 1              | μA   |

(1)  $T_A = 25^\circ\text{C}$

# TS5A3159

## 1-Ω SPDT ANALOG SWITCH

SCDS174B – AUGUST 2004 – REVISED MAY 2005

### Electrical Characteristics for 3.3-V Supply (continued)

( $V_+ = 3\text{ V}$  to  $3.6\text{ V}$  and  $T_A = -40\text{ }^{\circ}\text{C}$  to  $85\text{ }^{\circ}\text{C}$ ) (unless otherwise noted)

| PARAMETER                    | SYMBOL                           | TEST CONDITIONS  | $T_A$        | $V_+$           | MIN   | TYP(1) | MAX | UNIT          |
|------------------------------|----------------------------------|--|--------------|-----------------|-------|--------|-----|---------------|
| <b>Dynamic</b>               |                                  |  |              |                 |       |        |     |               |
| Turn-on time                 | $t_{ON}$                         | $V_{COM} = V_+$ ,<br>$R_L = 50\text{ }\Omega$ ,<br>$C_L = 35\text{ pF}$ ,<br>See Figure 15                         | 25°C<br>Full | 3 V to<br>3.6 V | 30    | 40     | 55  | ns            |
| Turn-off time                | $t_{OFF}$                        | $V_{COM} = V_+$ ,<br>$R_L = 50\text{ }\Omega$ ,<br>$C_L = 35\text{ pF}$ ,<br>See Figure 15                         | 25°C<br>Full | 3 V to<br>3.6 V | 20    | 25     | 40  | ns            |
| Break-before-make time       | $t_{BBM}$                        | $V_{NC} = V_{NO} = V_+/2$ ,<br>$R_L = 50\text{ }\Omega$ ,<br>$C_L = 35\text{ pF}$ ,<br>See Figure 16               | 25°C<br>Full | 3 V to<br>3.6 V | 1     | 21     | 29  | ns            |
| Charge injection             | $Q_C$                            | $C_L = 1\text{ nF}$ , $V_{GEN} = 0\text{ V}$ ,<br>See Figure 20  | 25°C         | 3.3 V           | 20    |        |     | pC            |
| NC, NO<br>OFF capacitance    | $C_{NC(OFF)}$ ,<br>$C_{NO(OFF)}$ | $V_{NC}$ or $V_{NO} = V_+$ or GND,<br>Switch OFF,<br>See Figure 14   | 25°C         | 3.3 V           | 23    |        |     | pF            |
| NC, NO<br>ON capacitance     | $C_{NC(ON)}$ ,<br>$C_{NO(ON)}$   | $V_{NC}$ or $V_{NO} = V_+$ or GND,<br>Switch ON,<br>See Figure 14  | 25°C         | 3.3V            | 84    |        |     | pF            |
| COM<br>ON capacitance        | $C_{COM(ON)}$                    | $V_{COM} = V_+$ or GND,<br>Switch ON,<br>See Figure 14   | 25°C         | 3.3 V           | 84    |        |     | pF            |
| Digital input<br>capacitance | $C_{IN}$                         | $V_{IN} = V_+$ or GND,<br>See Figure 14  | 25°C         | 3.3 V           | 2.1   |        |     | pF            |
| Bandwidth                    | BW                               | $R_L = 50\text{ }\Omega$ ,<br>Switch ON,<br>See Figure 17  | 25°C         | 3.3 V           | 100   |        |     | MHz           |
| OFF isolation                | $O_{ISO}$                        | $R_L = 50\text{ }\Omega$ ,<br>$f = 1\text{ MHz}$ ,<br>Switch OFF,<br>See Figure 18                                 | 25°C         | 3.3 V           | -65   |        |     | dB            |
| Crosstalk                    | $X_{TALK}$                       | $R_L = 50\text{ }\Omega$ ,<br>$f = 1\text{ MHz}$ ,<br>Switch ON,<br>See Figure 19                                  | 25°C         | 3.3 V           | -65   |        |     | dB            |
| Total harmonic<br>distortion | THD                              | $R_L = 600\text{ }\Omega$ ,<br>$C_L = 50\text{ pF}$ ,<br>$f = 600\text{ Hz}$ to $20\text{ kHz}$ ,<br>See Figure 21 | 25°C         | 3.3 V           | 0.015 |        |     | %             |
| <b>Supply</b>                |                                  |  |              |                 |       |        |     |               |
| Positive supply<br>current   | $I_+$                            | $V_{IN} = V_+$ or GND,<br>Switch ON or OFF   | Full         | 3.6 V           | 0.1   |        |     | $\mu\text{A}$ |

(1)  $T_A = 25^{\circ}\text{C}$

## Electrical Characteristics for 2.5-V Supply

$V_+ = 2.3 \text{ V}$  to  $2.7 \text{ V}$  and  $T_A = -40^\circ\text{C}$  to  $85^\circ\text{C}$  (unless otherwise noted)

| PARAMETER  | SYMBOL  | TEST CONDITIONS  |                              | T <sub>A</sub> | V <sub>+</sub> | MIN  | TYP(1) | MAX            | UNIT |
|--|---|--|------------------------------|----------------|----------------|------|--------|----------------|------|
| Analog Switch                                    |   |  |                              |                |                |      |        |                |      |
| Analog signal range                              | V <sub>COM</sub> ,<br>V <sub>NO</sub> , V <sub>NC</sub> |  |                              |                |                | 0    |        | V <sub>+</sub> | V    |
| Peak<br>ON-state resistance                      | r <sub>peak</sub>                                       | 0 ≤ V <sub>NO</sub> or V <sub>NC</sub> ≤ V <sub>+</sub> ,<br>I <sub>COM</sub> = −8 mA, | Switch ON,<br>See Figure 11  | 25°C<br>Full   | 2.5 V          | 1.7  | 2.7    | 2.7            | Ω    |
| ON-state resistance                              | r <sub>on</sub>   | V <sub>NO</sub> or V <sub>NC</sub> = 1.8 V,<br>I <sub>COM</sub> = −8 mA,               | Switch ON,<br>See Figure 11  | 25°C<br>Full   | 2.5 V          | 1.45 | 2      | 2              | Ω    |
| ON-state resistance<br>match between<br>channels | Δr <sub>on</sub>  | V <sub>NO</sub> or V <sub>NC</sub> = 0.8 V, 1.8 V,<br>I <sub>COM</sub> = −8 mA,        | Switch ON,<br>See Figure 11  | 25°C           | 2.5 V          | 0.7  |        |                | Ω    |
| ON-state resistance<br>flatness                  | r <sub>on(flat)</sub>                                   | 0 ≤ V <sub>NO</sub> or V <sub>NC</sub> ≤ V <sub>+</sub> ,<br>I <sub>COM</sub> = −8 mA, | Switch ON,<br>See Figure 11  | 25°C           | 2.5 V          | 0.5  |        |                | Ω    |
|  |   | V <sub>NO</sub> or V <sub>NC</sub> = 0.8 V, 1.8 V,<br>I <sub>COM</sub> = −8 mA,        |                              | 25°C           |                | 0.45 |        |                |      |
| NC, NO<br>Off leakage current                    | I <sub>NC(OFF)</sub> ,<br>I <sub>NO(OFF)</sub>          | V <sub>NC</sub> or V <sub>NO</sub> = 2.3 V,<br>V <sub>COM</sub> = 0,                   | Switch OFF,<br>See Figure 12 | 25°C           | 2.7 V          | 0.2  |        |                | nA   |
| NC, NO<br>On leakage current                     | I <sub>NC(ON)</sub> ,<br>I <sub>NO(ON)</sub>            | V <sub>NC</sub> or V <sub>NO</sub> = 2.3 V,<br>V <sub>COM</sub> = Open,                | Switch ON,<br>See Figure 13  | 25°C           | 2.7 V          | 2.8  |        |                | nA   |
| COM<br>On leakage current                        | I <sub>COM(ON)</sub>                                    | V <sub>NC</sub> or V <sub>NO</sub> = 2.3 V or Open,<br>V <sub>COM</sub> = 2.3 V,       | Switch ON,<br>See Figure 13  | 25°C           | 2.7 V          | 0.47 |        |                | nA   |
| Digital Inputs (IN)                              |   |  |                              |                |                |      |        |                |      |
| Input logic high                                 | V <sub>IH</sub>   |  |                              | Full           |                | 1.8  |        | 5.5            | V    |
| Input logic low                                  | V <sub>IL</sub>   |  |                              | Full           |                | 0    | 0.6    |                | V    |
| Input leakage current                            | I <sub>IH</sub> , I <sub>IL</sub>                       | V <sub>IN</sub> = 5.5 V or 0   |                              | Full           | 2.7 V          | −1   |        | 1              | μA   |

(1)  $T_A = 25^\circ\text{C}$

# TS5A3159

## 1-Ω SPDT ANALOG SWITCH

SCDS174B – AUGUST 2004 – REVISED MAY 2005

### Electrical Characteristics for 2.5-V Supply (continued)

$V_+ = 2.3 \text{ V to } 2.7 \text{ V}$  and  $T_A = -40^\circ\text{C to } 85^\circ\text{C}$  (unless otherwise noted)

| PARAMETER                    | SYMBOL   | TEST CONDITIONS  |  | T <sub>A</sub> | V <sub>+</sub>    | MIN   | TYP(1) | MAX | UNIT |
|------------------------------|--|--|--|----------------|-------------------|-------|--------|-----|------|
| Dynamic                      |  |  |  |                |                   |       |        |     |      |
| Turn-on time                 | t <sub>ON</sub>                                | V <sub>COM</sub> = V <sub>+</sub> ,<br>R <sub>L</sub> = 50 Ω,                    | C <sub>L</sub> = 35 pF,<br>See Figure 15 | 25°C           | 2.3 V to<br>2.7 V | 40    | 55     | 70  | ns   |
|                              |  |  |  | Full           |                   |       |        |     |      |
| Turn-off time                | t <sub>OFF</sub>                               | V <sub>COM</sub> = V <sub>+</sub> ,<br>R <sub>L</sub> = 50 Ω,                    | C <sub>L</sub> = 35 pF,<br>See Figure 15 | 25°C           | 2.3 V to<br>2.7 V | 30    | 40     | 55  | ns   |
|                              |  |  |  | Full           |                   |       |        |     |      |
| Break-before-make time       | t <sub>BBM</sub>                               | V <sub>NC</sub> = V <sub>NO</sub> = V <sub>+</sub> /2,<br>R <sub>L</sub> = 50 Ω, | C <sub>L</sub> = 35 pF,<br>See Figure 16 | 25°C           | 2.3 V to<br>2.7 V | 1     | 33     | 39  | ns   |
|                              |  |  |  | Full           |                   | 1     |        |     |      |
| Charge injection             | Q <sub>C</sub>                                 | C <sub>L</sub> = 1 nF, V <sub>GEN</sub> = 0 V,                                   | See Figure 20                            | 25°C           | 2.5 V             | 13    |        |     | pC   |
| NC, NO<br>OFF capacitance    | C <sub>NC(OFF)</sub> ,<br>C <sub>NO(OFF)</sub> | V <sub>NC</sub> or V <sub>NO</sub> = V <sub>+</sub> or GND,<br>Switch OFF,       | See Figure 14                            | 25°C           | 2.5 V             | 23    |        |     | pF   |
| NC, NO<br>ON capacitance     | C <sub>NC(ON)</sub> ,<br>C <sub>NO(ON)</sub>   | V <sub>NC</sub> or V <sub>NO</sub> = V <sub>+</sub> or GND,<br>Switch ON,        | See Figure 14                            | 25°C           | 2.5V              | 84    |        |     | pF   |
| COM<br>ON capacitance        | C <sub>COM(ON)</sub>                           | V <sub>COM</sub> = V <sub>+</sub> or GND,<br>Switch ON,                          | See Figure 14                            | 25°C           | 2.5 V             | 84    |        |     | pF   |
| Digital input<br>capacitance | C <sub>IN</sub>                                | V <sub>IN</sub> = V <sub>+</sub> or GND,   | See Figure 14                            | 25°C           | 2.5 V             | 2.1   |        |     | pF   |
| Bandwidth                    | BW   | R <sub>L</sub> = 50 Ω,<br>Switch ON,   | See Figure 17                            | 25°C           | 2.5 V             | 100   |        |     | MHz  |
| OFF isolation                | O <sub>ISO</sub>                               | R <sub>L</sub> = 50 Ω,<br>f = 1 MHz,   | Switch OFF,<br>See Figure 18             | 25°C           | 2.5 V             | −64   |        |     | dB   |
| Crosstalk                    | X <sub>TALK</sub>                              | R <sub>L</sub> = 50 Ω,<br>f = 1 MHz,   | Switch ON,<br>See Figure 19              | 25°C           | 2.5 V             | −64   |        |     | dB   |
| Total harmonic<br>distortion | THD  | R <sub>L</sub> = 600 Ω,<br>C <sub>L</sub> = 50 pF,                               | f = 600 Hz to 20 kHz,<br>See Figure 21   | 25°C           | 2.5 V             | 0.025 |        |     | %    |
| Supply                       |  |  |  |                |                   |       |        |     |      |
| Positive supply<br>current   | I <sub>+</sub>                                 | V <sub>IN</sub> = V <sub>+</sub> or GND,   | Switch ON or OFF                         | Full           | 2.7 V             | 0.1   |        |     | μA   |

(1)  $T_A = 25^\circ\text{C}$



## Electrical Characteristics for 1.8-V Supply

$V_+ = 1.65\text{ V}$  to  $1.95\text{ V}$  and  $T_A = -40^\circ\text{C}$  to  $85^\circ\text{C}$  (unless otherwise noted)

| PARAMETER                                  | SYMBOL                     | TEST CONDITIONS  | $T_A$                        | $V_+$  | MIN | TYP(1)                     | MAX   | UNIT          |
|--|----------------------------|--|------------------------------|--------|-----|----------------------------|-------|---------------|
| <b>Analog Switch</b>                       |                            |  |                              |        |     |                            |       |               |
| Analog signal range                        | $V_{COM}, V_{NO}, V_{NC}$  |  |                              |        | 0   |                            | $V_+$ | V             |
| Peak ON-state resistance                   | $r_{peak}$                 | $0 \leq V_{NO} \text{ or } V_{NC} \leq V_+$ ,<br>$I_{COM} = -2\text{ mA}$ ,<br>Switch ON,<br>See Figure 11   | 25°C<br>Full                 | 1.8 V  |     | 4<br>4.9                   | 4.9   | $\Omega$      |
| ON-state resistance                        | $r_{on}$                   | $V_{NO} \text{ or } V_{NC} = 1.5\text{ V}$ ,<br>$I_{COM} = -2\text{ mA}$ ,<br>Switch ON,<br>See Figure 11  | 25°C<br>Full                 | 1.8 V  |     | 1.7<br>3.2                 | 3.2   | $\Omega$      |
| ON-state resistance match between channels | $\Delta r_{on}$            | $V_{NO} \text{ or } V_{NC} = 0.6\text{ V}, 1.5\text{ V}$ ,<br>$I_{COM} = -2\text{ mA}$ ,<br>Switch ON,<br>See Figure 11  | 25°C<br>Full                 | 1.8 V  |     | 0.7<br>0.7                 |       | $\Omega$      |
| ON-state resistance flatness               | $r_{on(flat)}$             | $0 \leq V_{NO} \text{ or } V_{NC} \leq V_+$ ,<br>$I_{COM} = -2\text{ mA}$ ,<br>$V_{NO} \text{ or } V_{NC} = 0.6\text{ V}, 1.5\text{ V}$ ,<br>$I_{COM} = -2\text{ mA}$ ,<br>Switch ON,<br>See Figure 11 | 25°C<br>Full<br>25°C<br>Full | 1.8 V  |     | 1.85<br>1.85<br>0.9<br>0.9 |       | $\Omega$      |
| NC, NO Off leakage current                 | $I_{NC(OFF)}, I_{NO(OFF)}$ | $V_{NC} \text{ or } V_{NO} = 1.65\text{ V}$ ,<br>$V_{COM} = 0$ ,<br>Switch OFF,<br>See Figure 12   | 25°C                         | 1.95 V |     | 0.2                        |       | nA            |
| NC, NO On leakage current                  | $I_{NC(ON)}, I_{NO(ON)}$   | $V_{NC} \text{ or } V_{NO} = 1.65\text{ V}$ ,<br>$V_{COM} = \text{Open}$ ,<br>Switch ON,<br>See Figure 13  | 25°C                         | 1.95 V |     | 2.8                        |       | nA            |
| COM On leakage current                     | $I_{COM(ON)}$              | $V_{NC} \text{ or } V_{NO} = 1.65\text{ V}$ or Open,<br>$V_{COM} = 1.65\text{ V}$ ,<br>Switch ON,<br>See Figure 13   | 25°C                         | 1.95 V |     | 0.47                       |       | nA            |
| <b>Digital Inputs (IN)</b>                 |                            |  |                              |        |     |                            |       |               |
| Input logic high                           | $V_{IH}$                   |  | Full                         |        | 1.5 |                            | 5.5   | V             |
| Input logic low                            | $V_{IL}$                   |  | Full                         |        | 0   |                            | 0.6   | V             |
| Input leakage current                      | $I_{IH}, I_{IL}$           | $V_{IN} = 5.5\text{ V}$ or 0   | Full                         | 1.95 V | -1  |                            | 1     | $\mu\text{A}$ |

(1)  $T_A = 25^\circ\text{C}$

# TS5A3159

## 1-Ω SPDT ANALOG SWITCH

SCDS174B – AUGUST 2004 – REVISED MAY 2005

### Electrical Characteristics for 1.8-V Supply (continued)

$V_+ = 1.65\text{ V to }1.95\text{ V}$  and  $T_A = -40^\circ\text{C to }85^\circ\text{C}$  (unless otherwise noted)

| PARAMETER                    | SYMBOL                           | TEST CONDITIONS  | $T_A$        | $V_+$               | MIN      | TYP(1) | MAX | UNIT          |
|------------------------------|----------------------------------|--|--------------|---------------------|----------|--------|-----|---------------|
| <b>Dynamic</b>               |                                  |  |              |                     |          |        |     |               |
| Turn-on time                 | $t_{ON}$                         | $V_{COM} = V_+$ ,<br>$R_L = 50\ \Omega$ ,<br>$C_L = 35\text{ pF}$ ,<br>See Figure 15           | 25°C<br>Full | 1.65 V to<br>1.95 V | 65       | 70     | 95  | ns            |
| Turn-off time                | $t_{OFF}$                        | $V_{COM} = V_+$ ,<br>$R_L = 50\ \Omega$ ,<br>$C_L = 35\text{ pF}$ ,<br>See Figure 15           | 25°C<br>Full | 1.65 V to<br>1.95 V | 40       | 55     | 70  | ns            |
| Break-before-make time       | $t_{BBM}$                        | $V_{NC} = V_{NO} = V_+/2$ ,<br>$R_L = 50\ \Omega$ ,<br>$C_L = 35\text{ pF}$ ,<br>See Figure 16 | 25°C<br>Full | 1.65 V to<br>1.95 V | 1<br>0.5 | 60     | 72  | ns            |
| Charge injection             | $Q_C$                            | $C_L = 1\text{ nF}$ , $V_{GEN} = 0\text{ V}$ ,<br>See Figure 20                                | 25°C         | 1.8 V               | 13       |        |     | pC            |
| NC, NO<br>OFF capacitance    | $C_{NC(OFF)}$ ,<br>$C_{NO(OFF)}$ | $V_{NC}$ or $V_{NO} = V_+$ or GND,<br>Switch OFF,<br>See Figure 14                             | 25°C         | 1.8 V               | 23       |        |     | pF            |
| NC, NO<br>ON capacitance     | $C_{NC(ON)}$ ,<br>$C_{NO(ON)}$   | $V_{NC}$ or $V_{NO} = V_+$ or GND,<br>Switch ON,<br>See Figure 14                              | 25°C         | 1.8 V               | 84       |        |     | pF            |
| COM<br>ON capacitance        | $C_{COM(ON)}$                    | $V_{COM} = V_+$ or GND,<br>Switch ON,<br>See Figure 14   | 25°C         | 1.8 V               | 84       |        |     | pF            |
| Digital input<br>capacitance | $C_{IN}$                         | $V_{IN} = V_+$ or GND,<br>See Figure 14  | 25°C         | 1.8 V               | 2.1      |        |     | pF            |
| Bandwidth                    | BW                               | $R_L = 50\ \Omega$ ,<br>Switch ON,<br>See Figure 17  | 25°C         | 1.8 V               | 100      |        |     | MHz           |
| OFF isolation                | $O_{ISO}$                        | $R_L = 50\ \Omega$ ,<br>$f = 1\text{ MHz}$ ,<br>Switch OFF,<br>See Figure 18                   | 25°C         | 1.8 V               | -63      |        |     | dB            |
| Crosstalk                    | $X_{TALK}$                       | $R_L = 50\ \Omega$ ,<br>$f = 1\text{ MHz}$ ,<br>Switch ON,<br>See Figure 19                    | 25°C         | 1.8 V               | -63      |        |     | dB            |
| <b>Supply</b>                |                                  |  |              |                     |          |        |     |               |
| Positive supply<br>current   | $I_+$                            | $V_{IN} = V_+$ or GND,<br>Switch ON or<br>OFF  | Full         | 1.95 V              |          | 0.1    |     | $\mu\text{A}$ |

(1)  $T_A = 25^\circ\text{C}$

## TYPICAL PERFORMANCE

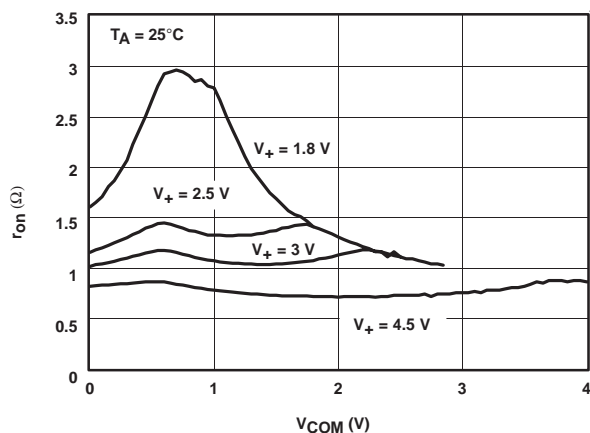


Figure 1.  $r_{on}$  vs  $V_{COM}$

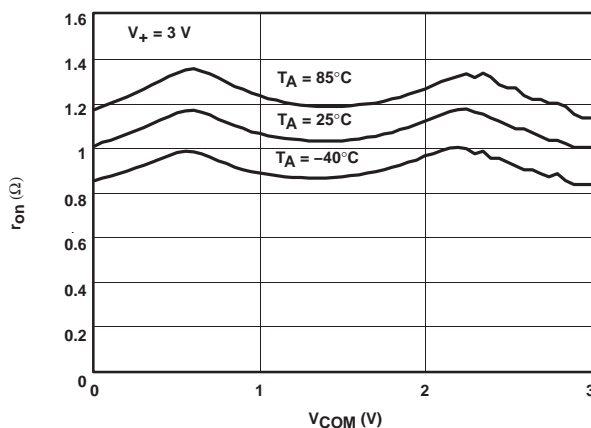


Figure 2.  $r_{on}$  vs  $V_{COM}$

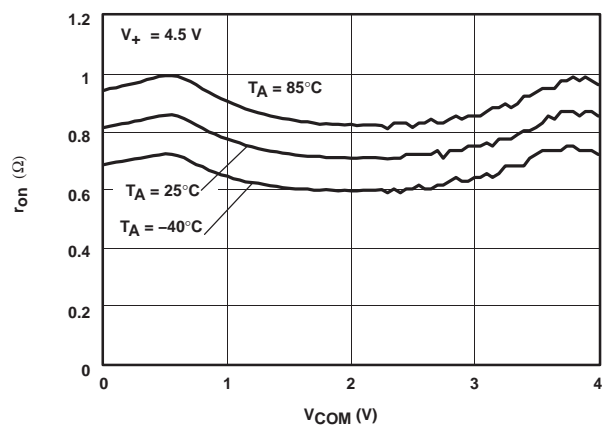


Figure 3.  $r_{on}$  vs  $V_{COM}$

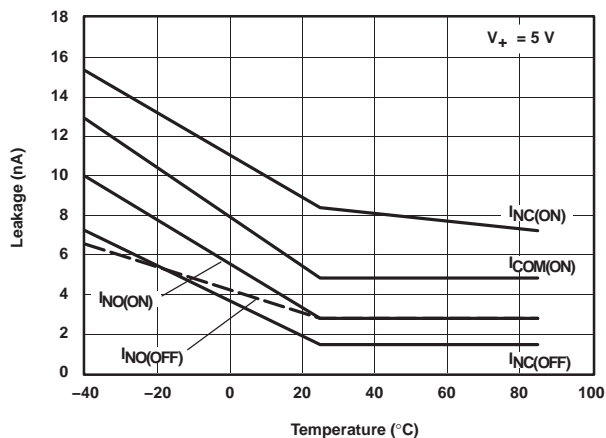


Figure 4. Leakage Current vs Temperature

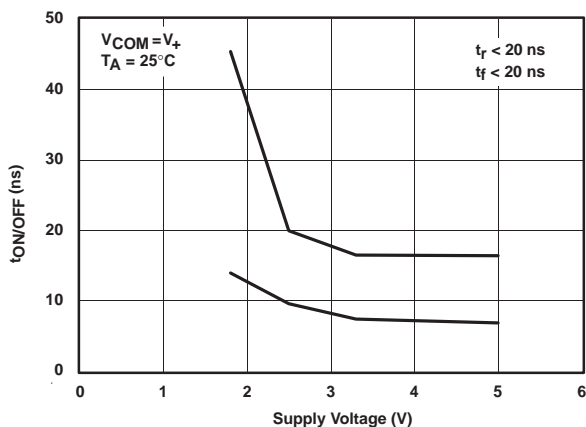


Figure 5.  $t_{ON/OFF}$  vs  $V_+$



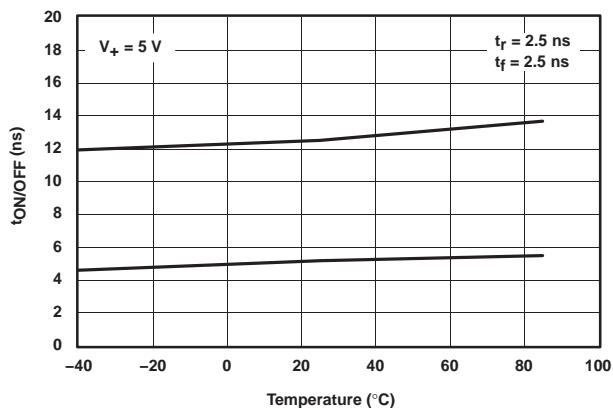



Figure 6.  $t_{ON/OFF}$  vs Temperature

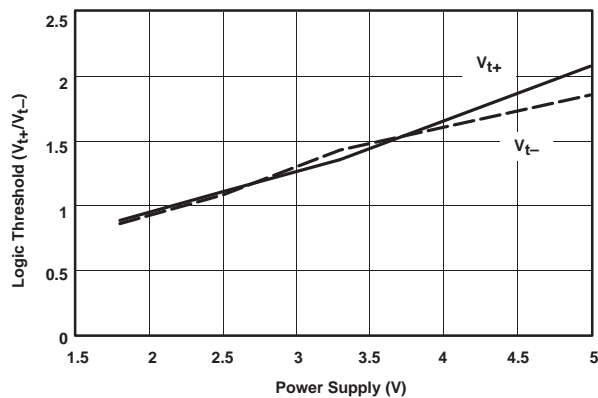


**Figure 7. Logic Threshold vs Power Supply**

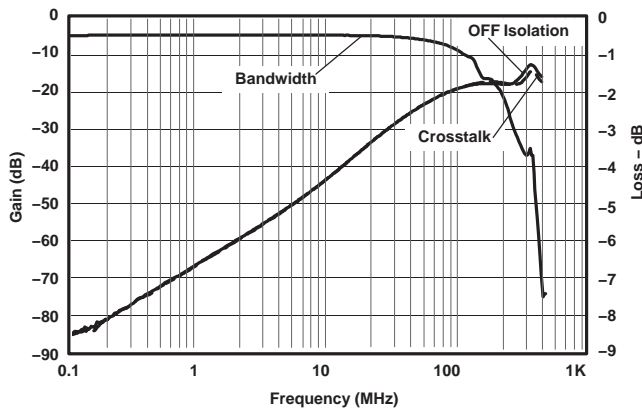

**Figure 8. Frequency Response**

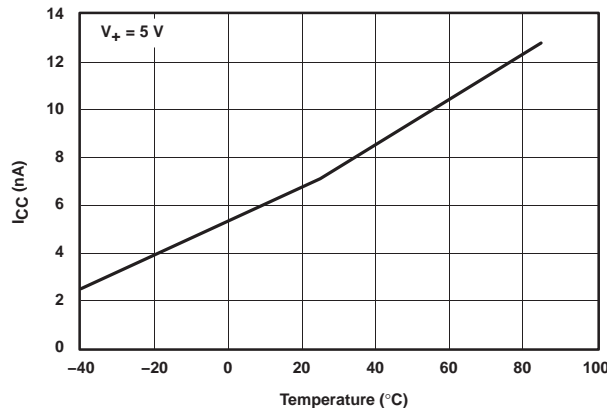

**Figure 9. Power-Supply Current vs Temperature**

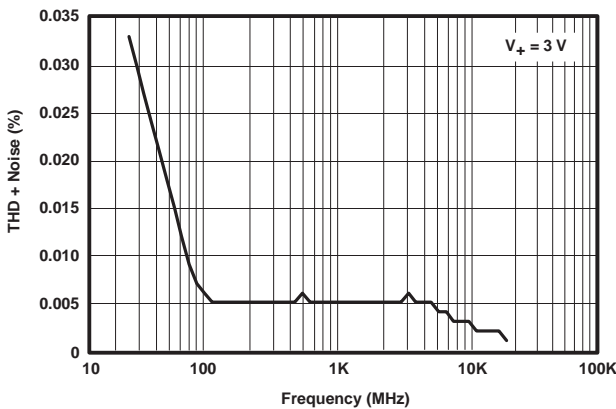

**Figure 10. Total Harmonic Distortion (THD) vs Frequency**

**PIN DESCRIPTION**

| PIN<br>NUMBER | NAME           | DESCRIPTION   |
|---------------|----------------|---|
| 1             | NO             | Normally-open terminal  |
| 2             | GND            | Digital ground  |
| 3             | NC             | Normally-closed terminal  |
| 4             | COM            | Common terminal   |
| 5             | V <sub>+</sub> | Power supply  |
| 6             | IN             | Digital control pin to connect COM terminal to NO or NC terminals |

**PARAMETER DESCRIPTION**

| SYMBOL                            | DESCRIPTION  |
|-----------------------------------|--|
| V <sub>COM</sub>                  | Voltage at COM   |
| V <sub>NC</sub>                   | Voltage at NC  |
| V <sub>NO</sub>                   | Voltage at NO  |
| r <sub>on</sub>                   | Resistance between COM and NC or COM and NO ports, when the channel is ON  |
| r <sub>peak</sub>                 | Peak ON-state resistance over a specified voltage range  |
| Δr <sub>on</sub>                  | Difference of r <sub>on</sub> between channels   |
| r <sub>on(flat)</sub>             | Difference between the maximum and minimum value of r <sub>on</sub> in a channel over the specified range of conditions  |
| I <sub>NC(OFF)</sub>              | Leakage current measured at the NC port, with the corresponding channel (NC to COM) in the OFF state under worst-case input and output conditions  |
| I <sub>NO(OFF)</sub>              | Leakage current measured at the NO port, with the corresponding channel (NO to COM) in the OFF state under worst-case input and output conditions  |
| I <sub>NC(ON)</sub>               | Leakage current measured at the NC port, with the corresponding channel (NC to COM) in the ON state and the output (COM) being open  |
| I <sub>NO(ON)</sub>               | Leakage current measured at the NO port, with the corresponding channel (NO to COM) in the ON state and the output (COM) being open  |
| I <sub>COM(ON)</sub>              | Leakage current measured at the COM port, with the corresponding channel (COM to NO or COM to NC) in the ON state and the output (NC or NO) being open   |
| V <sub>IH</sub>                   | Minimum input voltage for logic high for the control input (IN)  |
| V <sub>IL</sub>                   | Minimum input voltage for logic low for the control input (IN)   |
| V <sub>IN</sub>                   | Voltage at IN  |
| I <sub>IH</sub> , I <sub>IL</sub> | Leakage current measured at IN   |
| t <sub>ON</sub>                   | Turn-on time for the switch. This parameter is measured under the specified range of conditions and by the propagation delay between the digital control (IN) signal and analog outputs (COM, NC, or NO) signal, when the switch is turning ON.  |
| t <sub>OFF</sub>                  | Turn-off time for the switch. This parameter is measured under the specified range of conditions and by the propagation delay between the digital control (IN) signal and analog outputs (COM, NC, or NO) signal, when the switch is turning OFF.  |
| t <sub>BBM</sub>                  | Break-before-make time. This parameter is measured under the specified range of conditions and by the propagation delay between the output of two adjacent analog channels (NC and NO), when the control signal changes state.   |
| Q <sub>C</sub>                    | Charge injection is a measurement of unwanted signal coupling from the control (IN) input to the analog (NC, NO, or COM) output. This is measured in coulomb (C) and measured by the total charge induced due to switching of the control input. Charge injection, Q <sub>C</sub> = C <sub>L</sub> × ΔV <sub>O</sub> , C <sub>L</sub> is the load capacitance, and ΔV <sub>O</sub> is the change in analog output voltage. |

**PARAMETER DESCRIPTION (continued)**

| <b>SYMBOL</b> | <b>DESCRIPTION</b>   |
|---------------|--|
| $C_{NC(OFF)}$ | Capacitance at the NC port when the corresponding channel (NC to COM) is OFF   |
| $C_{NO(OFF)}$ | Capacitance at the NO port when the corresponding channel (NO to COM) is OFF   |
| $C_{NC(ON)}$  | Capacitance at the NC port when the corresponding channel (NC to COM) is ON  |
| $C_{NO(ON)}$  | Capacitance at the NO port when the corresponding channel (NO to COM) is ON  |
| $C_{COM(ON)}$ | Capacitance at the COM port when the corresponding channel (COM to NC or COM to NO) is ON  |
| $C_{IN}$      | Capacitance of IN  |
| $O_{ISO}$     | OFF isolation of the switch is a measurement OFF-state switch impedance. This is measured in dB in a specific frequency, with the corresponding channel (NC to COM or NO to COM) in the OFF state. |
| $X_{TALK}$    | Crosstalk is a measurement of unwanted signal coupling from an ON channel to an OFF channel (NC to NO or NO to NC). This is measured in a specific frequency and in dB.                            |
| BW            | Bandwidth of the switch. This is the frequency in which the gain of an ON channel is –3 dB below the DC gain.  |
| $I_+$         | Static power-supply current with the control (IN) pin at $V_+$ or GND  |
| $\Delta I_+$  | This is the increase in $I_+$ for each control (IN) input that is at the specified voltage, rather than at $V_+$ or GND.   |

## PARAMETER MEASUREMENT INFORMATION

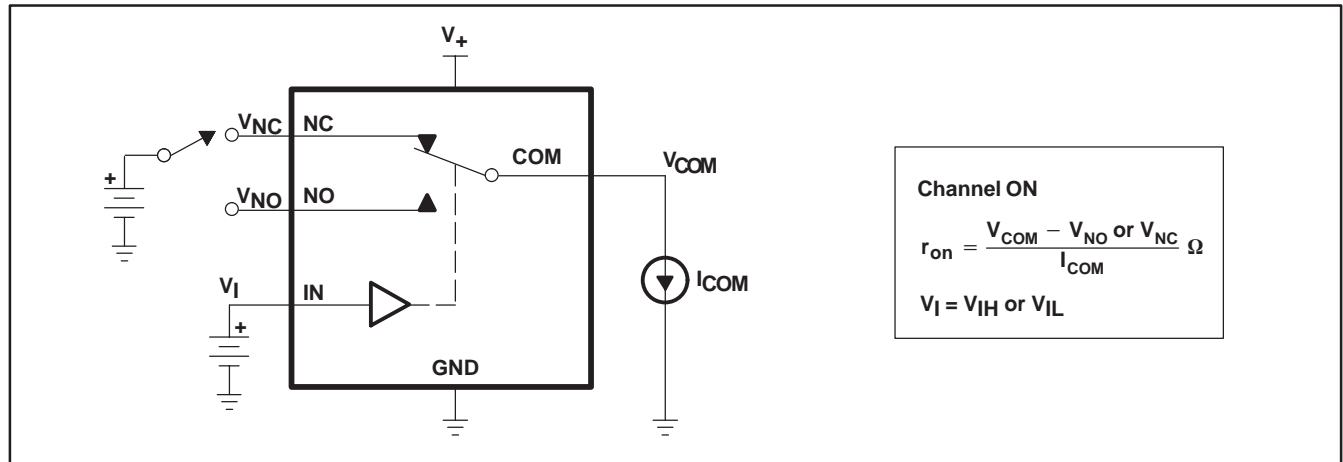


Figure 11. ON-State Resistance ( $r_{on}$ )

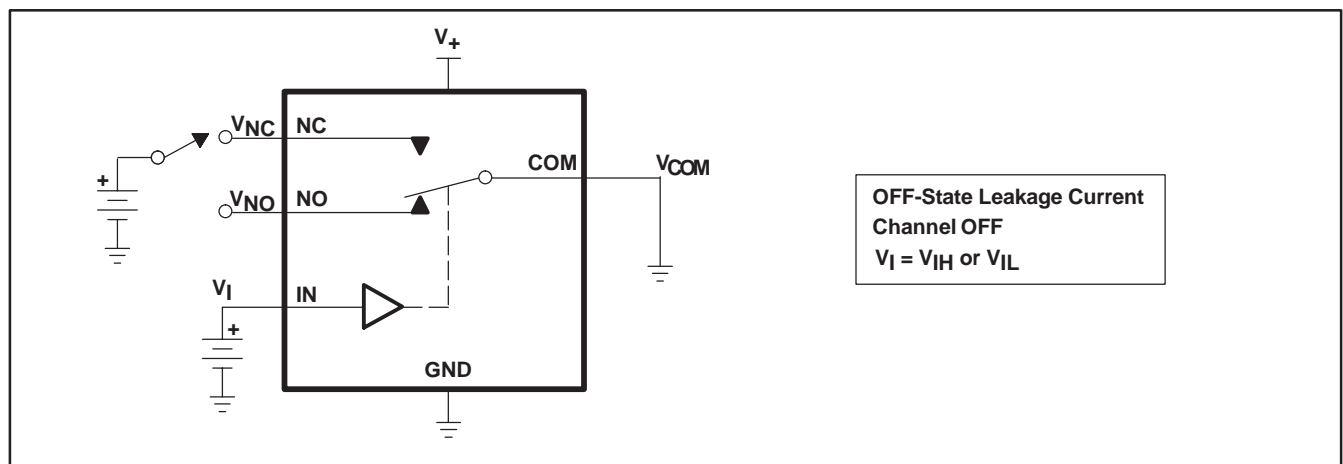


Figure 12. OFF-State Leakage Current ( $I_{NC(OFF)}$ ,  $I_{NO(OFF)}$ )



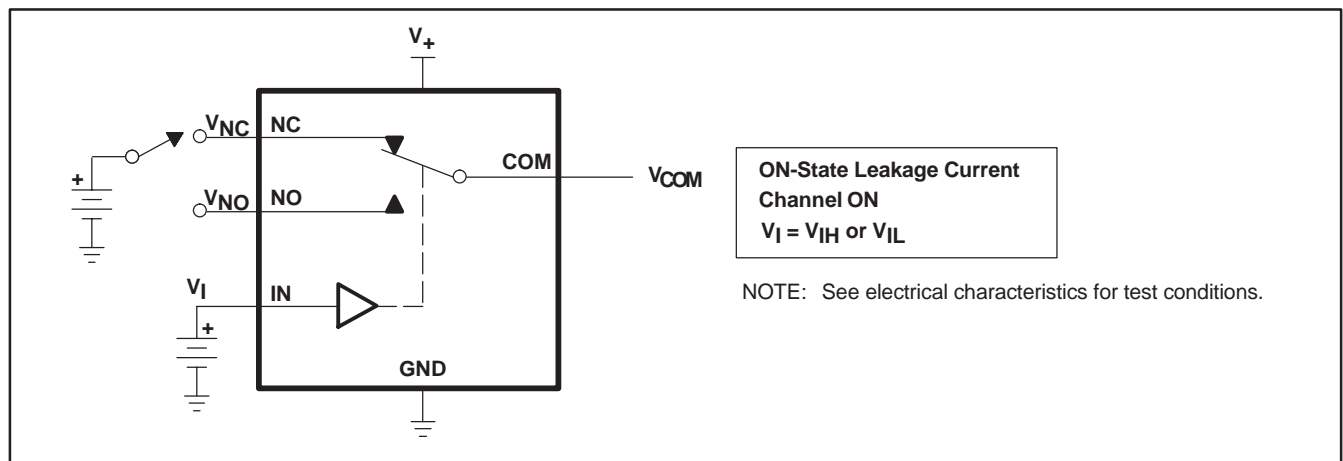


Figure 13. ON-State Leakage Current ( $I_{COM(ON)}$ ,  $I_{NC(ON)}$ ,  $I_{NO(ON)}$ )

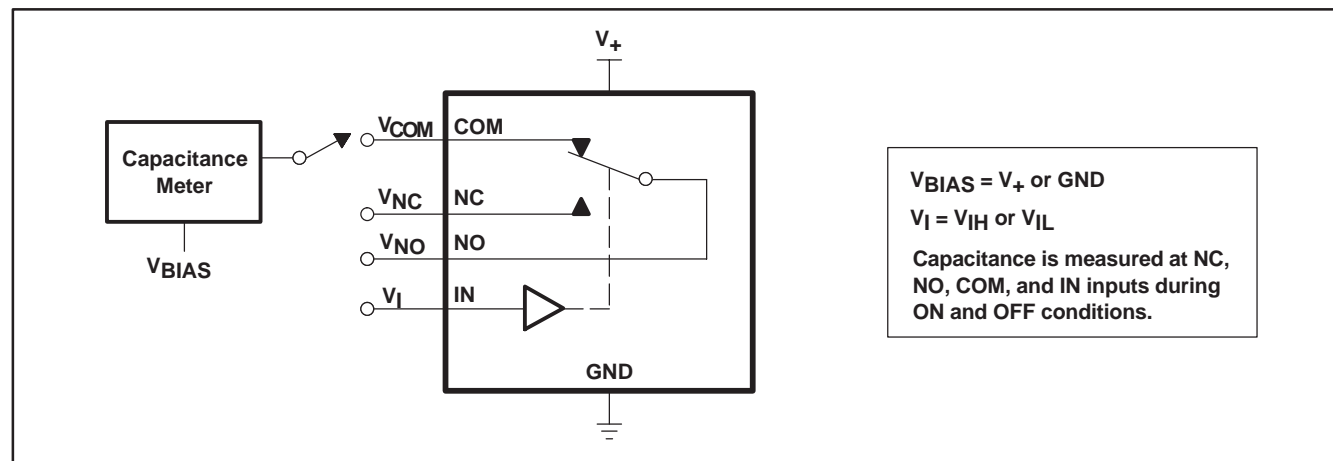


**Figure 14. Capacitance ( $C_I$ ,  $C_{COM(ON)}$ ,  $C_{NC(OFF)}$ ,  $C_{NO(OFF)}$ ,  $C_{NC(ON)}$ ,  $C_{NO(ON)}$ )**

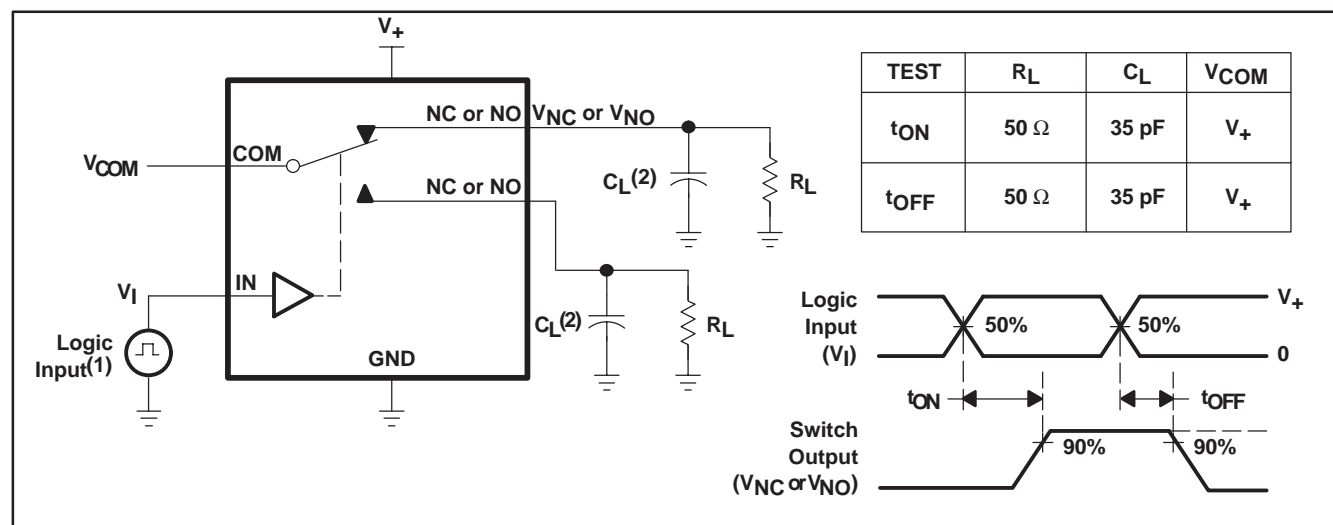

- (1) All input pulses are supplied by generators having the following characteristics: PRR  $\leq$  10 MHz,  $Z_O = 50 \Omega$ ,  $t_r < 5 \text{ ns}$ ,  $t_f < 5 \text{ ns}$ .  
 (2)  $C_L$  includes probe and jig capacitance.

**Figure 15. Turn-On ( $t_{ON}$ ) and Turn-Off Time ( $t_{OFF}$ )**

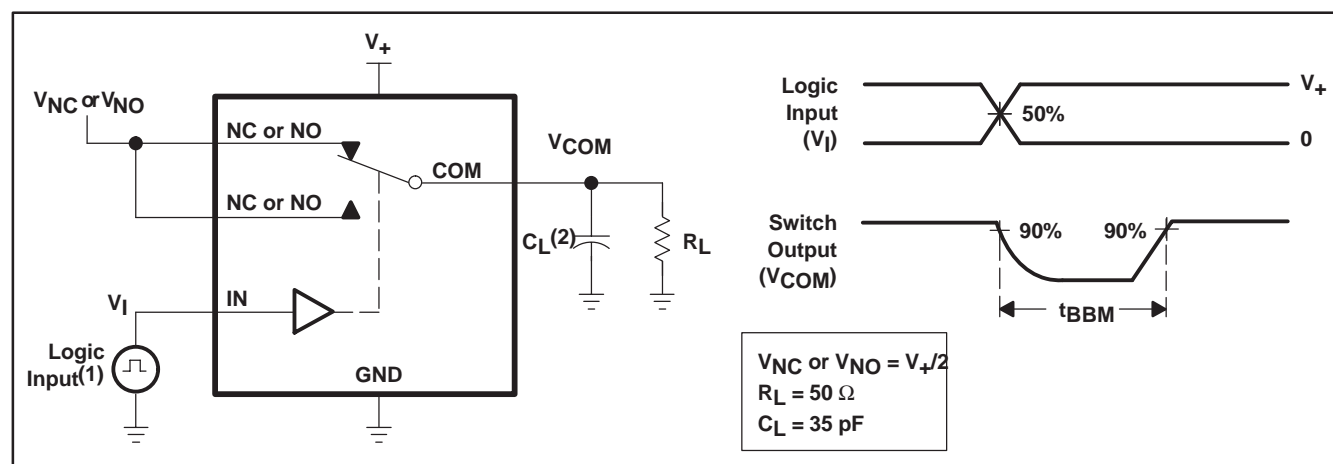

- (1) All input pulses are supplied by generators having the following characteristics: PRR  $\leq$  10 MHz,  $Z_O = 50 \Omega$ ,  $t_r < 5 \text{ ns}$ ,  $t_f < 5 \text{ ns}$ .  
 (2)  $C_L$  includes probe and jig capacitance.

**Figure 16. Break-Before-Make Time ( $t_{BBM}$ )**



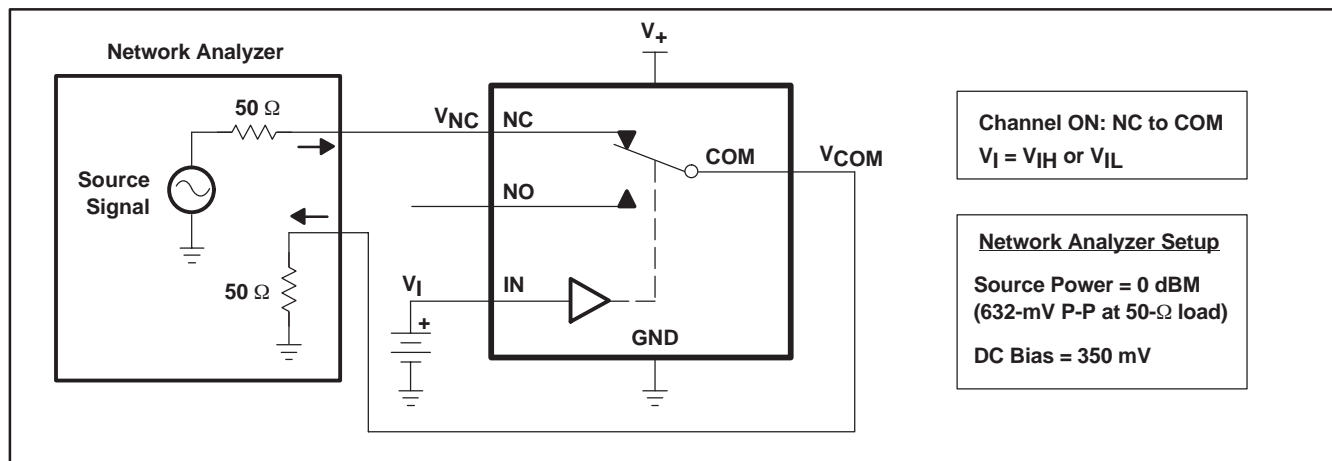


Figure 17. Bandwidth (BW)

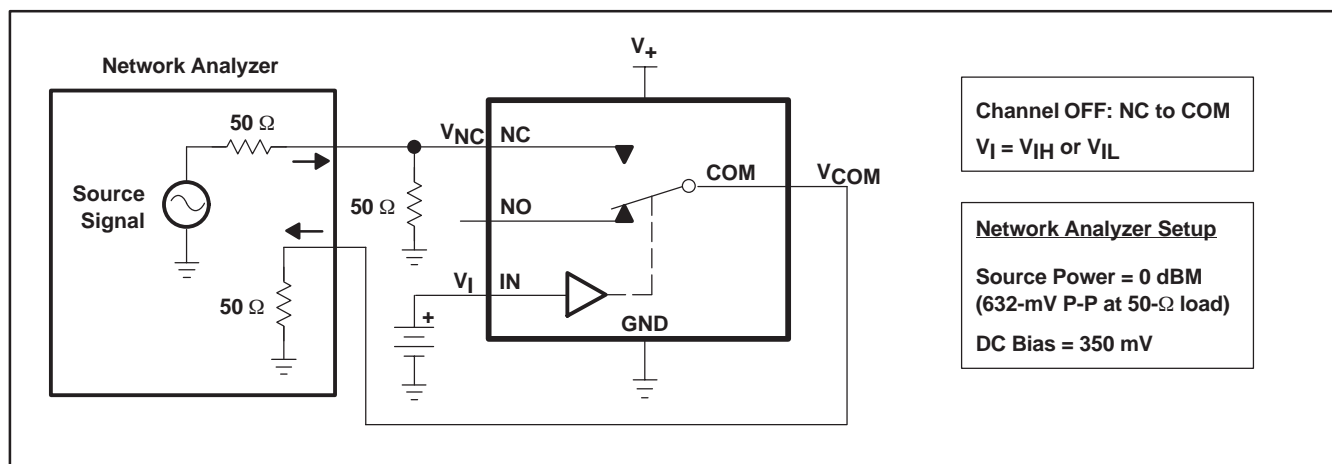


Figure 18. OFF Isolation ( $O_{ISO}$ )



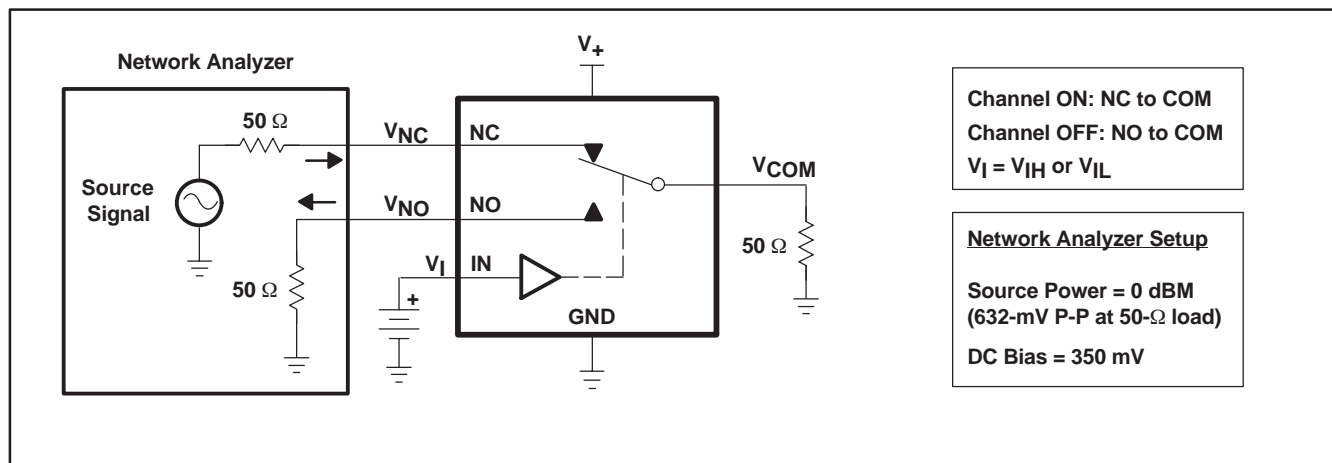


Figure 19. Crosstalk ( $X_{TALK}$ )

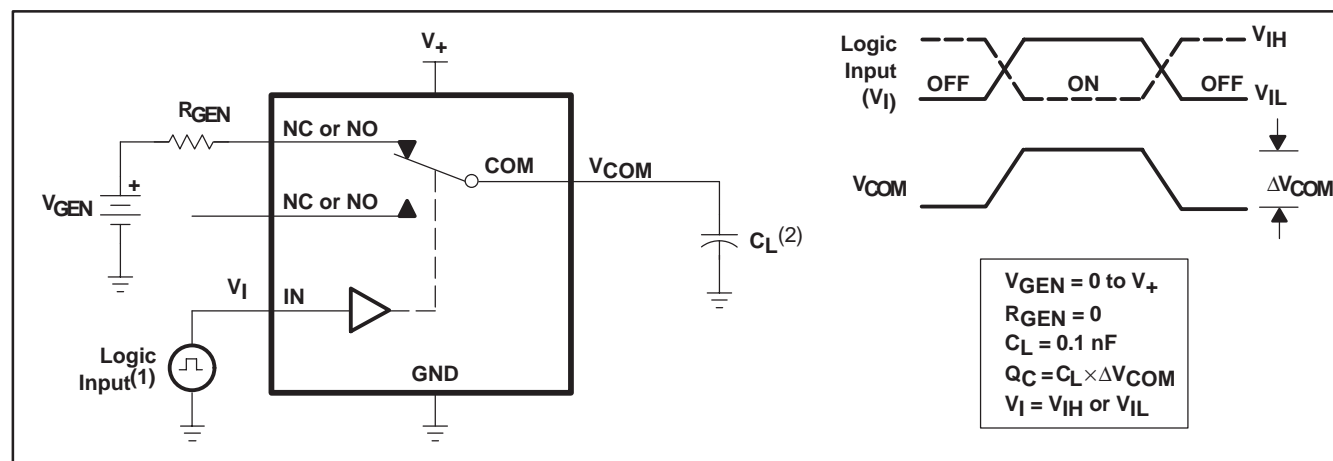

- (1) All input pulses are supplied by generators having the following characteristics: PRR ≤ 10 MHz, Z<sub>O</sub> = 50 Ω, t<sub>r</sub> < 5 ns, t<sub>f</sub> < 5 ns.  
(2) C<sub>L</sub> includes probe and jig capacitance.

**Figure 20. Charge Injection (Q<sub>C</sub>)**

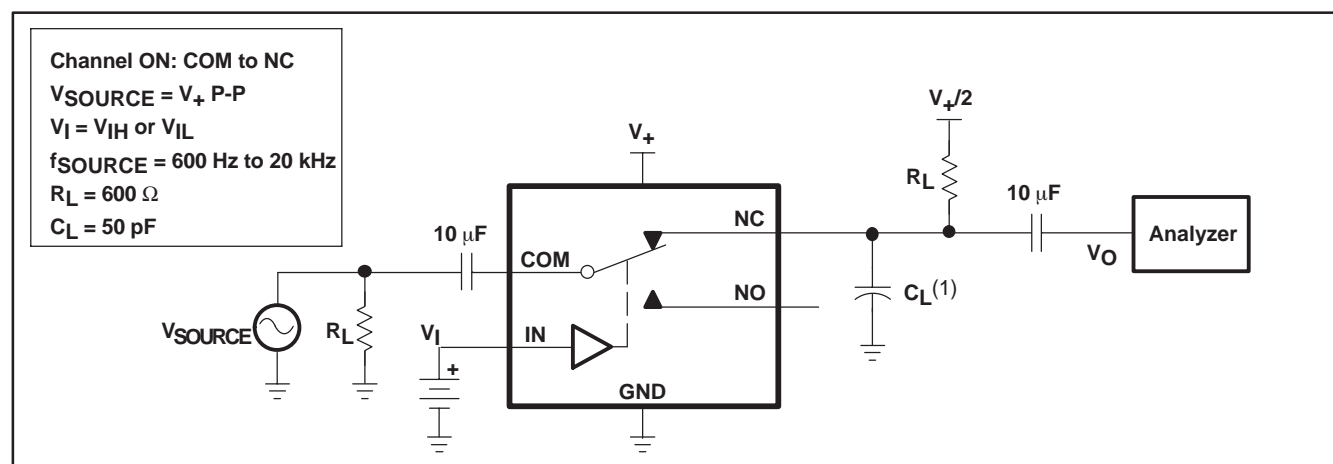

- (1) C<sub>L</sub> includes probe and jig capacitance.

**Figure 21. Total Harmonic Distortion (THD)**

**PACKAGING INFORMATION**

| Orderable Device | Status <sup>(1)</sup> | Package Type | Package Drawing | Pins | Package Qty | Eco Plan <sup>(2)</sup> | Lead/Ball Finish | MSL Peak Temp <sup>(3)</sup> |
|------------------|-----------------------|--------------|-----------------|------|-------------|-------------------------|------------------|------------------------------|
| TS5A3159DBVR     | ACTIVE                | SOT-23       | DBV             | 6    | 3000        | Green (RoHS & no Sb/Br) | CU NIPDAU        | Level-1-260C-UNLIM           |
| TS5A3159DBVRE4   | ACTIVE                | SOT-23       | DBV             | 6    | 3000        | Green (RoHS & no Sb/Br) | CU NIPDAU        | Level-1-260C-UNLIM           |
| TS5A3159DBVRG4   | ACTIVE                | SOT-23       | DBV             | 6    | 3000        | Green (RoHS & no Sb/Br) | CU NIPDAU        | Level-1-260C-UNLIM           |
| TS5A3159DBVT     | ACTIVE                | SOT-23       | DBV             | 6    | 250         | Green (RoHS & no Sb/Br) | CU NIPDAU        | Level-1-260C-UNLIM           |
| TS5A3159DBVTE4   | ACTIVE                | SOT-23       | DBV             | 6    | 250         | Green (RoHS & no Sb/Br) | CU NIPDAU        | Level-1-260C-UNLIM           |
| TS5A3159DBVTG4   | ACTIVE                | SOT-23       | DBV             | 6    | 250         | Green (RoHS & no Sb/Br) | CU NIPDAU        | Level-1-260C-UNLIM           |
| TS5A3159DCKR     | ACTIVE                | SC70         | DCK             | 6    | 3000        | Green (RoHS & no Sb/Br) | CU NIPDAU        | Level-1-260C-UNLIM           |
| TS5A3159DCKRE4   | ACTIVE                | SC70         | DCK             | 6    | 3000        | Green (RoHS & no Sb/Br) | CU NIPDAU        | Level-1-260C-UNLIM           |
| TS5A3159DCKRG4   | ACTIVE                | SC70         | DCK             | 6    | 3000        | Green (RoHS & no Sb/Br) | CU NIPDAU        | Level-1-260C-UNLIM           |
| TS5A3159DCKT     | ACTIVE                | SC70         | DCK             | 6    | 250         | Green (RoHS & no Sb/Br) | CU NIPDAU        | Level-1-260C-UNLIM           |
| TS5A3159DCKTE4   | ACTIVE                | SC70         | DCK             | 6    | 250         | Green (RoHS & no Sb/Br) | CU NIPDAU        | Level-1-260C-UNLIM           |
| TS5A3159DCKTG4   | ACTIVE                | SC70         | DCK             | 6    | 250         | Green (RoHS & no Sb/Br) | CU NIPDAU        | Level-1-260C-UNLIM           |

<sup>(1)</sup> The marketing status values are defined as follows:

**ACTIVE:** Product device recommended for new designs.

**LIFEBUY:** TI has announced that the device will be discontinued, and a lifetime-buy period is in effect.

**NRND:** Not recommended for new designs. Device is in production to support existing customers, but TI does not recommend using this part in a new design.

**PREVIEW:** Device has been announced but is not in production. Samples may or may not be available.

**OBSOLETE:** TI has discontinued the production of the device.

<sup>(2)</sup> Eco Plan - The planned eco-friendly classification: Pb-Free (RoHS), Pb-Free (RoHS Exempt), or Green (RoHS & no Sb/Br) - please check <http://www.ti.com/productcontent> for the latest availability information and additional product content details.

**TBD:** The Pb-Free/Green conversion plan has not been defined.

**Pb-Free (RoHS):** TI's terms "Lead-Free" or "Pb-Free" mean semiconductor products that are compatible with the current RoHS requirements for all 6 substances, including the requirement that lead not exceed 0.1% by weight in homogeneous materials. Where designed to be soldered at high temperatures, TI Pb-Free products are suitable for use in specified lead-free processes.

**Pb-Free (RoHS Exempt):** This component has a RoHS exemption for either 1) lead-based flip-chip solder bumps used between the die and package, or 2) lead-based die adhesive used between the die and leadframe. The component is otherwise considered Pb-Free (RoHS compatible) as defined above.

**Green (RoHS & no Sb/Br):** TI defines "Green" to mean Pb-Free (RoHS compatible), and free of Bromine (Br) and Antimony (Sb) based flame retardants (Br or Sb do not exceed 0.1% by weight in homogeneous material)

<sup>(3)</sup> MSL, Peak Temp. -- The Moisture Sensitivity Level rating according to the JEDEC industry standard classifications, and peak solder temperature.

**Important Information and Disclaimer:** The information provided on this page represents TI's knowledge and belief as of the date that it is provided. TI bases its knowledge and belief on information provided by third parties, and makes no representation or warranty as to the accuracy of such information. Efforts are underway to better integrate information from third parties. TI has taken and continues to take reasonable steps to provide representative and accurate information but may not have conducted destructive testing or chemical analysis on incoming materials and chemicals. TI and TI suppliers consider certain information to be proprietary, and thus CAS numbers and other limited information may not be available for release.



In no event shall TI's liability arising out of such information exceed the total purchase price of the TI part(s) at issue in this document sold by TI to Customer on an annual basis.

**OTHER QUALIFIED VERSIONS OF TS5A3159 :**

- Enhanced Product: [TS5A3159-EP](#)

NOTE: Qualified Version Definitions:

- Enhanced Product - Supports Defense, Aerospace and Medical Applications

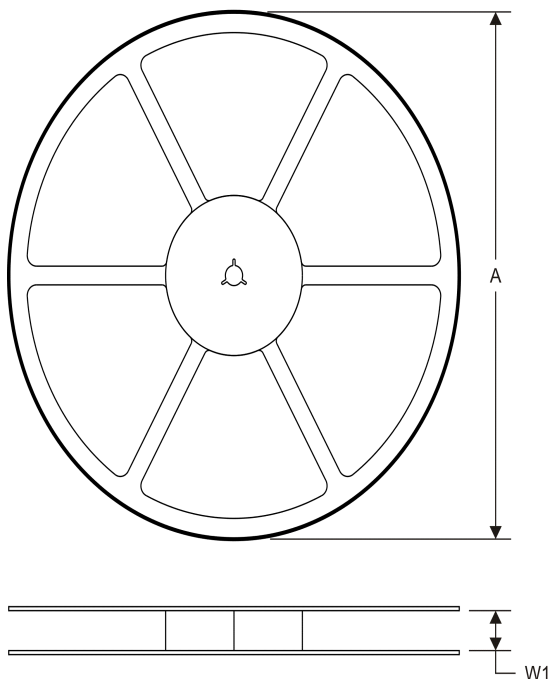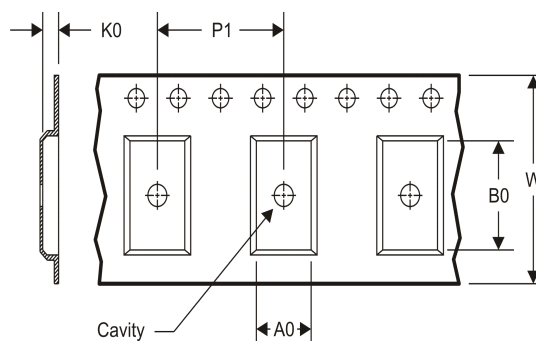**TAPE AND REEL INFORMATION**
**REEL DIMENSIONS**

**TAPE DIMENSIONS**


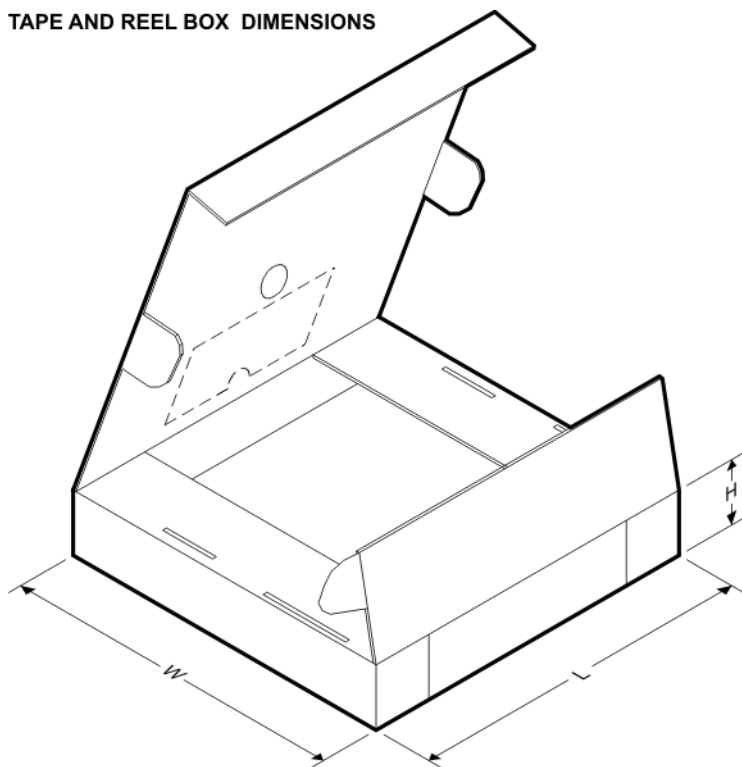
|    |   |
|----|---|
| A0 | Dimension designed to accommodate the component width     |
| B0 | Dimension designed to accommodate the component length    |
| K0 | Dimension designed to accommodate the component thickness |
| W  | Overall width of the carrier tape                         |
| P1 | Pitch between successive cavity centers                   |

**TAPE AND REEL INFORMATION**

\*All dimensions are nominal

| Device       | Package Type | Package Drawing | Pins | SPQ  | Reel Diameter (mm) | Reel Width W1 (mm) | A0 (mm) | B0 (mm) | K0 (mm) | P1 (mm) | W (mm) | Pin1 Quadrant |
|--------------|--------------|-----------------|------|------|--------------------|--------------------|---------|---------|---------|---------|--------|---------------|
| TS5A3159DBVR | SOT-23       | DBV             | 6    | 3000 | 180.0              | 9.2                | 3.17    | 3.23    | 1.37    | 4.0     | 8.0    | Q3            |
| TS5A3159DBVT | SOT-23       | DBV             | 6    | 250  | 180.0              | 9.2                | 3.17    | 3.23    | 1.37    | 4.0     | 8.0    | Q3            |
| TS5A3159DCKR | SC70         | DCK             | 6    | 3000 | 180.0              | 9.2                | 2.3     | 2.55    | 1.2     | 4.0     | 8.0    | Q3            |
| TS5A3159DCKT | SC70         | DCK             | 6    | 250  | 180.0              | 9.2                | 2.3     | 2.55    | 1.2     | 4.0     | 8.0    | Q3            |

## TAPE AND REEL BOX DIMENSIONS




\*All dimensions are nominal

| Device       | Package Type | Package Drawing | Pins | SPQ  | Length (mm) | Width (mm) | Height (mm) |
|--------------|--------------|-----------------|------|------|-------------|------------|-------------|
| TS5A3159DBVR | SOT-23       | DBV             | 6    | 3000 | 205.0       | 200.0      | 33.0        |
| TS5A3159DBVT | SOT-23       | DBV             | 6    | 250  | 205.0       | 200.0      | 33.0        |
| TS5A3159DCKR | SC70         | DCK             | 6    | 3000 | 205.0       | 200.0      | 33.0        |
| TS5A3159DCKT | SC70         | DCK             | 6    | 250  | 205.0       | 200.0      | 33.0        |

## DBV (R-PDSO-G6)


## PLASTIC SMALL-OUTLINE PACKAGE

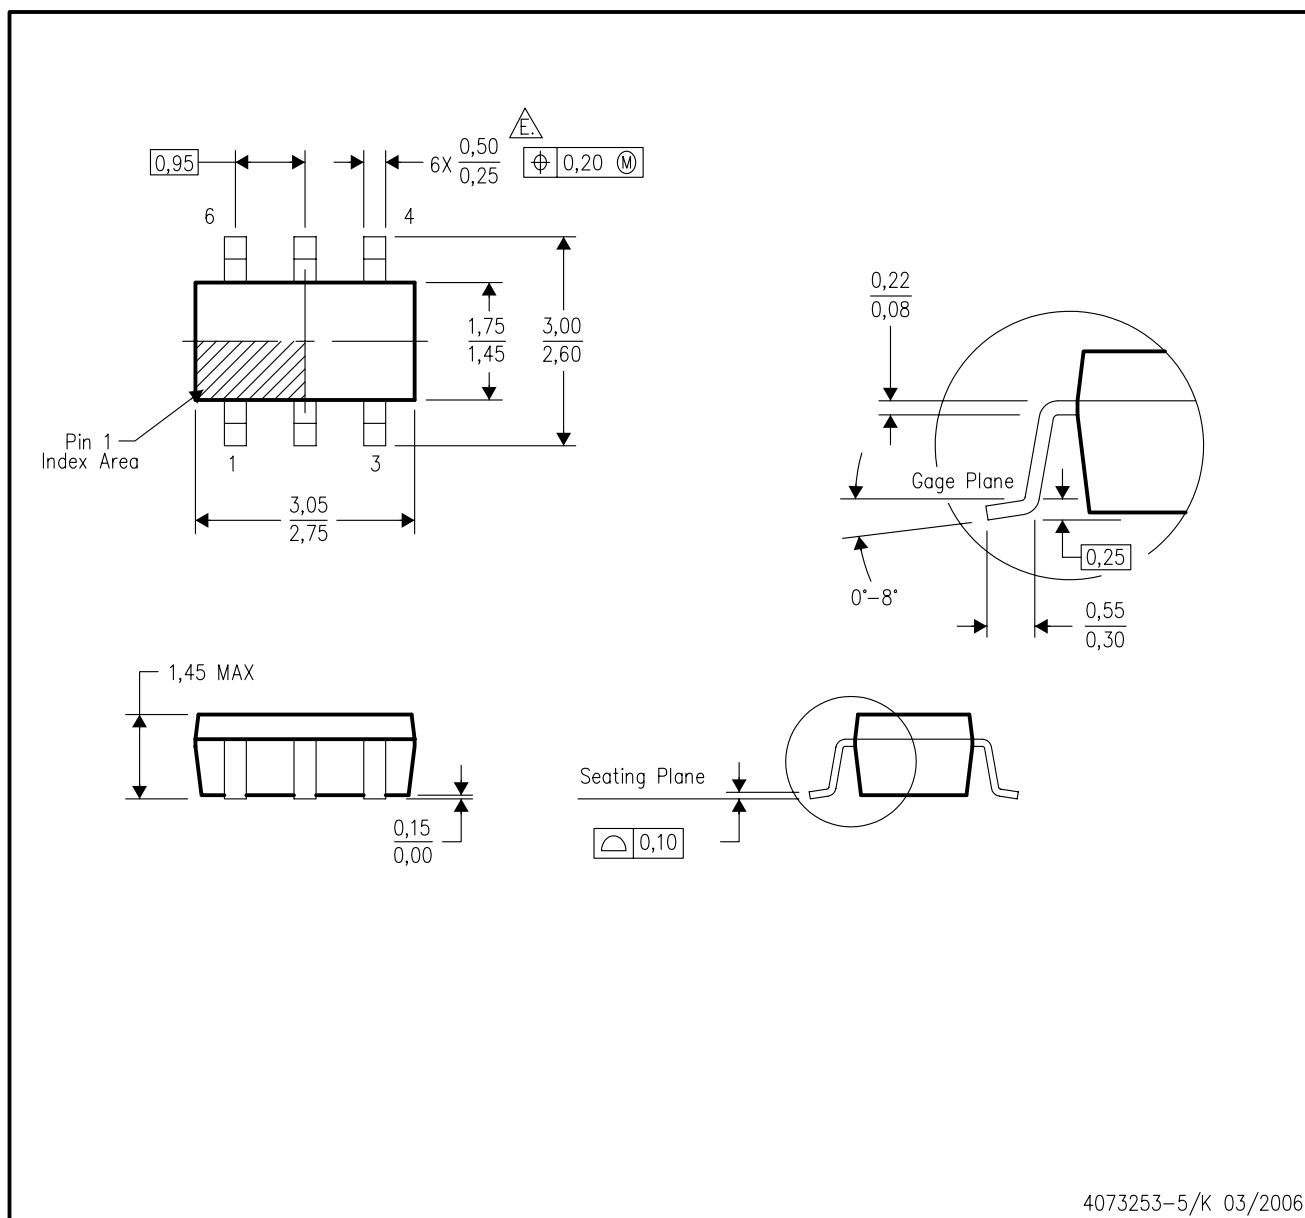

- NOTES:
- A. All linear dimensions are in millimeters.
  - B. This drawing is subject to change without notice.
  - C. Body dimensions do not include mold flash or protrusion. Mold flash and protrusion shall not exceed 0.15 per side.
  - D. Leads 1,2,3 may be wider than leads 4,5,6 for package orientation.
- Falls within JEDEC MO-178 Variation AB, except minimum lead width.

DBV (R-PDSO-G6)

PLASTIC SMALL OUTLINE

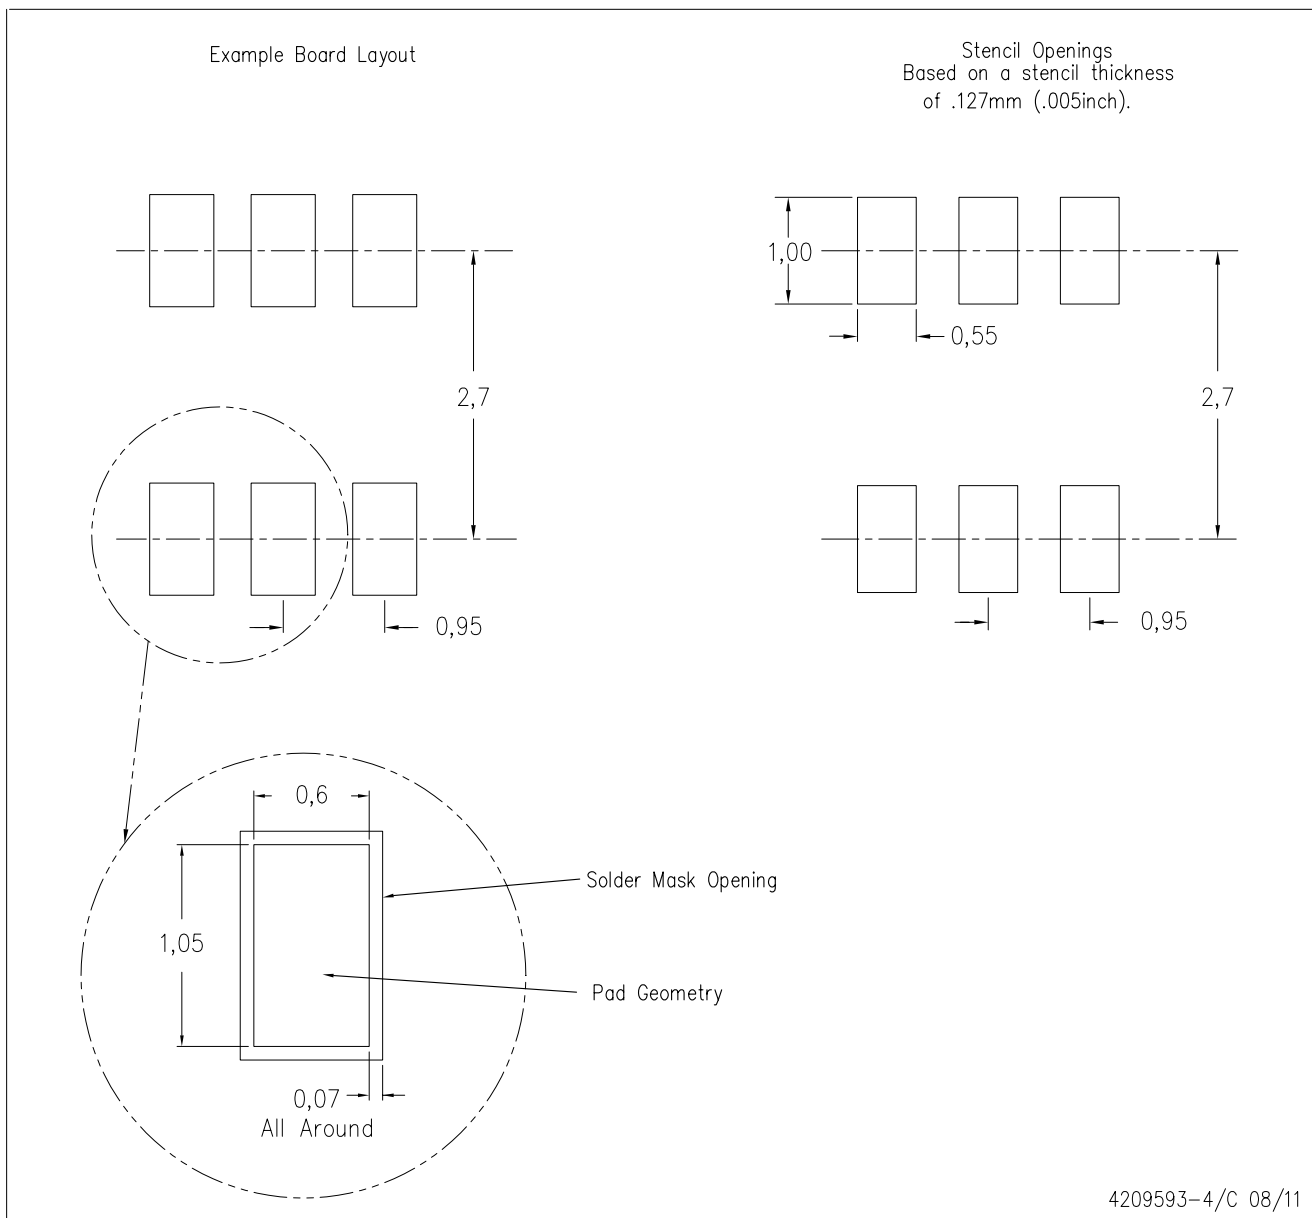


- NOTES:
- A. All linear dimensions are in millimeters.
  - B. This drawing is subject to change without notice.
  - C. Customers should place a note on the circuit board fabrication drawing not to alter the center solder mask defined pad.
  - D. Publication IPC-7351 is recommended for alternate designs.
  - E. Laser cutting apertures with trapezoidal walls and also rounding corners will offer better paste release. Customers should contact their board assembly site for stencil design recommendations. Example stencil design based on a 50% volumetric metal load solder paste. Refer to IPC-7525 for other stencil recommendations.



## DCK (R-PDSO-G6)

## PLASTIC SMALL-OUTLINE PACKAGE

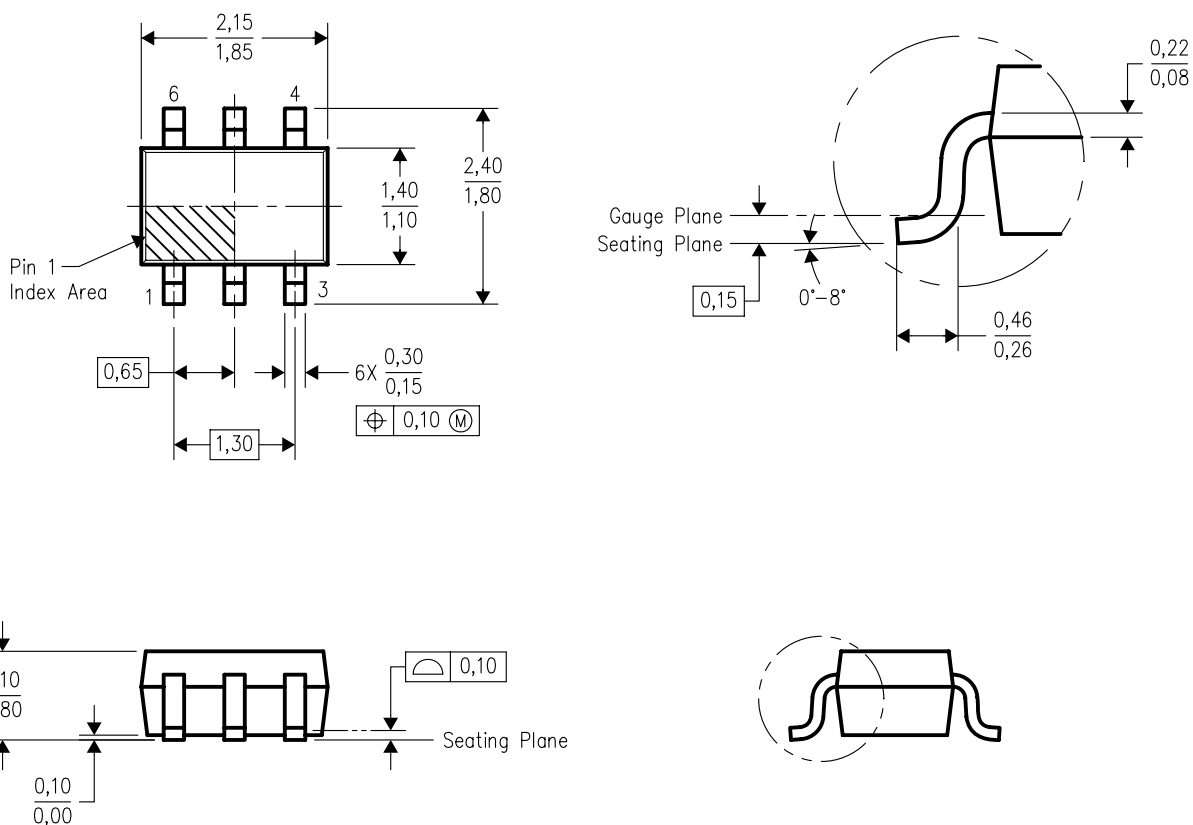


4093553-4/G 01/2007

- NOTES:
- All linear dimensions are in millimeters.
  - This drawing is subject to change without notice.
  - Body dimensions do not include mold flash or protrusion. Mold flash and protrusion shall not exceed 0.15 per side.
  - Falls within JEDEC MO-203 variation AB.

DCK (R-PDSO-G6)

PLASTIC SMALL OUTLINE

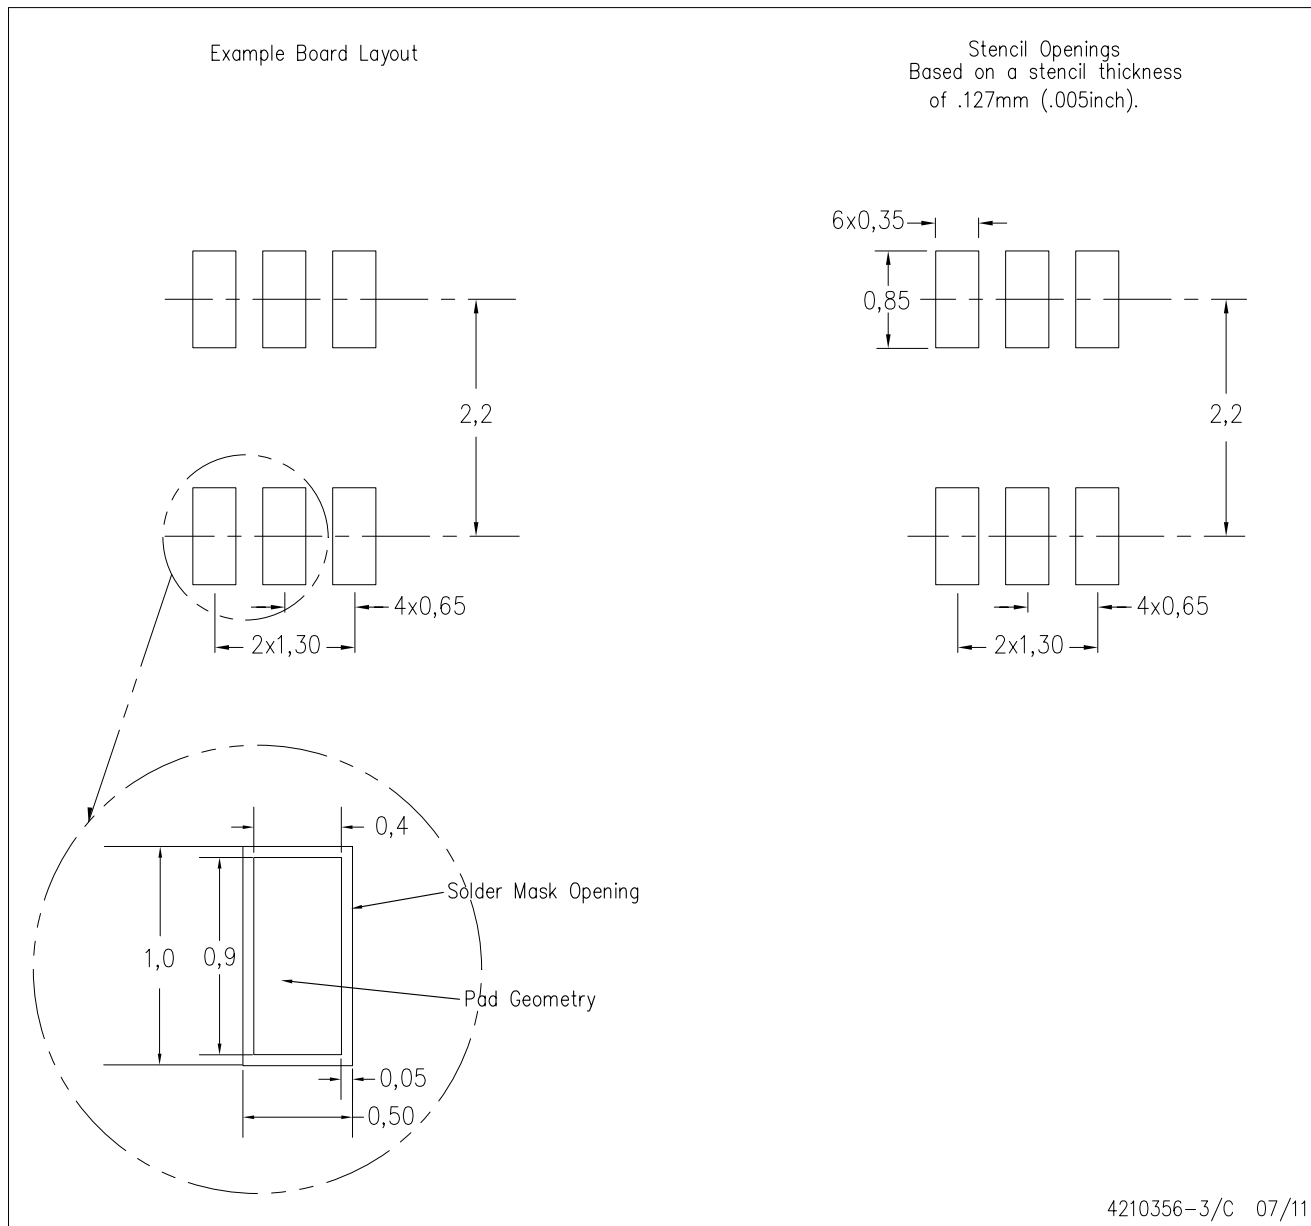

- NOTES:
- A. All linear dimensions are in millimeters.
  - B. This drawing is subject to change without notice.
  - C. Customers should place a note on the circuit board fabrication drawing not to alter the center solder mask defined pad.
  - D. Publication IPC-7351 is recommended for alternate designs.
  - E. Laser cutting apertures with trapezoidal walls and also rounding corners will offer better paste release. Customers should contact their board assembly site for stencil design recommendations. Example stencil design based on a 50% volumetric metal load solder paste. Refer to IPC-7525 for other stencil recommendations.

## IMPORTANT NOTICE

Texas Instruments Incorporated and its subsidiaries (TI) reserve the right to make corrections, enhancements, improvements and other changes to its semiconductor products and services per JESD46C and to discontinue any product or service per JESD48B. Buyers should obtain the latest relevant information before placing orders and should verify that such information is current and complete. All semiconductor products (also referred to herein as "components") are sold subject to TI's terms and conditions of sale supplied at the time of order acknowledgment.

TI warrants performance of its components to the specifications applicable at the time of sale, in accordance with the warranty in TI's terms and conditions of sale of semiconductor products. Testing and other quality control techniques are used to the extent TI deems necessary to support this warranty. Except where mandated by applicable law, testing of all parameters of each component is not necessarily performed.

TI assumes no liability for applications assistance or the design of Buyers' products. Buyers are responsible for their products and applications using TI components. To minimize the risks associated with Buyers' products and applications, Buyers should provide adequate design and operating safeguards.

TI does not warrant or represent that any license, either express or implied, is granted under any patent right, copyright, mask work right, or other intellectual property right relating to any combination, machine, or process in which TI components or services are used. Information published by TI regarding third-party products or services does not constitute a license to use such products or services or a warranty or endorsement thereof. Use of such information may require a license from a third party under the patents or other intellectual property of the third party, or a license from TI under the patents or other intellectual property of TI.

Reproduction of significant portions of TI information in TI data books or data sheets is permissible only if reproduction is without alteration and is accompanied by all associated warranties, conditions, limitations, and notices. TI is not responsible or liable for such altered documentation. Information of third parties may be subject to additional restrictions.

Resale of TI components or services with statements different from or beyond the parameters stated by TI for that component or service voids all express and any implied warranties for the associated TI component or service and is an unfair and deceptive business practice. TI is not responsible or liable for any such statements.

Buyer acknowledges and agrees that it is solely responsible for compliance with all legal, regulatory and safety-related requirements concerning its products, and any use of TI components in its applications, notwithstanding any applications-related information or support that may be provided by TI. Buyer represents and agrees that it has all the necessary expertise to create and implement safeguards which anticipate dangerous consequences of failures, monitor failures and their consequences, lessen the likelihood of failures that might cause harm and take appropriate remedial actions. Buyer will fully indemnify TI and its representatives against any damages arising out of the use of any TI components in safety-critical applications.

In some cases, TI components may be promoted specifically to facilitate safety-related applications. With such components, TI's goal is to help enable customers to design and create their own end-product solutions that meet applicable functional safety standards and requirements. Nonetheless, such components are subject to these terms.

No TI components are authorized for use in FDA Class III (or similar life-critical medical equipment) unless authorized officers of the parties have executed a special agreement specifically governing such use.

Only those TI components which TI has specifically designated as military grade or "enhanced plastic" are designed and intended for use in military/aerospace applications or environments. Buyer acknowledges and agrees that any military or aerospace use of TI components which have **not** been so designated is solely at the Buyer's risk, and that Buyer is solely responsible for compliance with all legal and regulatory requirements in connection with such use.

TI has specifically designated certain components which meet ISO/TS16949 requirements, mainly for automotive use. Components which have not been so designated are neither designed nor intended for automotive use; and TI will not be responsible for any failure of such components to meet such requirements.

### Products

|                        |  |
|------------------------|--|
| Audio                  | <a href="http://www.ti.com/audio">www.ti.com/audio</a>                               |
| Amplifiers             | <a href="http://amplifier.ti.com">amplifier.ti.com</a>                               |
| Data Converters        | <a href="http://dataconverter.ti.com">dataconverter.ti.com</a>                       |
| DLP® Products          | <a href="http://www.dlp.com">www.dlp.com</a>   |
| DSP                    | <a href="http://dsp.ti.com">dsp.ti.com</a>   |
| Clocks and Timers      | <a href="http://www.ti.com/clocks">www.ti.com/clocks</a>                             |
| Interface              | <a href="http://interface.ti.com">interface.ti.com</a>                               |
| Logic                  | <a href="http://logic.ti.com">logic.ti.com</a>                                       |
| Power Mgmt             | <a href="http://power.ti.com">power.ti.com</a>                                       |
| Microcontrollers       | <a href="http://microcontroller.ti.com">microcontroller.ti.com</a>                   |
| RFID                   | <a href="http://www.ti-rfid.com">www.ti-rfid.com</a>                                 |
| OMAP Mobile Processors | <a href="http://www.ti.com/omap">www.ti.com/omap</a>                                 |
| Wireless Connectivity  | <a href="http://www.ti.com/wirelessconnectivity">www.ti.com/wirelessconnectivity</a> |

### Applications

|                               |  |
|-------------------------------|--|
| Automotive and Transportation | <a href="http://www.ti.com/automotive">www.ti.com/automotive</a>                         |
| Communications and Telecom    | <a href="http://www.ti.com/communications">www.ti.com/communications</a>                 |
| Computers and Peripherals     | <a href="http://www.ti.com/computers">www.ti.com/computers</a>                           |
| Consumer Electronics          | <a href="http://www.ti.com/consumer-apps">www.ti.com/consumer-apps</a>                   |
| Energy and Lighting           | <a href="http://www.ti.com/energy">www.ti.com/energy</a>                                 |
| Industrial                    | <a href="http://www.ti.com/industrial">www.ti.com/industrial</a>                         |
| Medical                       | <a href="http://www.ti.com/medical">www.ti.com/medical</a>                               |
| Security                      | <a href="http://www.ti.com/security">www.ti.com/security</a>                             |
| Space, Avionics and Defense   | <a href="http://www.ti.com/space-avionics-defense">www.ti.com/space-avionics-defense</a> |
| Video and Imaging             | <a href="http://www.ti.com/video">www.ti.com/video</a>                                   |

**TI E2E Community** [e2e.ti.com](http://e2e.ti.com)