


● Features:

1. Lens Appearance : Water Clear.
2. 3.2x1.6x1.4mm (1206) standard package.
3. Suitable for all SMT assembly methods.
4. Compatible with infrared and vapor phase reflow solder process.
5. Compatible with automatic placement equipment.
6. This product doesn't contain restriction Substance, comply ROHS standard.

● Applications:

1. Remote Control.
2. Smoke Detector
3. Photo Detector
4. Automatic Control System

● Package Dimensions:

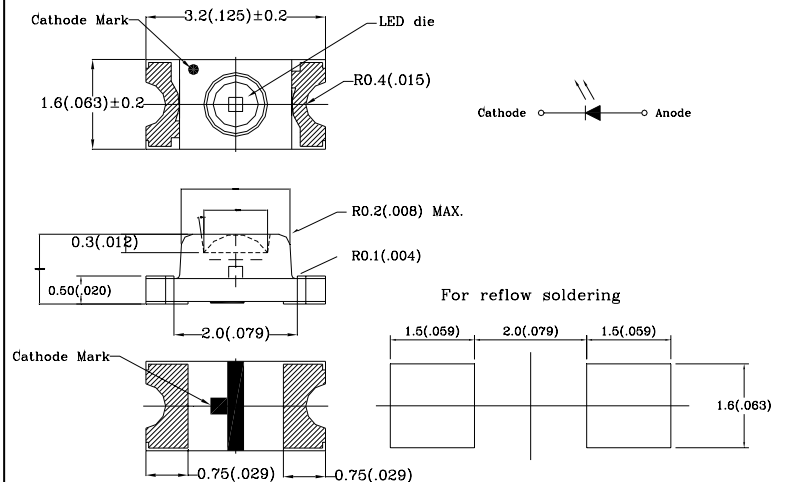

NOTES:

1. All dimensions are in millimeters (inches).
2. Tolerance is $\pm 0.10\text{mm}$ (0.004") unless otherwise specified.
3. Specifications are subject to change without notice.
4. Lead Spacing is measured where the leads emerge from the package.

● Absolute Maximum Ratings($T_a=25^\circ\text{C}$)







Parameter	Symbol	Rating	Unit
Power Dissipation	P_d	100	mW
Forward Current	I_F	50	mA
Peak Forward Current * 1	I_{FP}	500	mA
Reverse Voltage	V_R	5	V
Operating Temperature	T_{opr}	$-40^\circ\text{C} \sim 85^\circ\text{C}$	-
Storage Temperature	T_{stg}	$-40^\circ\text{C} \sim 85^\circ\text{C}$	-
Soldering Temperature	T_{sol}	See Page 6	-

* 1 Pulse Width = 10us, 1%Duty Cycle

● Electrical and optical characteristics(Ta=25°C)

Parameter	Symbol	Condition	Min.	Typ.	Max.	Unit
Radiant Intensity	I _e	I _F =50mA	3.8	8	-	mW/sr
Forward Voltage	V _F	I _F =50mA	-	1.3	1.8	V
Peak Wave Length	λ _p	I _F =20mA	-	850	-	nm
Spectral Line Half-width	Δλ	I _F =20mA	-	50	-	nm
Rise/Fall Time	T _r	I _{fp} =20mA PW=10uS DC=1%	-	500	-	ns
	T _f		-	200	-	
Viewing Angle	2θ _{1/2}	I _F =20mA	-	70	-	deg

● Typical Electro-Optical Characteristics Curves

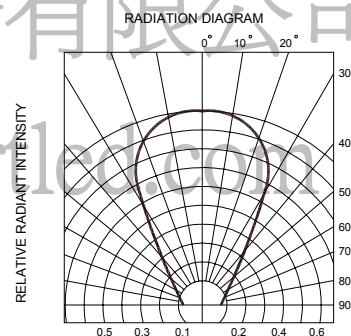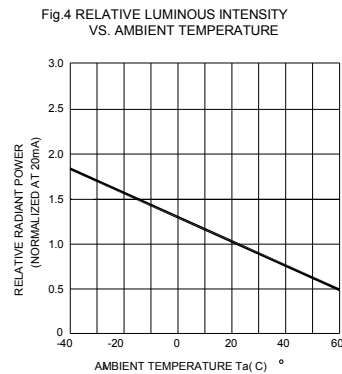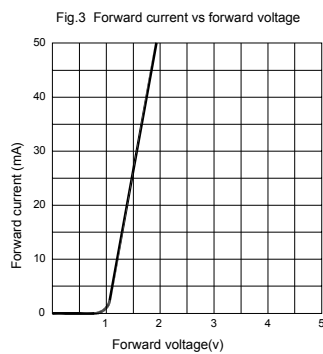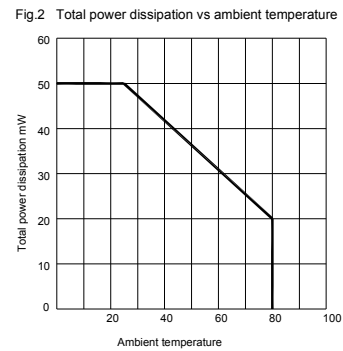

Technical drawing of a PCB assembly showing dimensions and components. The drawing includes a top view, a side view, and a detail view of a component.

Top View Dimensions:

- Overall width: 5.3 ± 0.05
- Overall length: 8.0 ± 0.3
- Distance from left edge to first component: 1.98 ± 0.1
- Distance between components: 4.0 ± 0.1
- Distance from last component to right edge: 1.5 ± 0.1
- Distance from bottom edge to component center line: 3.5 ± 0.05
- Distance from bottom edge to component center line (alternative): 1.75 ± 0.1
- Distance from bottom edge to component center line (alternative): 2.0 ± 0.05
- Distance from bottom edge to component center line (alternative): 4.0 ± 0.1

Side View Dimensions:

- Overall height: 1.46 ± 0.1
- Component height: 3.47 ± 0.1
- Component width: 0.3

Detail View Dimensions:

- Overall diameter: 71.0 ± 1
- Component diameter: 13.0 ± 0.5
- Component width: 13.0 ± 0.5
- Component height: 179 ± 1

Labels and Notes:

- USER DIRECTION OF FEED** (indicated by an arrow pointing left)
- START** (indicated by a dashed line)
- END** (indicated by a dashed line)
- Anode** (indicated by a circle with a dot)
- Cathode** (indicated by a circle with a cross)
- TRAILER** (indicated by a dashed line)
- LEADER** (indicated by a dashed line)
- FIXING TAPE** (indicated by a dashed line)
- NOTE: 3000 pcs PER REEL**

http://www.brtled.com

● Bin Limits

Intensity Bin Limits (At50mA)

BIN CODE	Min. (mcd)	Max. (mcd)
8	3.60	5.05
9	5.05	7.07
10	7.07	9.90
11	9.90	13.81

Tolerance for each Bin limit is $\pm 15\%$.

● BIN : x



佰鴻工業股份有限公司

<http://www.brtled.com>

● Reliability Test

Classification	Test Item	Reference Standard	Test Conditions	Result
Endurance Test	Operation Life	MIL-STD-750:1026 MIL-STD-883:1005 JIS C 7021 :B-1	Connect with a power $I_f=50\text{mA}$ T_a =Under room temperature Test time=1,000hrs	0/20
	High Temperature High Humidity Storage	MIL-STD-202:103B JIS C 7021 :B-11	$T_a=+65^\circ\text{C} \pm 5^\circ\text{C}$ RH=90%-95% Test time=240hrs	0/20
	High Temperature Storage	MIL-STD-883:1008 JIS C 7021 :B-10	High $T_a=+85^\circ\text{C} \pm 5^\circ\text{C}$ Test time=1,000hrs	0/20
	Low Temperature Storage	JIS-C-7021 :B-12	Low $T_a=-40^\circ\text{C} \pm 5^\circ\text{C}$ Test time=1,000hrs	0/20
Environmental Test	Temperature Cycling	MIL-STD-202:107D MIL-STD-750:1051 MIL-STD-883:1010 JIS C 7021 :A-4	$-40^\circ\text{C} \sim +25^\circ\text{C} \sim +85^\circ\text{C} \sim +25^\circ\text{C}$ 60min 20min 60min 20min Test Time=5cycle	0/20
	Thermal Shock	MIL-STD-202:107D MIL-STD-750:1051 MIL-STD-883:1011	$-40^\circ\text{C} \pm 5^\circ\text{C} \sim +85^\circ\text{C} \pm 5^\circ\text{C}$ 20min 20min Test Time=10cycle	0/20
	Solder Resistance	MIL-STD-202:201A MIL-STD-750:2031 JIS C 7021 :A-1	Preheating : $140^\circ\text{C} - 160^\circ\text{C}$, within 2 minutes. Operation heating : 260°C (Max.), within 10seconds. (Max.)	0/20

● Judgment criteria of failure for the reliability

Measuring items	Symbol	Measuring conditions	Judgment criteria for failure
Collector Dark Current	I_d	$V_{CE}=20\text{V}$, $H=1.0 \text{ mW/cm}^2$	Over U_{x2}
Collector Light Current	I_{SC}	$V_{CE}=5\text{V}$, $H=1.0 \text{ mW/cm}^2$	Below $SX0.5$

Note: 1.U means the upper limit of specified characteristics. S means initial value.

2.Measurment shall be taken between 2 hours and after the test pieces have been returned to normal ambient conditions after completion of each test.

● Soldering :

1. Manual Of Soldering


The temperature of the iron tip should not be higher than 300°C (572°F) and Soldering within 3 seconds per solder-land is to be observed.

2. Reflow Soldering

Preheating : 140°C ~ 160°C ± 5°C, within 2 minutes.

Operation heating : 260°C (Max.) within 10 seconds. (Max)

Gradual Cooling (Avoid quenching).

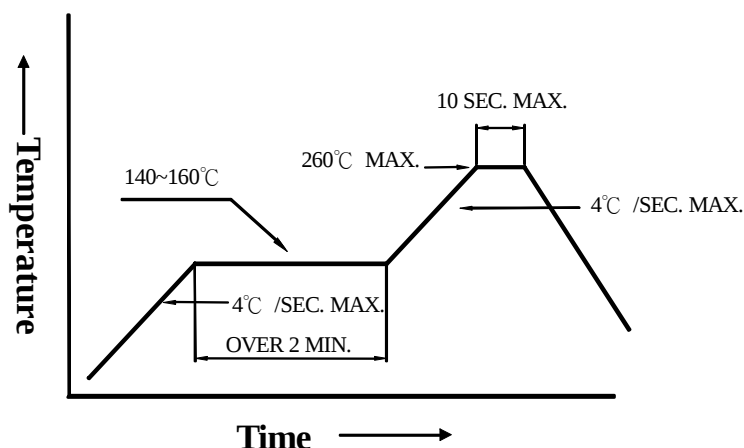


3. DIP soldering (Wave Soldering) :

Preheating : 120°C ~ 150°C, within 120 ~ 180 sec.

Operation heating : 245°C ± 5°C within 5 sec. 260°C (Max)

Gradual Cooling (Avoid quenching).

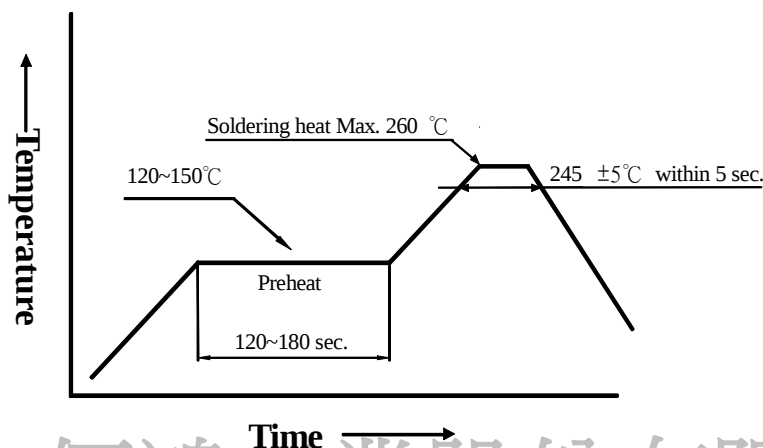

● Handling :

Care must be taken not to cause to the epoxy resin portion of BRIGHT LEDs while it is exposed to high temperature.

Care must be taken not rub the epoxy resin portion of BRIGHT LEDs with hard or sharp article such as the sand blast and the metal hook.

● Notes for designing:

Care must be taken to provide the current limiting resistor in the circuit so as to drive the BRIGHT LEDs within the rated figures. Also, caution should be taken not to overload BRIGHT LEDs with instantaneous voltage at the turning ON and OFF of the circuit.

When using the pulse drive care must be taken to keep the average current within the rated figures. Also, the circuit should be designed so as to be subjected to reverse voltage when turning off the BRIGHT LEDs.

● Storage:

In order to avoid the absorption of moisture, it is recommended to solder BRIGHT LEDs as soon as possible after unpacking the sealed envelope.

If the envelope is still packed, to store it in the environment as following:

- (1) Temperature : 5°C -30°C (41°F) Humidity : RH 60% Max.
- (2) After this bag is opened, devices that will be applied to infrared reflow, vapor-phase reflow, or equivalent soldering process must be:
 - a. Completed within 168 hours.
 - b. Stored at less than 30% RH.
- (3) Devices require baking before mounting, if:
 - (2) a or (2) b is not met.
- (4) If baking is required, devices must be baked under below conditions:
 - 48 hours at 60°C±3°C.

● Package and Label of Products:

- (1) Package: Products are packed in one bag of 3000 pcs (one taping reel) and a label is attached on each bag.
- (2) Label:



佰鴻工業股份有限公司
BRIGHT LED ELECTRONICS CORP.

Part No.: BL-Hxxxxx-TRB



Quantity: xxxx BIN: x




Sealing date: xxxxx



← BRIGHT LED LOGO

← Part No.

← Quantity
← BIN.

← Sealing Date

← x xx xx xx
Year Month Day

← Manufacture Location

<http://www.brtled.com>