




This document is the property of and embodies CONFIDENTIAL and PROPRIETARY information of FCI. No part of the information shown on this document may be used in any way or disclosed to others without the written consent of FCI. Copyright FCI.


PRODUCT No.	RECOMMENDED PCB THICKNESS	TYPE OF CLIP	DIM 'A'	PACKAGING
I0036587-001LF	1.60	METAL BLADE	2.60	TRAY
I0036587-001TRLF				TAPE & REEL
I0036587-002LF	1.60	FORK LOCK	2.40	TRAY
I0036587-002TRLF				TAPE & REEL
I0036587-003LF	1.60	METAL BLADE	2.60	TRAY
I0036587-003TRLF				TAPE & REEL
I0036587-004LF	2.60	METAL BLADE	3.60	TRAY







I0036587-001LF

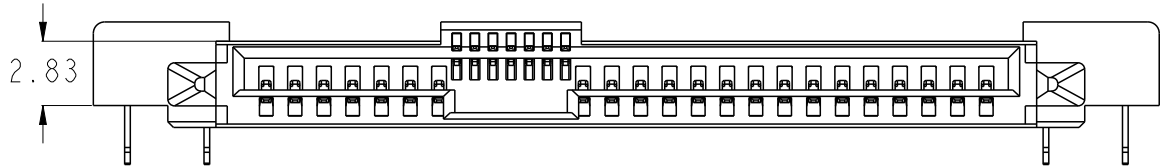

I0036587-002LF

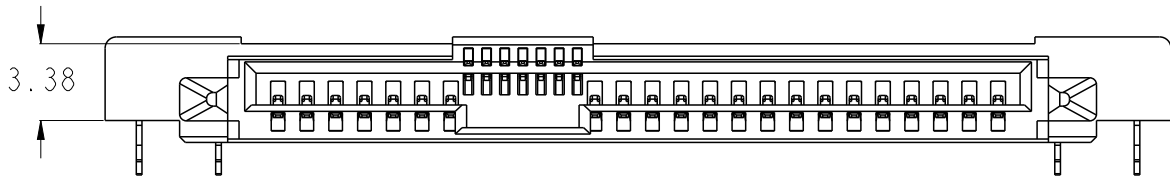

I0036587-003LF
I0036587-004LF

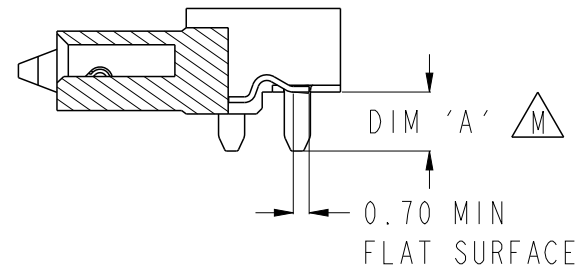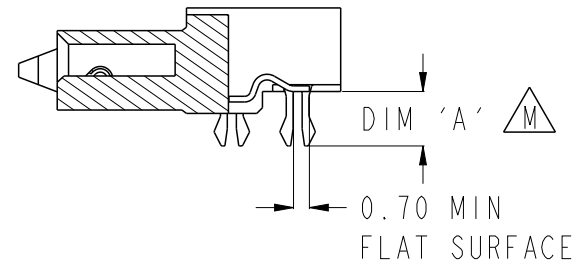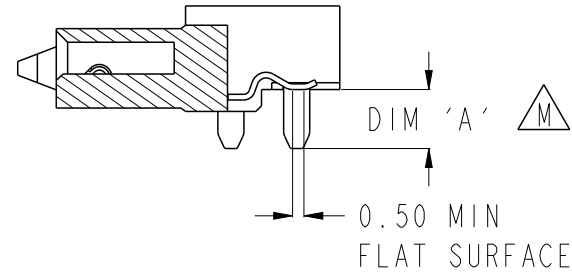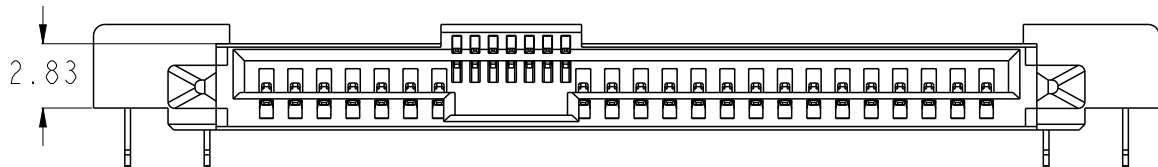

UNSPECIFIED DIMENSIONS PLEASE REFER TO PAGE 1 & 2


tolerance std	material	-	dr	wcadmin	2006/03/08	projection 	MM 	size	A3	scale	1:1
	mat code	-	eng	Koon-Poh Tay	2012/04/03			ecn no		ELX-S-010975-1	
	heattreat	-	chr	-	-			rel level		Released	
ASME Y14.5	plating/finish	-	appr	Chen-Hong Tan	2012/04/03	product family		-			
surface ✓	spec ref			title	SAS RECEPTACLE R/A SMT ASSY		dwg no	10036587		rev	M
	model name									I0036587-PCBA-ALT	
	model revision									B	
ASME Y14.5			www.fci.com	cat. no.	-	Product - Customer Drw			sheet 2 of 3		

FCI CONFIDENTIAL





This document is the property of and embodies CONFIDENTIAL and PROPRIETARY information of FCI. No part of the information shown on this document may be used in any way or disclosed to others without the written consent of FCI. Copyright FCI.

PRODUCT No.
SEE TABLE

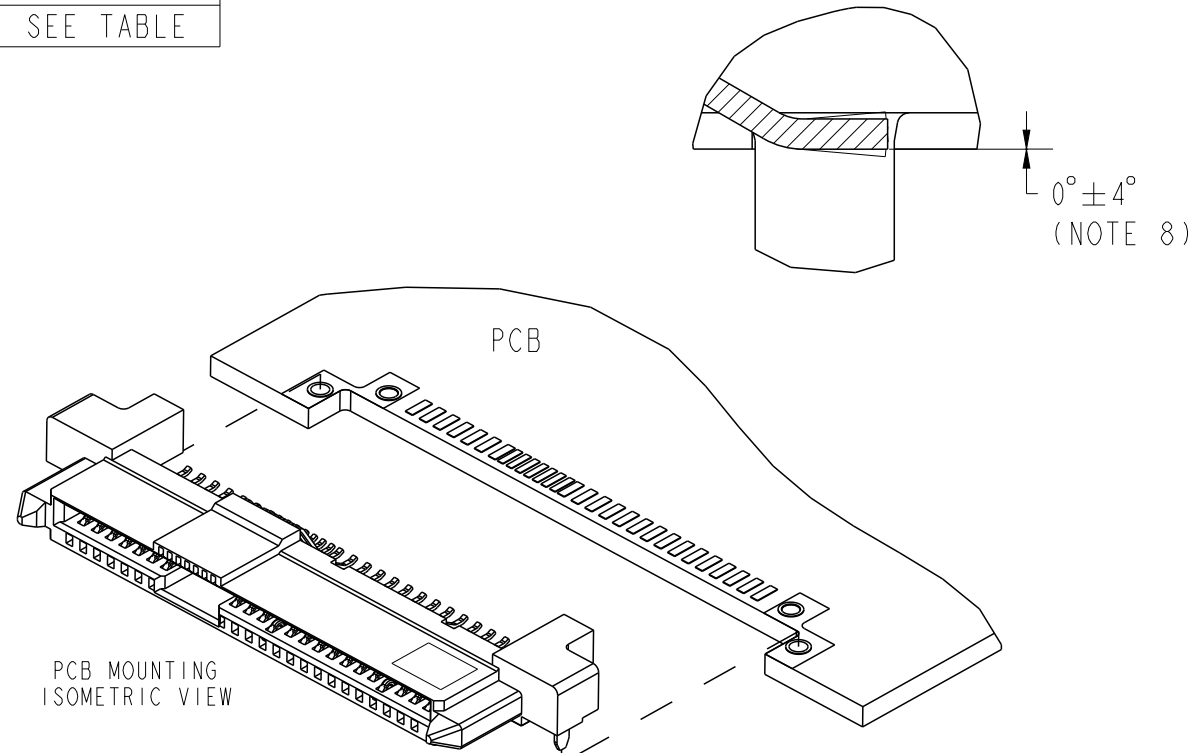


- NOTES:-
- MATERIAL:
1) HOUSING : HIGH TEMP. THERMOPLASTIC, 94V-0, COLOR: BLACK
2) TERMINAL : COPPER ALLOY
3) HOLD DOWN: COPPER ALLOY
 - FINISH:
1) TERMINAL : 30u" Au PLATING (CONTACT PONT) OVER 50u" MIN NICKEL
2) SOLDER TAIL: 100u" MIN TIN OVER 50u" MIN NICKEL
3) HOLD DOWN : 100u" MIN TIN OVER 50u" MIN NICKEL
 - PACKAGING:
a) 10036587-XXXLF : REFER TO STANDARD PACKAGING IN TRAY
b) 10036587-XXXTRLF: REFER TO TAPE AND REEL PACKAGING
 - THE HOUSING WILL WITHSTAND EXPOSURE TO 260 DEGREES CELSIUS PEAK TEMPERATURE FOR 10 SECONDS IN A CONVECTION, INFRE-RED OR VAPOUR PHASE REFLOW OVEN
 - THIS PRODUCT MEETS EUROPEAN UNION DIRECTIVES AND OTHER COUNTRY REGULATIONS AS DESCRIBED IN GS-22-008
 - PART NUMBERS ENDING IN 'LF' MEANS FOR NOTE 5 LEAD FREE IDENTIFICATION, P/N XXXXXXXXX-XXXLF IS EQUIVALENT TO PREVIOUS P/N XXXXXXXXX-XXX
 - ALL SOLDER TAIL TO BE WITHIN 0.10mm, MAX COPLANARITY.
 - ALL SOLDER TAILS ANGLE CONTROL SHALL BE 0° ±4° AND APPLIED TO P/n 10036587-XXXLF.
 - A SYMBOL BE NEXT TO ANY DIMENSION, VIEW, OR NOTE WHICH HAS BEEN MODIFIED WITH THE CURRENT DRAWING REVISION.

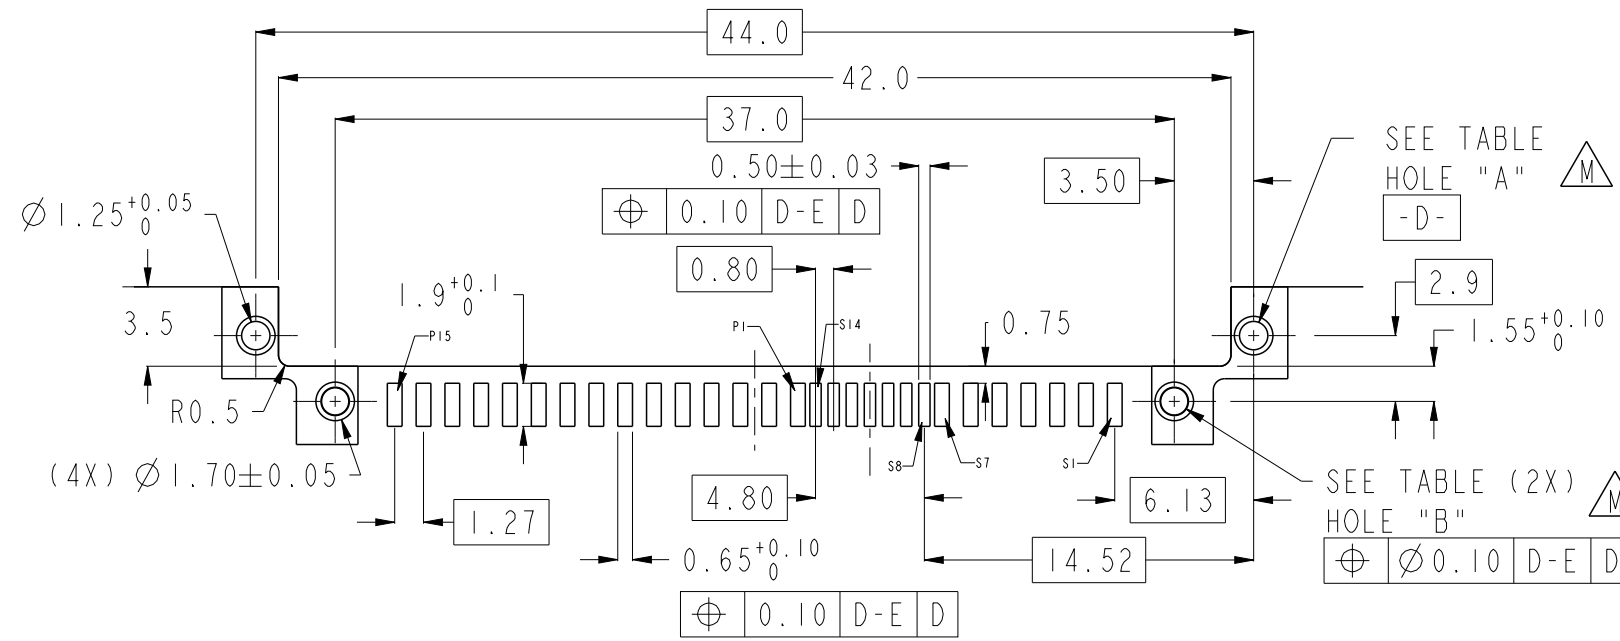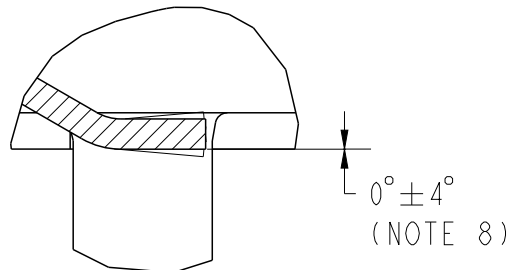

RECOMMENDED PCB LAYOUT
RECOMMENDED PCB T: 1.6mm
TOLERANCE UNLESS OTHERWISE: ±0.1

	HOLE "A"	HOLE "B"	REMARKS
RECOMMENDED 1	Ø1.25 +0.05/-0	Ø1.20 +0.05/-0	STD
RECOMMENDED 2	Ø1.20 ±0.05	Ø1.20 ±0.05	CUSTOMISE

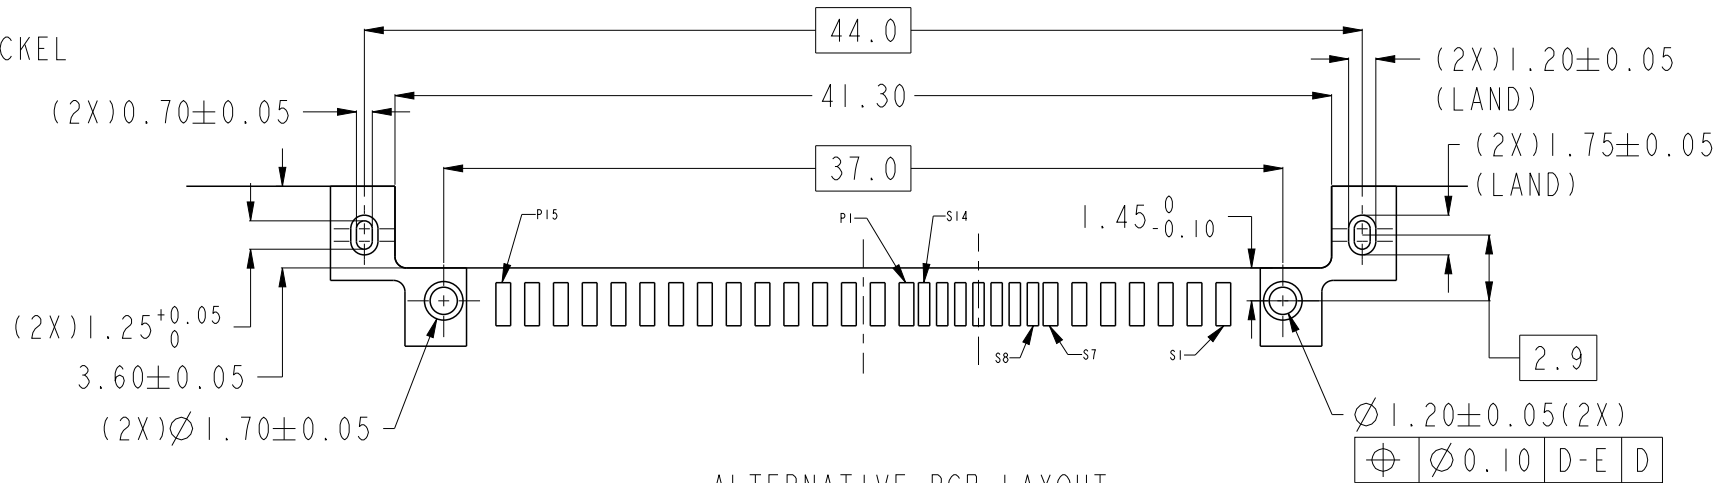

ALTERNATIVE PCB LAYOUT
REFER TO ABOVE RECOMMENDED PCB LAYOUT FOR UNSPECIFIED DIMENSIONS
RECOMMENDED PCB T: 1.6mm
TOLERANCE UNLESS OTHERWISE: ±0.1

tolerance std	material	-	dr	wcadmin	2006/03/08	projection 	size A3	scale 1:1
	mat code	-	eng	Koon-Poh Tay	2012/04/03			
	heattreat	-	chr	-	-			
	plating/finish	-	appr	Chen-Hong Tan	2012/04/03	product family	-	ecn no ELX-S-010975-1
ASME Y14.5	surface	✓	model name	10036587-PCBA-ALT	www.fci.com		rel level	Released
ASME Y14.5	spec ref		model revision	B	SAS RECEPTACLE R/A SMT ASSY		dwg no	10036587
					cat. no.		rev	M
Product - Customer Drw					sheet 3 of 3			