



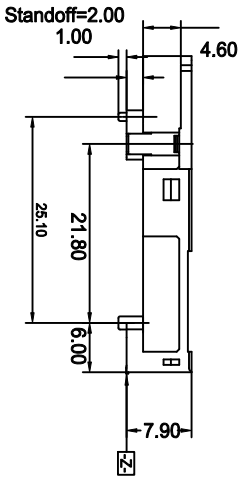

B

A

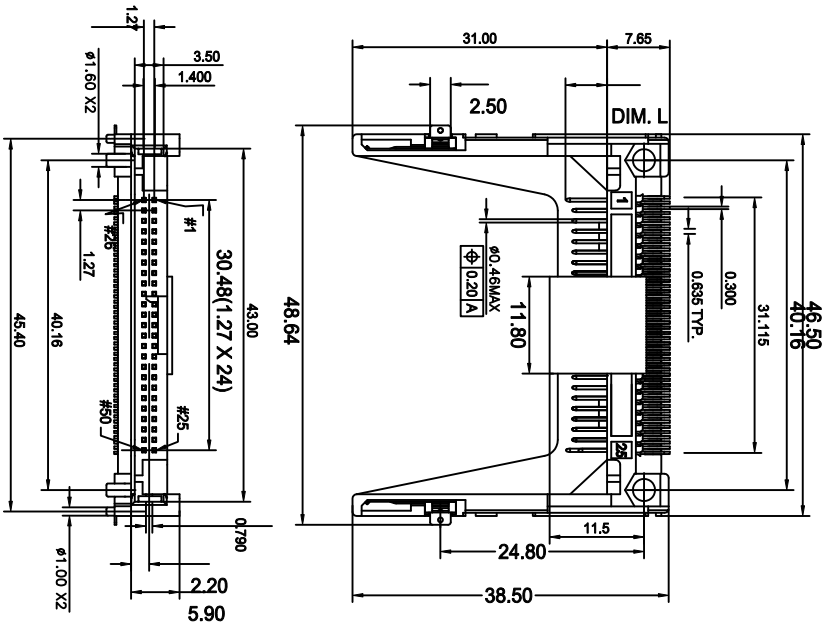

PIN NUMBER	DIM. L±0.15
25,26	3.50
ALL OTHER PINS	4.25
1, 13, 38, 50	5.00

- NOTES :
- MATERIAL :  
INSULATOR : HIGH TEMPERATURE THERMOPLASTIC  
FLAMMABILITY RATING: UL94V-0  
COLOR: IVORY  
CONTACT : COPPER ALLOY  
GROUND MOUNTING EAR: COPPER ALLOY  
PICK-UP CAP: HIGH TEMP. THERMOPLASTIC. UL 94 V-0
  - PLATING :  
CONTACT AREA: SELECTIVE GOLD (SEE P/N DESCRIPTION)  
UNDER PLATING: 50u" NICKEL OVERALL  
SOLDER TAIL AREA: 100u" TIN/LEAD OR 100u" MATTE TIN  
GROUND MOUNT EAR AREA: 100u" TIN/LEAD OR 100u" MATTE TIN
  - SOLDERTAILS TO BE WITHIN 0.05 UPWARD  
AND 0.2 DOWNWARD FROM Z-DATUM PLACE,  
AND COPLANARITY OF SOLDER TAILS TO BE  
WITHIN 0.10mm.
  - PRODUCT SPEC: GS-12-240.
  - PACKAGING SPEC: GS-14-980.

mat'l. code		tolerances unless otherwise specified		CUSTOMER COPY		FCI		www.fciconnect.com	
ltr	ecn no	dr	date	linear	projection	scale	product family	code	
A	106-0098	A.C	6/14/06	.XX ± 0.30	MM	NA	CF	TWN	
B	109-1027	S.LIN	03/05/09	.XXX ± 0.10					
C	109-1053	S.LIN	04/13/09	0° ± 2°					
		dr	allen chang	12/16/05					
		engr	allen chang	12/16/05					
		chr	sterling lin	12/16/05					
		appr	H. C. LIU	12/16/05					
sheet	revision	1	C	2					
index	sheet	1	2						

ACAD

1 | 2

3

code code

4

3

4

A

PDM: Rev:C

STATUS:Released

Printed: Apr 15, 2009

