






1

2

3


4

REV	DESCRIPTION	REV'D BY	DATE
M	REDRAWN ECR S20252	ERIC C.	08/09/92
N	ECR S60061	BC LOH	08MAR.96
P	ECR S80059	BC LOH	09MAR.98
R	ECR V80855	R.MARSHALL	15JUN.98
S	ECR V91508	B.BRUBAKER	18NOV.99
T	ECR S00022	BC LOH	26JAN.00
U	ECR V10424	B.BRUBAKER	12FEB.01
V	ECR N05-0002	YS	06JAN.01
W	ECR N08-0074	MIAD SH	30APR.08

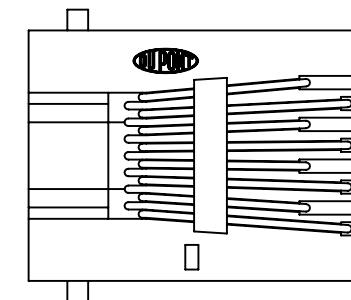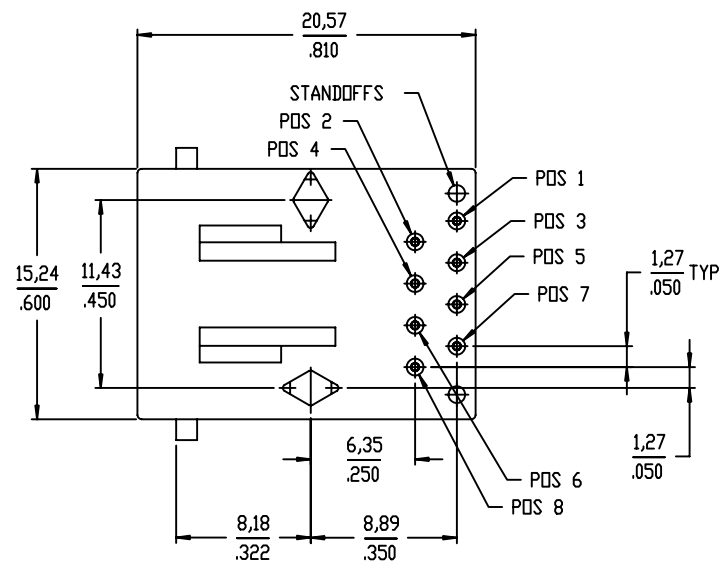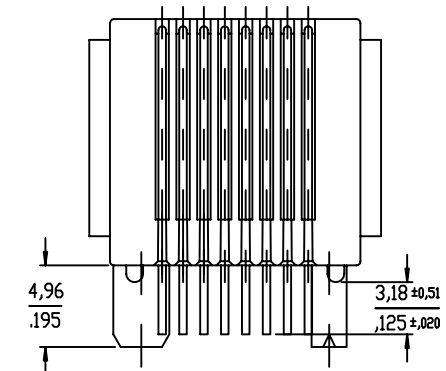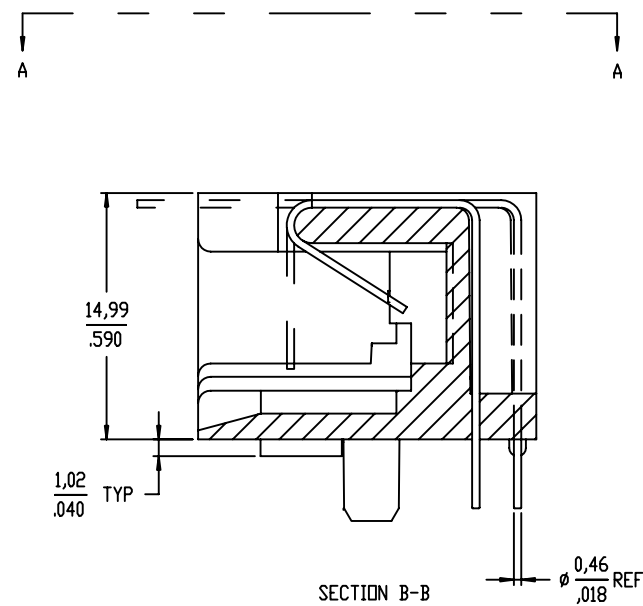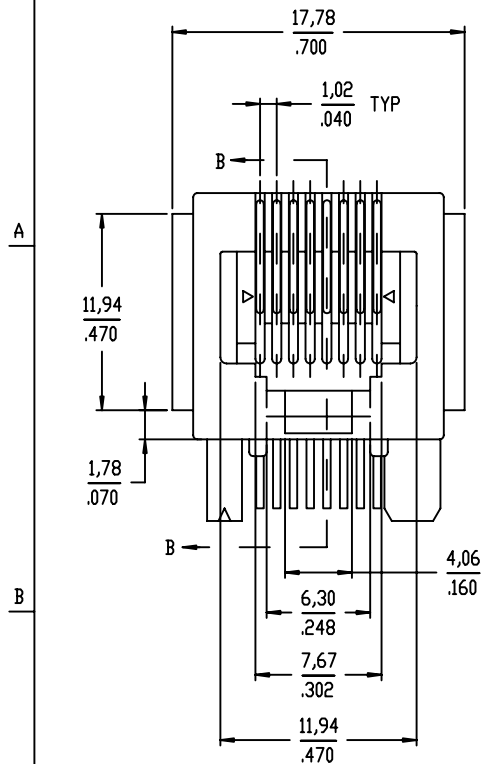

VIEW A-A

CUSTOMER COPY



GEN. TOLERANCES		DO NOT SCALE DWG.			
X.X ±0.3 / X.XX ±0.1 X.XX ±0.13 / X.XXX ±0.005 X.XXX ±0.051 / X.XXXX ±0.0020 ANGLES ± 2°0'					
				DESCRIPTION	
		NAME		DATE	
DRAWN		JANET		15JUN.98	
CHECKED		M CHENG		19FEB.01	
APPROVED		M CHENG		19FEB.01	
		PRODUCT NO.		68899	
		SCALE		3 : 1	
		SHT		1 OF 3	

PDM: Rev:W


STATUS: Released

Printed: Aug 01, 2010


RECOMMENDED BOARD LAYOUT
VIEWED FROM TOP

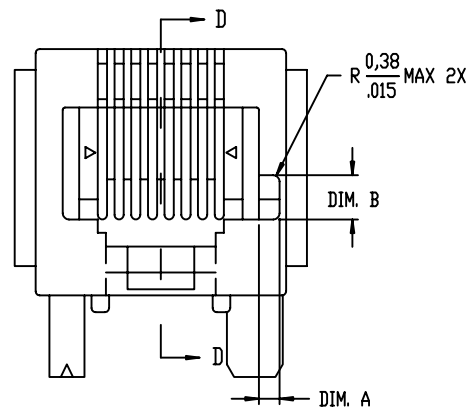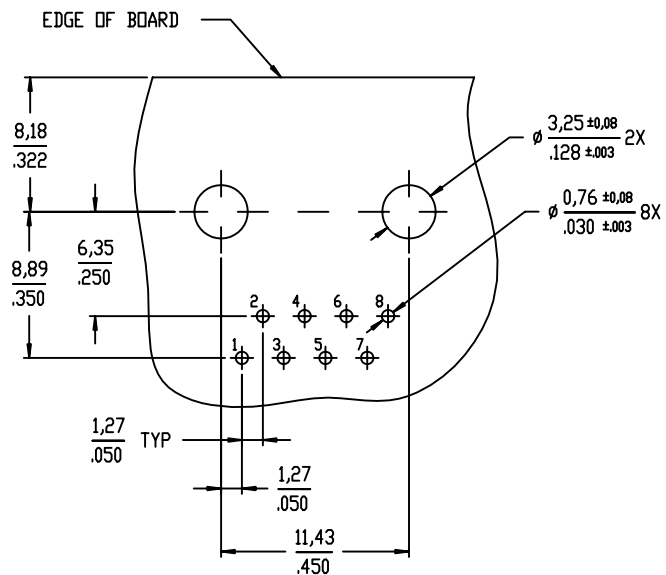

KEYED STYLE



LEFT EAR MOUNTING

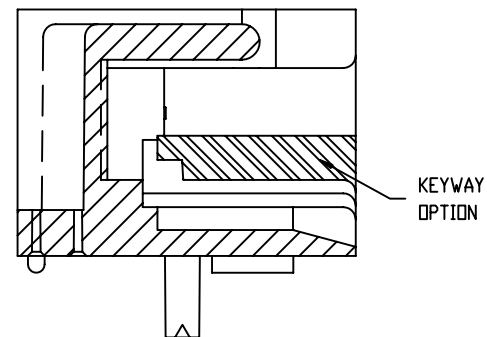

SECTION D-D

NOTE :

- 1 GXT IS 0,76 μ m / 30u" MIN GXT WITH Au FLASH OVER 1,27 μ m / 50u" MIN NI.
- 2 THIS PRODUCT MEETS EUROPEAN UNION DIRECTIVES AND OTHER COUNTRY REGULATIONS AS DESCRIBED IN GS-22-008.
- 3 THE HOUSING WILL WITHSTAND EXPOSURE TO 260°C PEAK TEMPERATURE FOR 10 SECONDS IN A WAVE SOLDER APPLICATION WITH A 1.60mm MINIMUM THICK CIRCUIT BOARD.
- 4 IF LF P/N PACKAGING MEETS GS-14-920 SPECIFICATION.

BY

CUSTOMER COPY

GEN. TOLERANCES		DO NOT SCALE DWG.		
X.X ±0.3 / X.XX ±.01				
X.XX ±0.13 / X.XXX ±.005		 		
X.XXX ±0.051 / X.XXXX ±.0020				
ANGLES ± 2°0'				DESCRIPTION 8 POS HORIZONTAL P.C.B. MOD JACK ASSY
	NAME	DATE		
DRAWN	JANET	15JUN.98		
CHECKED	M CHENG	19FEB.01		
APPROVED	M CHENG	19FEB.01		
		PRODUCT NO.		68899
		SCALE 3 : 1		SHT <u>2</u> OF <u>3</u>

1			2			3			4		
PRODUCT NO.		DIM. A	DIM. B	STYLE	POSITIONS LOADED	CONTACT PLATING	HOUSING COLOR	MOUNTING EARS	REMARKS	REV	
68899-001 -001LF		-	-	UNKEYED	ALL	GXT	BLACK	YES	-	L	
-002 -002LF		1,25 /,050	2,69 /,106	KEYED	ALL	GXT	BLACK	YES	-	M	
-003 -003LF		-	-	UNKEYED	2,3,4,5,6,7	GXT	BLACK	YES	-	N	
-004 -004LF		-	-	UNKEYED	ALL	GXT	BLACK	NO	-	P	
-004RLF		-	-	UNKEYED	ALL	GXT	RED	NO	-	R	
-004GLF		-	-	UNKEYED	ALL	GXT	GREEN	NO	-	S	
-005 -005LF		-	-	UNKEYED	ALL	GXT	GRAY	NO	-	T	
-006 -006LF		-	-	UNKEYED	ALL	0,76um /30*u Au	BLACK	YES	-	U	
-007 -007LF		1,25 /,050	2,69 /,106	KEYED	ALL	GXT	BLACK	NO	-	V	
-008 -008LF		-	-	UNKEYED	ALL	GXT	BLACK	LEFT ONLY	-		
-009 -009LF		-	-	UNKEYED	ALL	GXT	BLACK	RIGHT ONLY	-		
-010 -010LF		-	-	UNKEYED	ALL	1,27um /50*u Au	BLACK	YES	-		
-011 -011LF		-	-	UNKEYED	1,4,5,8	GXT	BLACK	YES	-		
-012 -012LF		-	-	UNKEYED	ALL	0,76um /30*u Au	BLACK	NO	-		
-013 -013LF		-	-	UNKEYED	ALL	1,27um /50*u Au	BLACK	NO	-		
-014 -014LF		1,25 /,050	2,69 /,106	KEYED	ALL	0,76um /30*u Au	BLACK	NO	-		
-015 -015LF		1,25 /,050	2,69 /,106	KEYED	ALL	1,27um /50*u Au	BLACK	NO	-		
LEAD FREE PRODUCT NO.											
BY											
DESCRIPTION											
8 POS HORIZONTAL P.C.B. MOD JACK ASSY											
PRODUCT NO. 68899											
SCALE 3 : 1 SHT 3 OF 3											
PDM: Rev:W STATUS:Released Printed: Aug 01, 2010											