
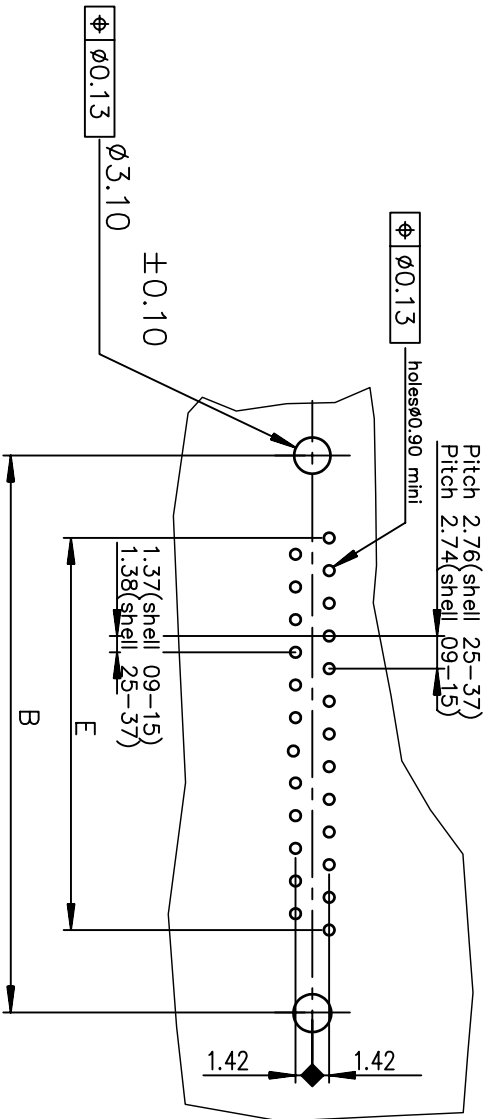
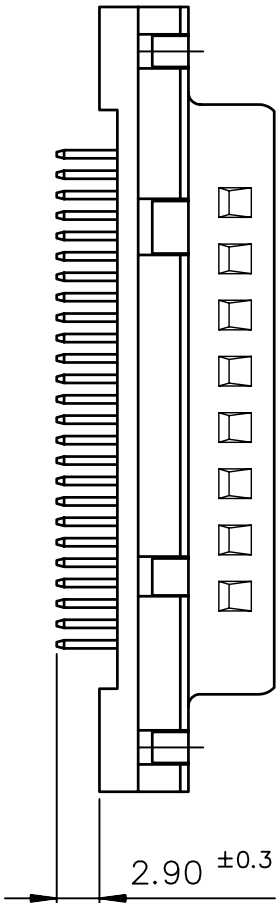
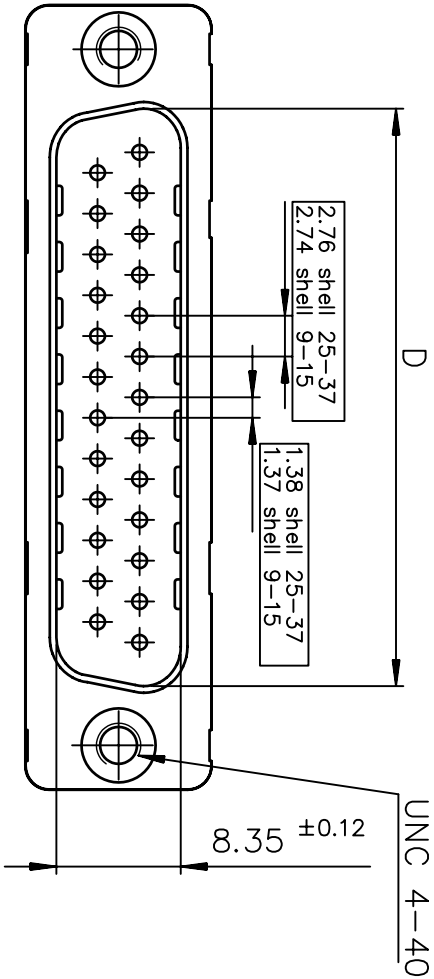
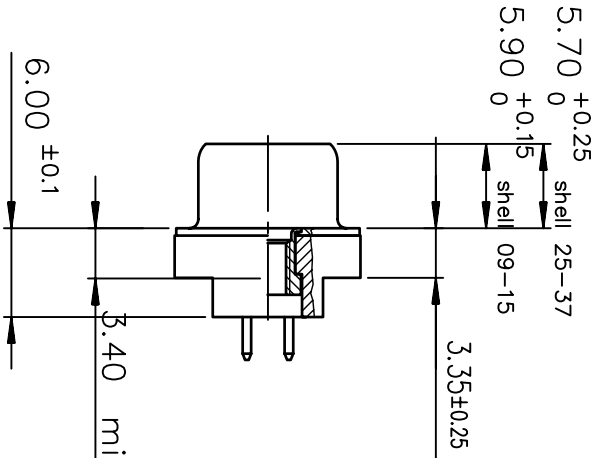


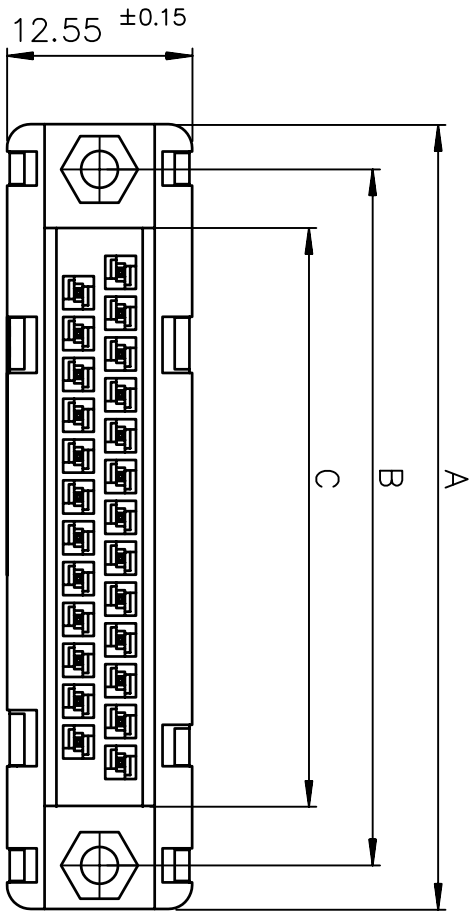

PC card drilling dimensions(after plating) _____
(thickness 1.60±0.20mm)

SHELL	A±0.38	B±0.12	C±0.10	D±0.25	E±0.07	PART NUMBER
09	30.81	24.99	16.96	16.79	10.96	D09P24A.PX00
15	39.14	33.32	25.18	25.12	19.18	D15P24A.PX00
25	53.03	47.04	39.12	38.84	33.12	D25P24A.PX00
37	69.32	63.50	55.68	55.30	49.68	D37P24A.PX00

Plating: 4 ---> flash AU
Plating: 6 ---> 0.76 » AU

SHELL	A±0.38	B±0.12	C±0.10	D±0.25	E±0.07	PART NUMBER
09	30.81	24.99	16.96	16.79	10.96	D09P24A.PX00LF
15	39.14	33.32	25.18	25.12	19.18	D15P24A.PX00LF
25	53.03	47.04	39.12	38.84	33.12	D25P24A.PX00LF
37	69.32	63.50	55.68	55.30	49.68	D37P24A.PX00LF

Plating: 4 ---> flash AU
Plating: 6 ---> 0.76 » AU

GENERAL CHARACTERISTICS AND ROHS INFORMATIONS:
SEE DRAWING C01-8646-0000

European Views

rev	ecn no	dr	date
C	-	JOU	1996/09/25
D	LS05-001	MPE	2005/03/10
E	LS05-0056	MPE	2005/06/27
F	LS06-0097	LGO	2006/07/29
G	I09-0268	NG	2009-11-24
-	-	-	-

www.fciconnect.com		surface	ISO 1302	tolerance std	ISO 406 ISO 1101	projection	mm	Scale
		TOLERANCES UNLESS OTHERWISE SPECIFIED						2
Dr	LELEON	1992-09-10	ANGULAR	0.X	±0.1	size	A3	
Eng	PESSON	1992-09-10	LINEAR	0.XX	±0.1	ECN	I09-0268	
Chr	NIRMAL GEORGE	2009-11-24	0.XX' ±2°	0.XXX	±0.1	ECN	I09-0268	
Appr	SUDHIR VARMA	2009-11-24	Product family		D-SUB		Spec ref	-
FCI		MALE CONNECTOR DELTA D ST		straight,solder type for		C01-8646-0097		Rev.
catalog no		-		-		CUSTOMER		sheet 1 of 1

