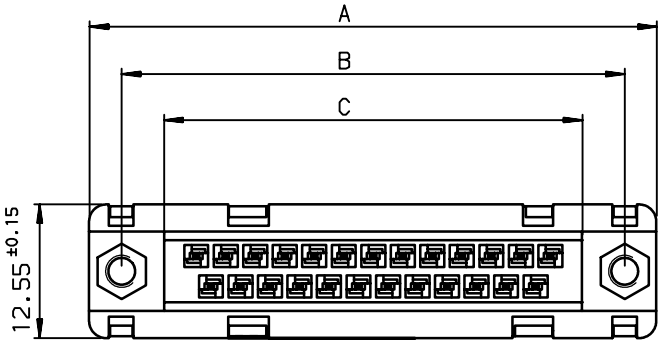

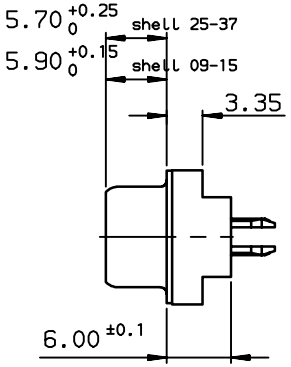

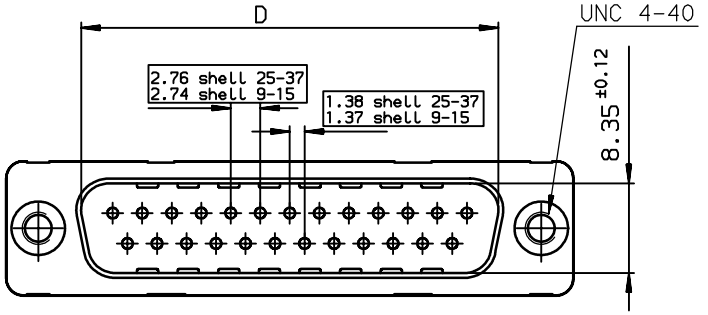

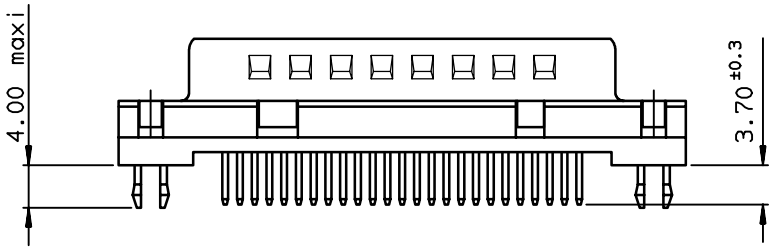

TIN LEAD PART NUMBER

SHELL	A±0.38	B±0.12	C±0.10	D±0.25	E±0.07	PART NUMBER
09	30.81	24.99	16.96	16.79	10.96	D09P24B.GX00
15	39.14	33.32	25.18	25.12	19.18	D15P24B.GX00
25	53.03	47.04	39.12	38.84	33.12	D25P24B.GX00
37	69.32	63.50	55.68	55.30	49.68	D37P24B.GX00

Protection: 4 --> flash AU
6 --> 0.76µ AU

LEAD FREE PART NUMBER

SHELL	A±0.38	B±0.12	C±0.10	D±0.25	E±0.07	PART NUMBER
09	30.81	24.99	16.96	16.79	10.96	D09P24B.GX00LF
15	39.14	33.32	25.18	25.12	19.18	D15P24B.GX00LF
25	53.03	47.04	39.12	38.84	33.12	D25P24B.GX00LF
37	69.32	63.50	55.68	55.30	49.68	D37P24B.GX00LF

Protection: 4 --> flash AU
6 --> 0.76µ AU

PC card drilling dimensions(after plating)

(thickness 1.,60±0.20mm)

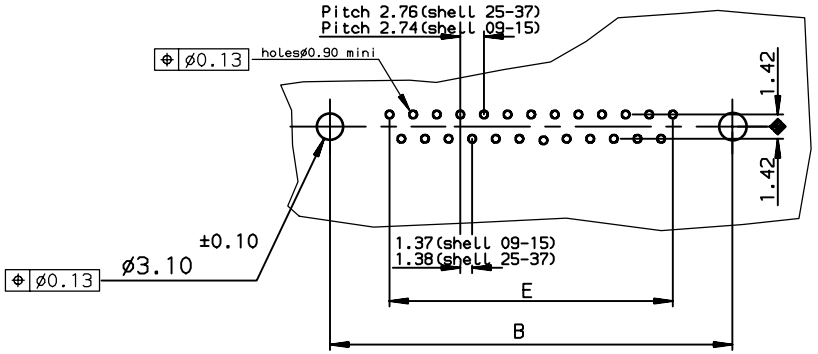

GENERAL CHARACTERISTICS AND ROHS INFORMATIONS:
SEE DRAWING C01-8646-0000

European Views

rev	ecn no	dr	date
A	-	JOU	1996/09/10
B	LS05-001	MPE	2005/03/14
C	LS05-0056	MPE	2005/06/28
D	LS06-0097	LGO	2006/07/28
-	-	-	-
-	-	-	-
-	-	-	-

www.fciconnect.com

surface ISO 1302 | tolerance std ISO 406 ISO 1101

TOLERANCES UNLESS OTHERWISE SPECIFIED

projection | mm

Dr	JOUBERT	1996/09/10
Eng	PESSON	1996/09/10
Chr	LEGARE	1996/09/10
Appr	LEGARE	1996/09/10

ANGULAR 0.XX° ±2° | LINEAR 0.X ±0.1 | 0.XX ±0.1 | 0.XXX ±0.1

size A3 | Scale 2

ECN LS06-0097

Product family D-SUB | Spec ref -

title: MALE CONNECTOR DELTA D ST straight,solder type for

dwg no C01-8646-0489 | Rev. D

catalog no - | CUSTOMER | sheet 1 of 1

REV F - 2006-04-17

PDM: Rev:D STATUS:Released Printed: Mar 04, 2009

Copyright FCI.