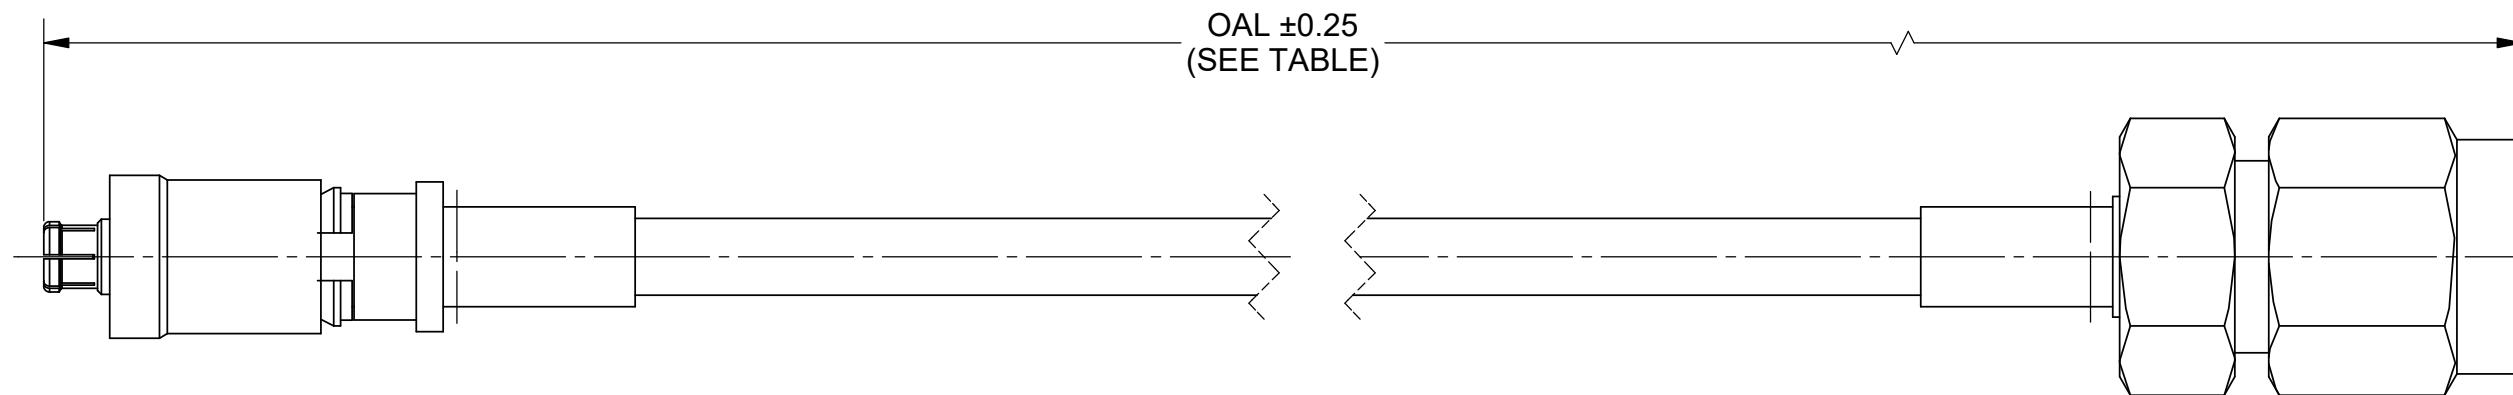


PRODUCT DATA DRAWING

REVISION HISTORY			
REV	DESCRIPTION	DATE	APPROVED
-	DCN 47741	7/18	STW

**MATERIAL:**

CONNECTORS: SMPM COMPRESSIBLE FEMALE (3221-40066)
SVK (2.92mm) STRAIGHT PLUG (SF1511-60071)

CABLE: T - FLEX 405

SHRINK TUBING: M23054/5

SV P/N	OAL (IN)
7032-7435-120	12.000
7032-7435-180	18.000

PERFORMANCE:

IMPEDANCE: 50 OHMS
FREQ. RANGE: DC TO 40.0 GHZ.

MATERIAL: SEE NOTES	DIMENSIONS ARE IN INCHES TOLERANCES: FRACTIONAL: ±1/64 ANGULAR: X° ±1°0' X°X' ±15' DECIMAL: .X ±.030 XX ±.010 XXX ±.005	UNLESS OTHERWISE SPECIFIED 1) ALL DIMENSIONS ARE IN INCHES (MILLIMETERS) 2) ALL DIMENSIONS ARE AFTER PLATING. 3) BREAK CORNERS & EDGES .005 R. MAX. 4) CHAM. 1ST & LAST THREADS. 5) SURFACE ROUGHNESS 63+.MIL-STD-10. 6) DIA.'S ON COMMON CENTERS TO BE CONCENTRIC WITHIN .005 T.I.R. 7) REMOVE ALL BURRS	 Amphenol 2400 Centrepark West Drive, Suite 100 West Palm Beach, FL 33409 TITLE: SMPM COMPRESSIBLE FEMALE TO SVK STRAIGHT PLUG FOR Ø.085 CABLE SIZE CAGE CODE DWG. NO. 7032-7435-120-180 B 95077
FINISH: N/A	INTERPRET DIMENSIONS AND TOLERANCES PER ASME Y14.5M - 1994	THIRD ANGLE PROJECTION	
SURFACE AREA: N/A		DRAWN: MKK 7/25/18	
PROPRIETARY		CHECKED: STW 7/25/18	
THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF SV MICROWAVE, INC. ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF SV MICROWAVE, INC IS PROHIBITED.		APPROVED: STW 7/25/18	SCALE: 4:1
			SHEET 1 OF 1