NOTES:
1. ELECTRICAL SPECIFICATIONS:
   CENTER FREQUENCY = 1615±10 MHz
   LEFT HAND CIRCULAR POLARIZATION
   2:1 VSWR B.W. = 135MHz MIN.
   GAIN SHALL BE 3dBic MIN. @ CF
   A/R SHALL BE 6dB MAX. @ CF
   Z_{IN} = 50 OHMS
2. 100% ELECTRICAL TEST PRIOR TO DELIVERY.
3. FOOTPRINT AND ELECTRICAL SPECIFICATIONS ARE SUBJECT TO CHANGE.

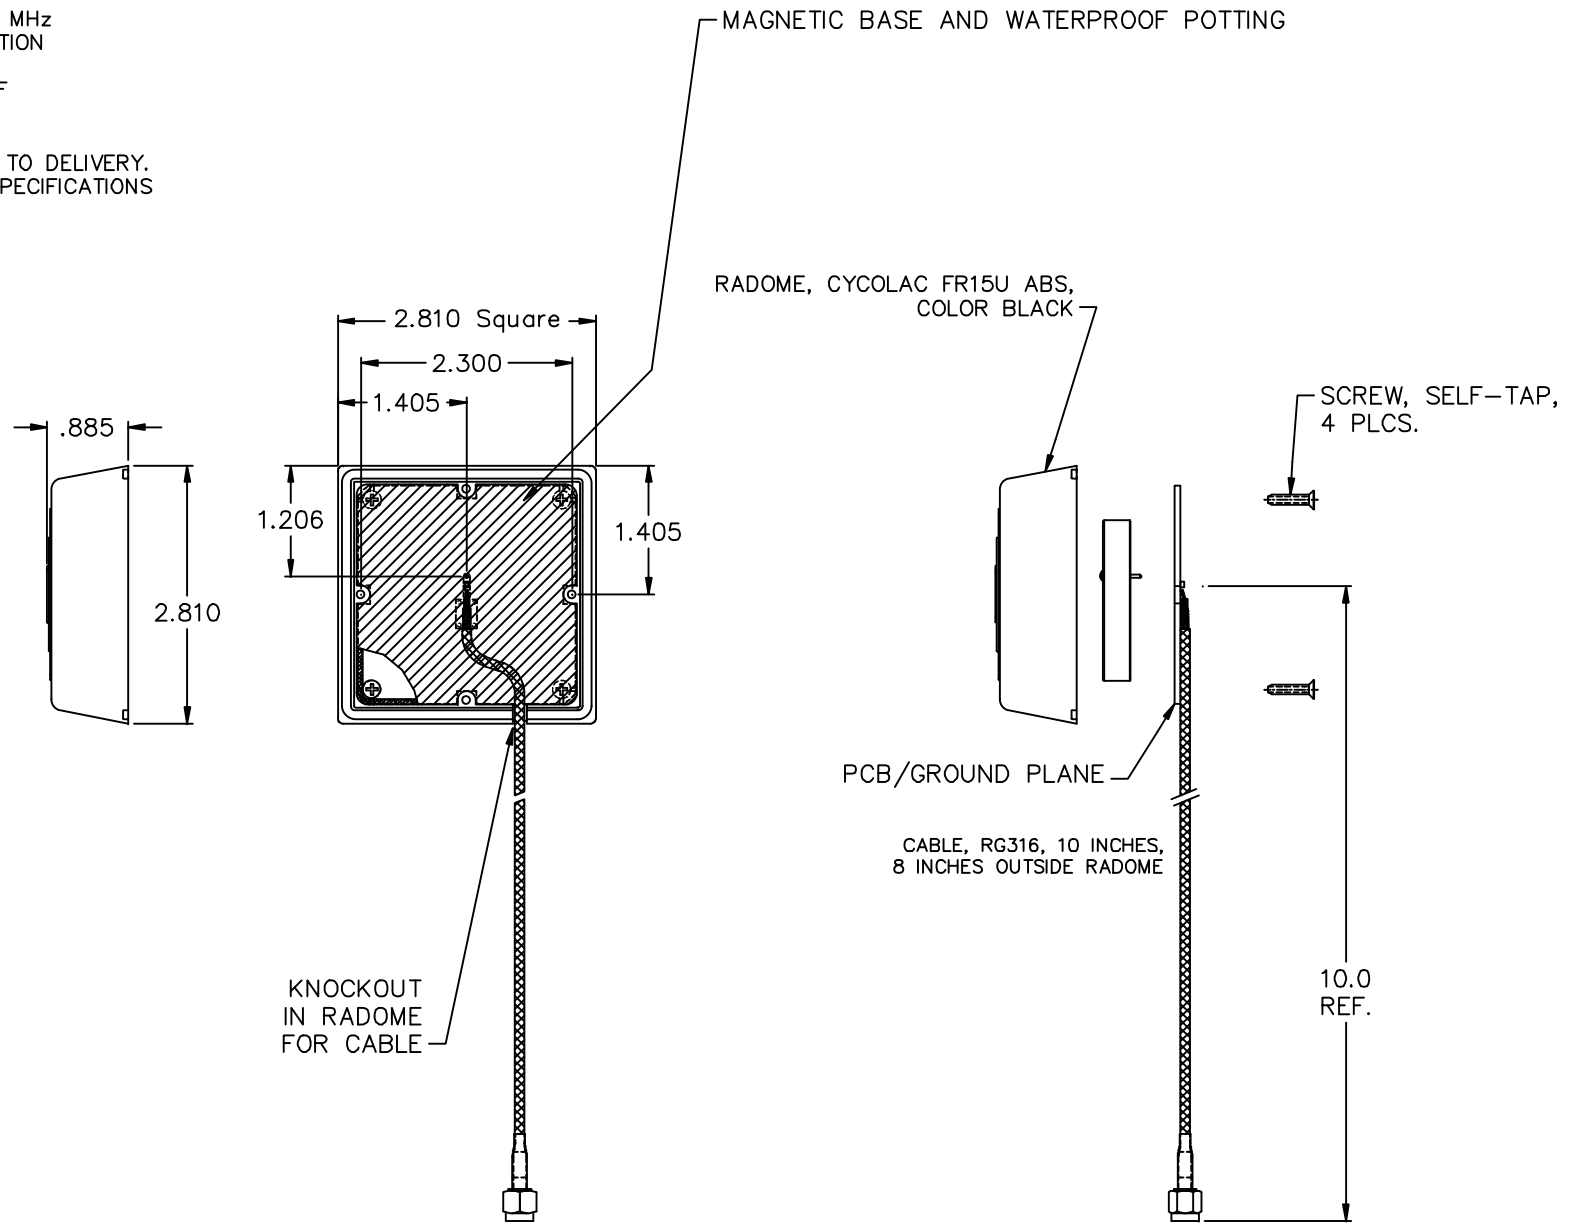

REV. NO.	CHANGE NOTICE	
00	CN 54549-ENG	

UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES.
DO NOT SCALE.
THIRD ANGLE

TOLERANCES UNLESS OTHERWISE SPECIFIED
Fractions ± 1/64
Dec. .xx± .01
Dec. .xxx± .005
Angles ±0° 30'
CODE IDENT. NO. OLSP2

SPECTRUM CONTROL INC. FAIRVIEW PENNSYLVANIA

Dwn. KAUFFMAN	Description ASSEMBLY DRAWING
Date 5-25-10	
Engr. J. KRAUS	AR1615CC1575XXF
Sheet 1 of 1	

Quality Products From The Specialists In Electro-Magnetic Compatibility