

■ Features

- Power Rating: 100W
- Input Voltage: 120-277Vac \pm 10%
- Constant voltage design
- Adjustable output current(0-8000mA)
- Efficiency to 88%
- UL Class P, Class 2
- OCP, OVP, and SCP
- IP20
- 5-year warranty
- J-Box Design



*Product images are for illustrative purposes only and may vary from actual design.

■ Application

- Indoor lights

■ Model List*(See part number scheme for model number details)

Model Number	Input Voltage Range	Output Power	Output Voltage	Output Current Min.	Output Current Max.	Efficiency	Certification
LXWV-100S012ST-J20	120~277Vac	96W	12V	0mA	8000mA	TBD	UL/cUL
LXWV-100S024ST-J20	120~277Vac	96W	24V	0mA	4000mA	87%@120V 88%@240V 88%@277V	UL/cUL

■ Technical Data

Input voltage range	120~277Vac \pm 10%
Frequency	50/60Hz
Power factor	> 0.9 @full load, 120V through 277V
Inrush current	20A @230V
Max input current	0.94A @120V and 0.41A @277V
THD	< 20%
Load Regulation	\pm 2%
Line Regulation	\pm 1%
Voltage Tolerance	\pm 5% at full load condition
Turn-on Delay Time	< 2s at full load condition
Overshoot	< 10% at full load condition
No Load Power Consumption	< 3W
Ripple & Noise (pk-pk)	< 3%
Withstand voltage	Input to output, 2,800Vdc, 2mA
Leakage current	Maximum 0.5mA at 277Vac, 60Hz input

Technical Sales / Customer Service: +1-818-338-7788 • Email: sales@autec.com

31328 Via Colinas Suite 102 • Westlake Village, CA 91362 USA • www.autec.com

June 14, 2019

1 / 5

■ Technical Data (cont.)

Protection	Over voltage protection: Hiccup mode. Protection will trigger when load voltage exceed specified output voltage and will auto recover after the fault mode is removed. Over current protection: Hiccup mode. Protection will trigger when load current exceed specified output current and will auto recover after the fault mode is removed. Short circuit protection: Hiccup mode. Protection will trigger when short circuit and will auto recover after the fault mode is removed.
Operating temperature	-40 to 60°C
Storage temperature	-40 to 85°C
Humidity	5% to 95%
MTBF	258,000 hours at 40°C ambient (~70°C case temp)
Life rating	80,000 hours at 120Vac input, 100% load and 60°C case temperature
Maximum case Temperature	90°C
Length (L)	11.46" (291mm)
Width (W)	3.00" (77mm)
Height (H)	1.30" (33mm)
Mounting (M)	11.02" (280mm)
Packing	1.2kg /unit; 15pcs /carton; 540pcs /pallet

■ Safety Compliance

UL/cUL	UL 8750
CE	EN61347-1, EN61347-2-13
FCC, 47CFR Part 15	ANSI C63.4:2009 Class B (Consumer Limit)
EN61000-3-2	Harmonic Current Emissions Class C

Disclaimer:

Autec Power Systems' (Autec) LED Drivers are Hi-Pot tested during the manufacturing process. Autec assumes no responsibility for secondary Hi-Pot testing at customer location or designated production line(s). Should customer require further Hi-Pot testing, at their own production line, following assembly of the LED Driver into the customer's assembled fixture, Autec requests advance notice. This request must be communicated to Autec in a timely manner and is recommended to be requested at time of issuing each purchase order.


Technical Sales / Customer Service: +1-818-338-7788 • Email: sales@autec.com

31328 Via Colinas Suite 102 • Westlake Village, CA 91362 USA • www.autec.com


June 14, 2019

2 / 5

■ Lifetime vs Case Temperature

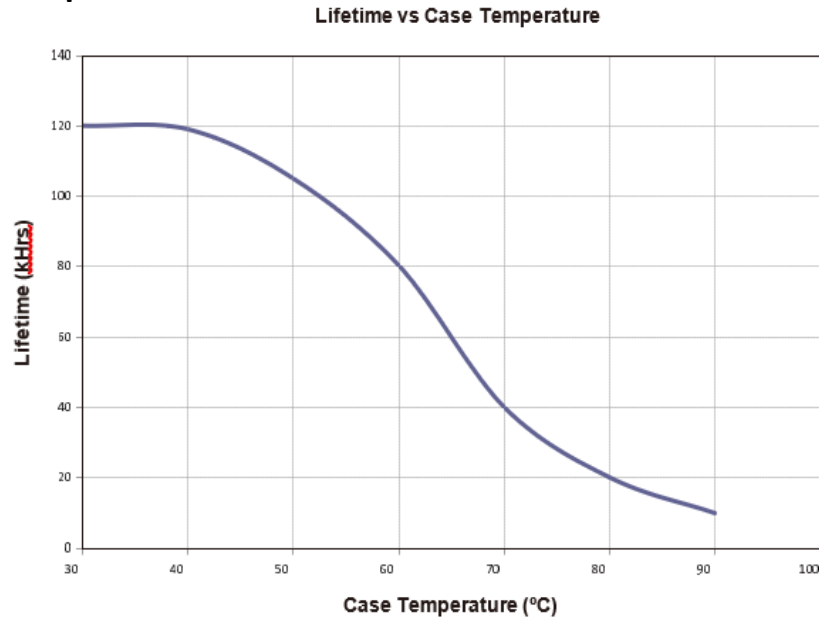

■ Power Derating vs Case Temperature

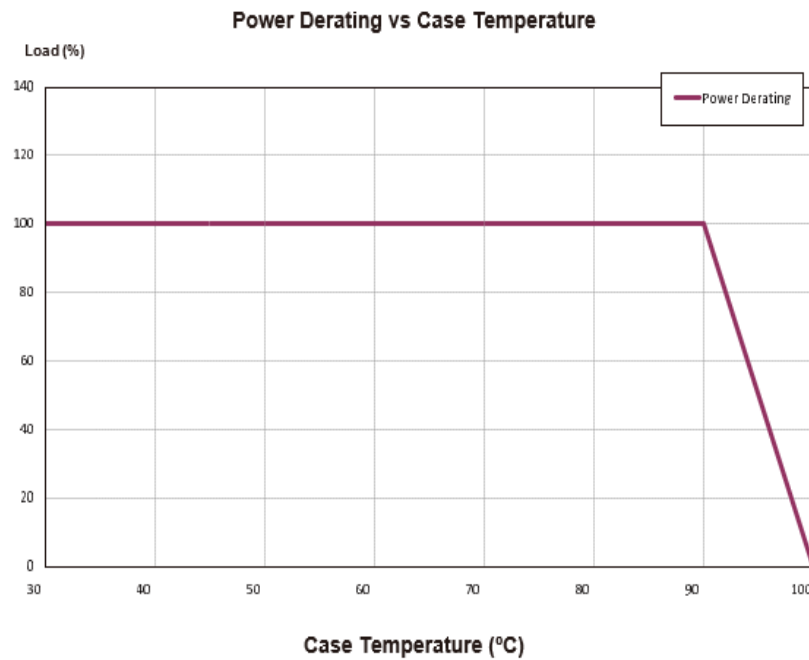


Technical Sales / Customer Service: +1-818-338-7788 • Email: sales@autec.com

31328 Via Colinas Suite 102 • Westlake Village, CA 91362 USA • www.autec.com


June 14, 2019

3 / 5

■ Power Factor vs Load

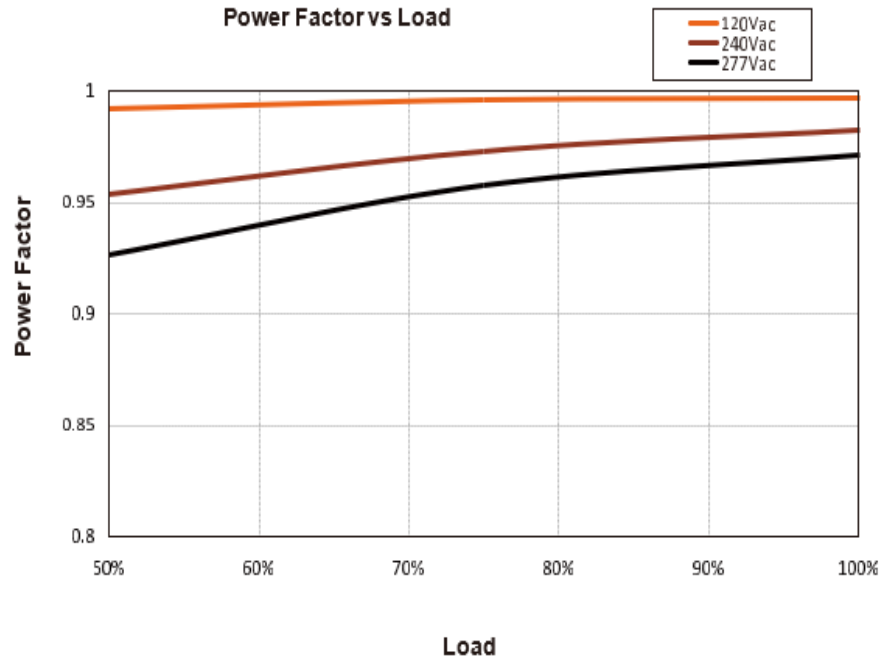

■ Efficiency vs Load

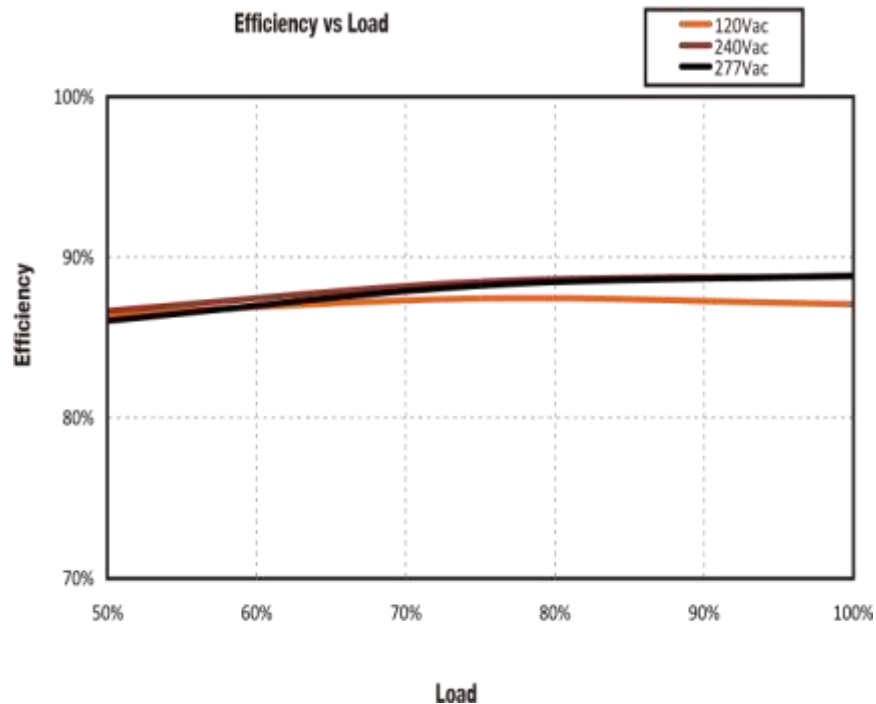


Technical Sales / Customer Service: +1-818-338-7788 • Email: sales@autec.com

31328 Via Colinas Suite 102 • Westlake Village, CA 91362 USA • www.autec.com



June 14, 2019

4 / 5

■ **Wiring Diagram**

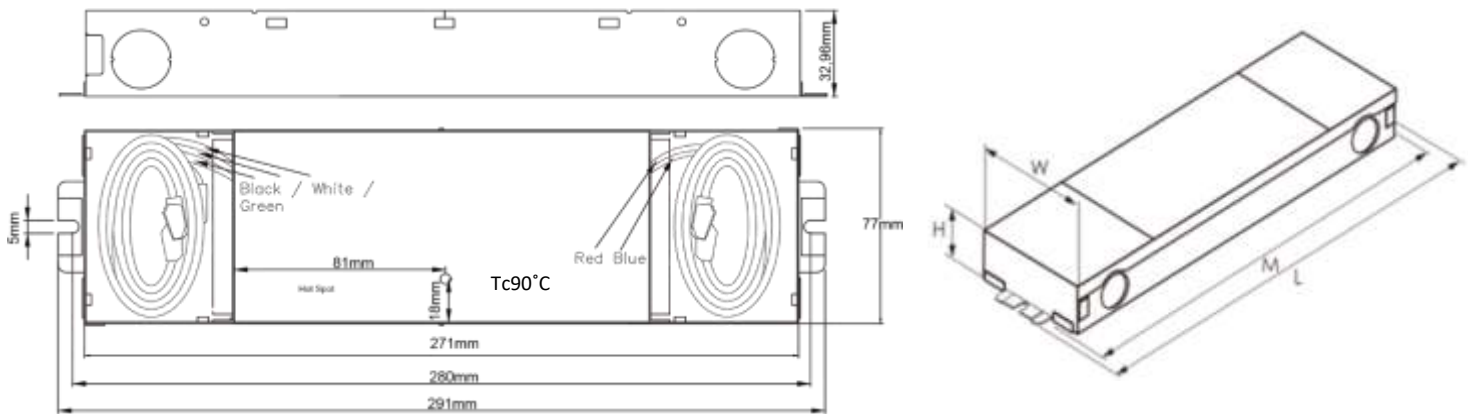

Wire Specifications	
Input	12", UL 1316 #18AWG (White, Black, and Green)
Output	12", UL 1316/1430 #18AWG (Red and Blue)

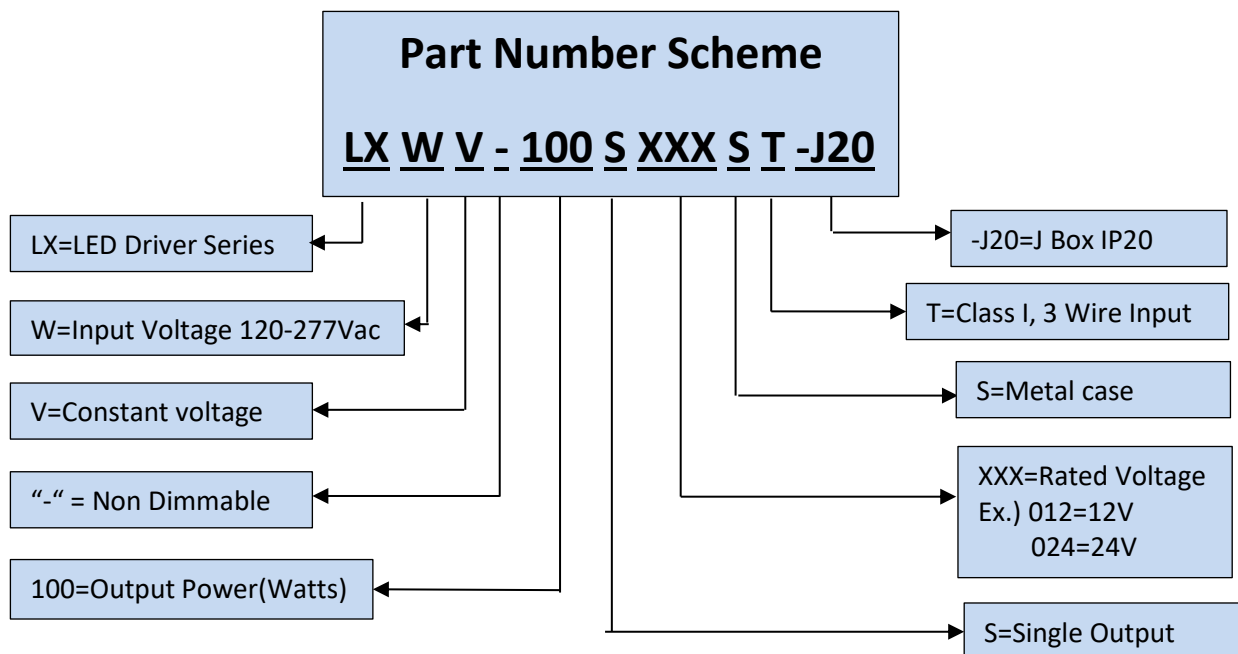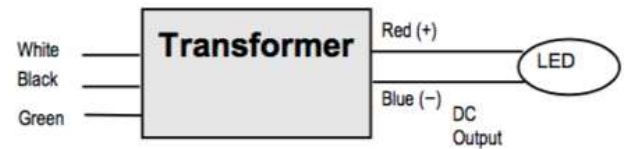

***Product images are for illustrative purposes only and may vary from actual design.**

***Specifications are subject to change without notice. Autec is not responsible for issues arising from errors or omissions.**

Technical Sales / Customer Service: +1-818-338-7788 • Email: sales@autec.com

31328 Via Colinas Suite 102 • Westlake Village, CA 91362 USA • www.autec.com

June 14, 2019

5 / 5