

KSJ Series

Spherical Actuator Tact Switches

Features/Benefits

- **Spherical actuator allows actuation force off center $\pm 30^\circ$ with regard to vertical**
- **RoHS compliant and compatible**
- **Designed for mechanisms**
- **Compliant side actuation**

Typical Applications

- **Automotive**
- **Cranes, off road, railway**
- **Factory automation**
- **Security systems**



B

Tactile Switches

Specification

FUNCTION: Momentary action
CONTACT ARRANGEMENT: 1 make contact = SPST, N.O.
DISTANCE BETWEEN BUTTON CENTERS (min.): 7.62 (0.300)
TERMINALS: PC pins
SEALING: IP60

Environmental

OPERATING TEMPERATURE: -40°C to 85°C
STORAGE TEMPERATURE: -40°C to 85°C

Silver

Gold

Packaging

Delivered in boxes of 250 pieces.

Mechanical

Type	Actuation force N (grams)	Operating life (operations) axial	Operating life (operations) radial	Travel to make (mm)
KSJ0M21160SH	2 \pm 0,5	100,000	30,000	0,6 \pm 0,3
KSJ0M41180SH	3,0 \pm 0,8	100,000	30,000	0,55 \pm 0,25
KSJ0M21180SH	2 \pm 0,5	100,000	30,000	0,35 \pm 0,2
KSJ0M91180SH	3,9 \pm 0,8	100,000	30,000	0,7 \pm 0,25

Electrical

MAXIMUM POWER: 1 VA
MAXIMUM VOLTAGE: 32 VDC
MINIMUM VOLTAGE: 20 mV
MAXIMUM CURRENT: 50 mA
MINIMUM CURRENT: 1 mA
DIELECTRIC STRENGTH (50 Hz, 1 min.): ≥ 250 Vrms
CONTACT RESISTANCE: ≤ 100 m Ω
INSULATION RESISTANCE (100V): $\geq 10^9$ ohms
BOUNCE TIME: ≤ 1 ms

Silver

Gold

Process

Wave soldering, compatible with lead free soldering profile.

NOTE: Specifications listed above are for switches with standard options.
For information on specific and custom switches, consult Customer Service Center.

This data sheet does not provide enough information for applications which require a certain level of quality or safety such as automotive, medical systems, safety equipment.
Please contact your sales representative to get contractual specification package.


* Please contact your C&K representative for any question regarding the product integration.

How To Order

Our easy build-a-switch concept allows you to mix and match options to create the switch you need. To order, select desired option from each category and place it in the appropriate box.

However, please note that all the combinations of these options are not feasible.


For any part number different from those listed in the table above, please consult your local representative.

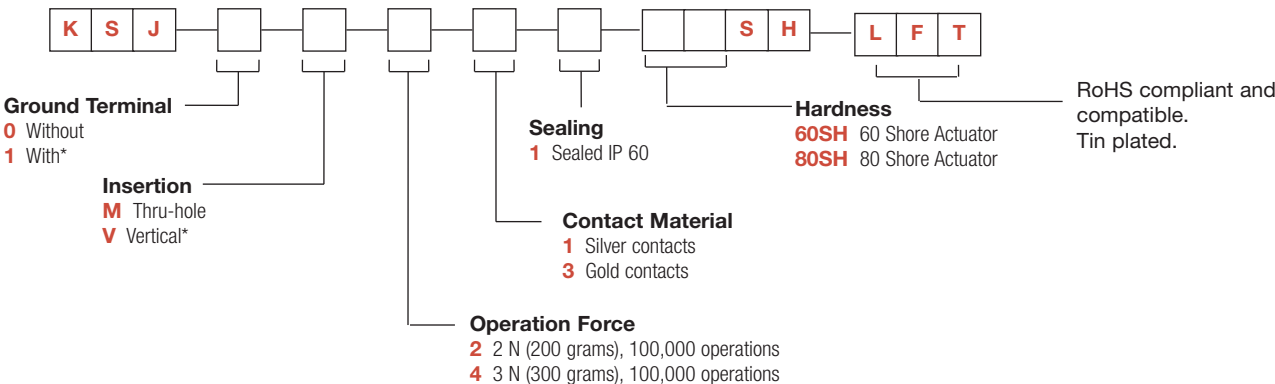

Dimensions are shown: mm (inches)
Specifications and dimensions subject to change

KSJ Series Spherical Actuator Tact Switches


KSJ

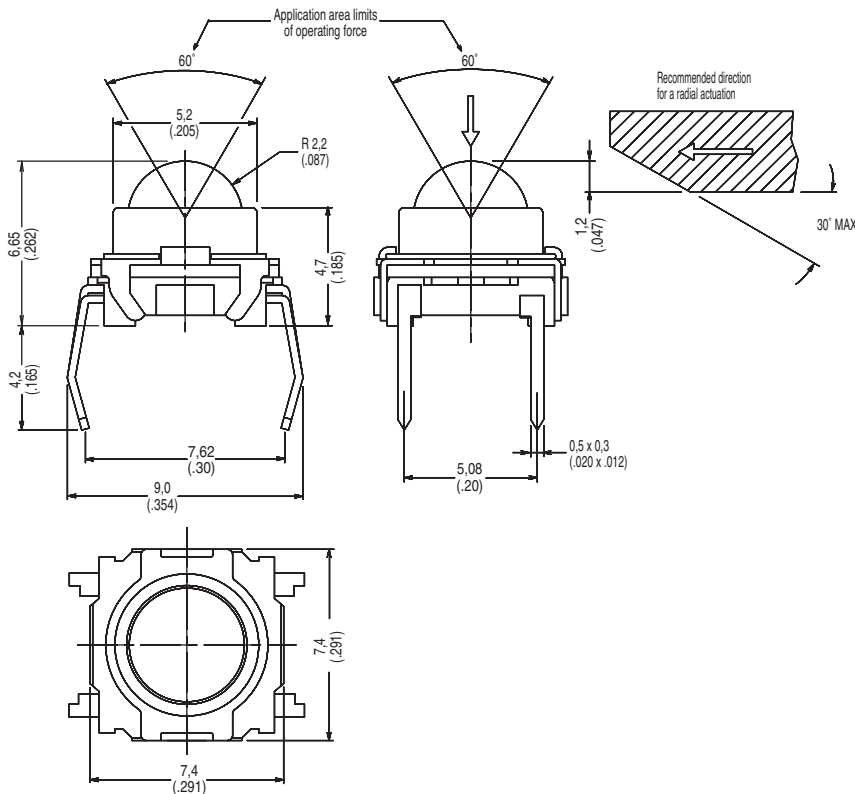


KSJ0M211

INSERTION


M THRU-HOLE

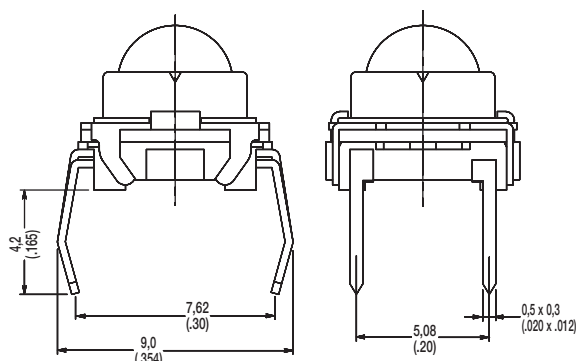


PCB LAYOUT



V VERTICAL

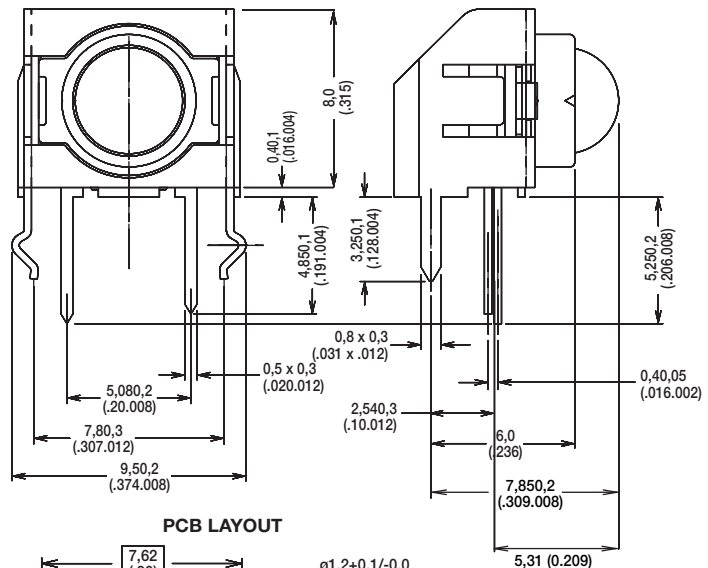

PCB LAYOUT

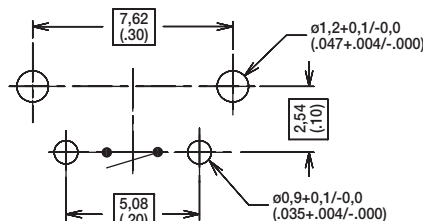

Dimensions are shown: mm (inches)
Specifications and dimensions subject to change

