


Polzahl No. of pos.	A ±0.2	B ±0.1	C ±0.1	D ±0.1	Art.-Nr. Part-No
13	45.6	12x2.5=30	12x2.5=30	40	101E10079X
21	65.6	20x2.5=50	20x2.5=50	60	101E10099X
31	90.6	30x2.5=75	30x2.5=75	85	101E10119X

NOTES:

1. INSULATOR: PC GF UL 94 V-1, GREY
2. CONTACTS: COPPER ALLOY
PLATING: HARD SILVER PLATED
500 MATING CYCLES
3. CONNECTOR IS PART MARKED: PART-NO CONEC ABC

P.C.B. HOLE DRILLINGS

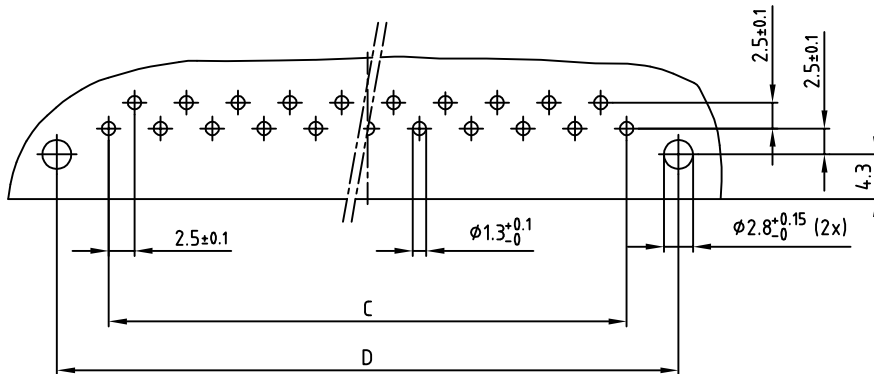

Directive 2002/95/EC RoHS compliant

THIS DRAWING MAY NOT BE COPIED OR REPRODUCED IN ANY WAY, AND MAY NOT BE PASSED ON TO A THIRD PARTY, WITHOUT WRITTEN PERMISSION. OWNERSHIP AND COPYRIGHT OF CONEC Gmbh DO NOT ALTER CAD DRAWING BY HAND

1 x b	Ä688	15.03.2013	E.Mick.
a	Original		
rev.	description	date	name

tolerance		dim. in mm	
2006	date	name	
drawn	21.08.	Sonnenberg	
appd.	21.08.	Mickenbecker	
norm	DIN 41617		
d-old			

scale:	2:1	
material:	SEE NOTES	
title:	MALE CONNECTOR 13pos.-31pos. / 2,5mm with angled solder pins	
dwg no:	10K4A014	DIN-A 3 sh: 1/1
part no:	SEE TABLE	