

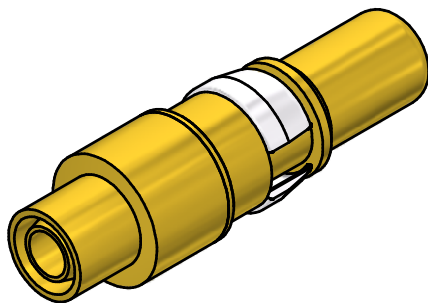


STRIPPING DIMENSIONS

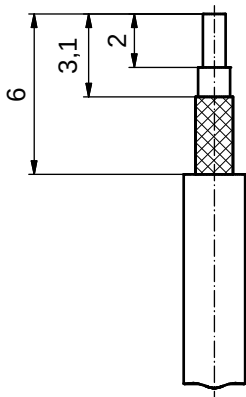

ASSEMBLY TOOLING: (b)

1. CENTER CONTACT:
SOLDERED
2. OUTER CONDUCTOR:
SOLDERED OR CRIMPED
USE CRIMP TOOL: 360X10519X
WITH TOOL INSERT: 360X11019X
INSERT CAVITY B: HEX 3.25 / .128"

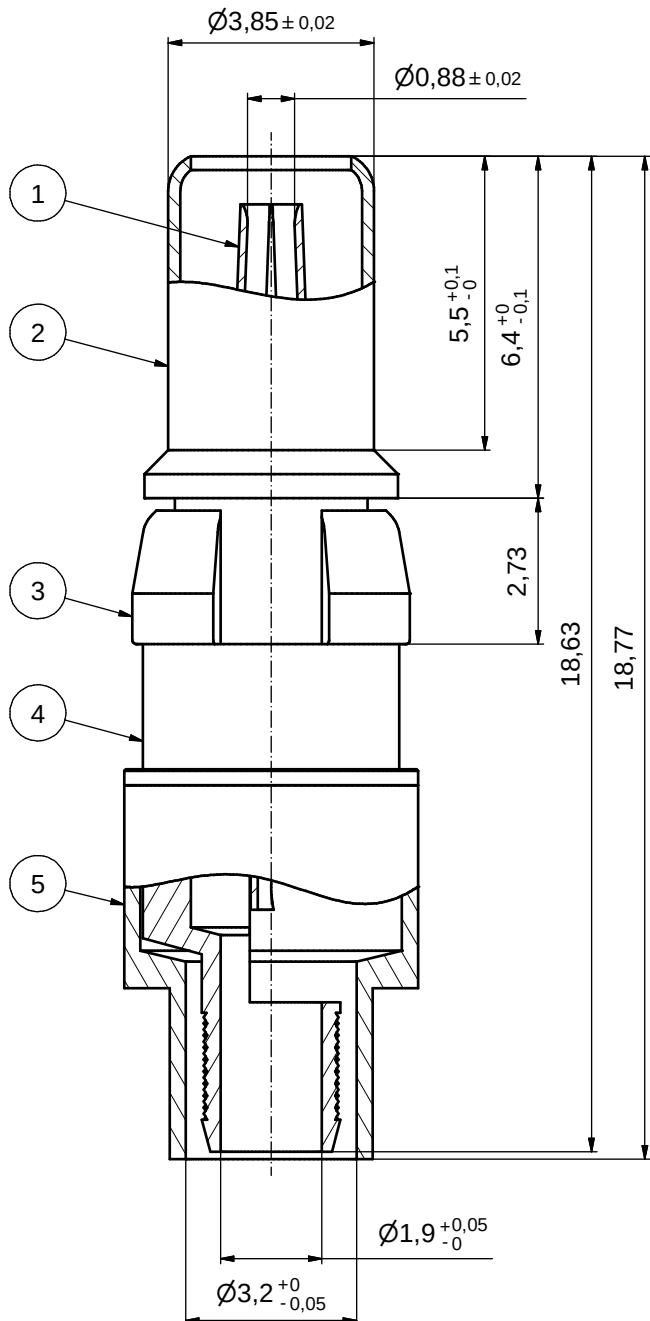

(b)

Part no.	Finish Pos.1	Finish Pos.2	Finish Pos.3	Finish Pos. 4/5
131A30019X	GOLD FLASH over NICKEL	GOLD FLASH over NICKEL	NICKEL PLATED	GOLD FLASH over NICKEL
131C30019X	min. 30µin HARD GOLD over min. 50µin NICKEL	min. 30µin HARD GOLD over min. 50µin NICKEL	NICKEL PLATED	GOLD FLASH over NICKEL
131J30019X	min. 50µin HARD GOLD over min. 50µin NICKEL	min. 30µin HARD GOLD over min. 50µin NICKEL	NICKEL PLATED	GOLD FLASH over NICKEL

RoHS compliant

THIS DRAWING MAY NOT BE COPIED OR
REPRODUCED IN ANY WAY, AND MAY NOT
BE PASSED ON TO A THIRD PARTY WITHOUT
WRITTEN PERMISSION.
OWNERSHIP AND COPYRIGHT OF CONEC GmbH

DO NOT ALTER CAD DRAWING BY HAND

				tolerance			dim. in mm
4 x b	A5716	10.07.2015	K.H.	date	name		
a	Original			drawn	10.07.15 Henneboel		
rev.	description	date	name	appd.	10.07.15 Lehmenkühler		
				norm			
				d-old	13K2IU9A		

CONEC

scale: 10:1 (5:1)	
material: see partlist	
title:	
COAXIAL CONTACT PLUG 75 OHM	
(b) for Cable RG 179BU, 187AU	
center contact solder, outer contact for crimp termination	
dwg no:	DIN-A3
(b) 13K1A5011	sh: 1
part no:	see table