

6

5

4

3

2

1

used for: D-SUB COMBINATION

H

H

G

G

F

F

E

E

D

D

C





C

B

B

A

A

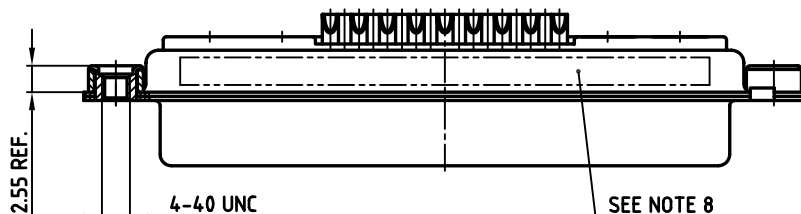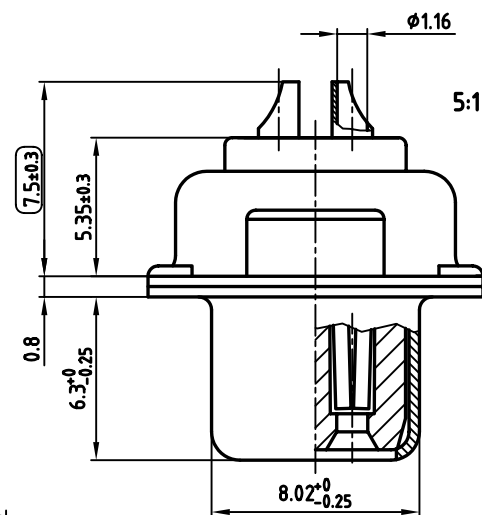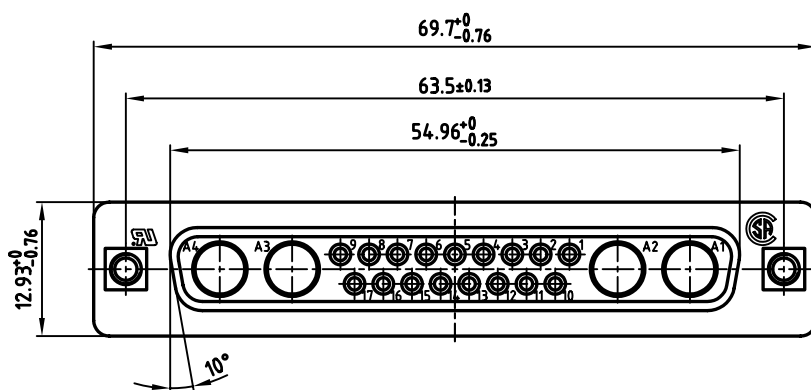

NOTES:

- METALSHELLS: STEEL; min. 320 μ " TIN
- INSULATORS: PBT GF UL 94 V-0, GREEN
- SIGNAL CONTACTS: COPPER ALLOY
PLATING: 30 μ " HARD GOLD OVER min. 50 μ " NICKEL
SOLDER CUP ACCEPTS CABLE AWG 20
- NO CONTACTS ON POS. A1-A4
- THREADED INSERT: COPPER ALLOY; min. 200 μ " TIN over 80 μ " NICKEL
- COLLAR: COPPER ALLOY; min. 200 μ " TIN over 80 μ " NICKEL
- MAXIMUM TORQUE VALUE FOR THREAD: 6" LBS
- CONNECTOR IS PART MARKED: 321WA4SCM99A30X CONEC ABC
- = CHECK DIMENSION

Directive 2002/95/EC
RoHS
Compliant

APPROVAL * FREIGABE * DEBLOCAGE * AUTORIZACION * APPROVAL	
CUSTOMER APPROVAL DATE:	
NAME:	TITLE:
COMPANY NAME:	
APPROVAL * FREIGABE * DEBLOCAGE * AUTORIZACION * APPROVAL	

THIS DRAWING MAY NOT BE COPIED OR
REPRODUCED IN ANY WAY, AND MAY NOT
BE PASSED ON TO A THIRD PARTY WITHOUT
WRITTEN PERMISSION.
OWNERSHIP AND COPYRIGHT OF CONEC GmbH
DO NOT ALTER CAD DRAWING BY HAND

rev.	description	date	name
a	Origin		

tolerance	dim. in mm
2006	date
drawn	09.02.
appd.	09.02.
norm	
d-old	

scale:	2:1 (5:1)
material:	SEE NOTES
title:	D-SUB COMBINATION FEMALE 21WA4S SOLDER CUP with threaded insert
dwg no:	AutoCAD 2004
13K1A1717	DIN-A
part no: 321WA4SCM99A30X	3 sh: 1/1