


15545.4

AQI/PRC/20 BK

AQI/PRC/20 BK

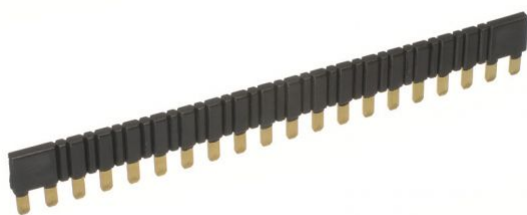

External cross-connector insulated for Plug-Relay-Compact (PRC), 20-pole, can be shortened, Voltage: 250 V, Current: 36 A

Business data

Product description	Insulated external cross-connector
Packaging unit	1
Quantity unit	PC
Weight per piece (not including packaging)	7.8
Weight per piece (including packaging)	9.8
Unit of weight	G
Customs number	85389099
Country of origin	EEC

15545.4

AQI/PRC/20 BK

AQI/PRC/20 BK

Technical Data

Ratings

Max. voltage	250 V
--------------	-------

Rated current	36 A
---------------	------

Connection data

No. of poles	20
--------------	----

Materials

Insulation housing	Polyamide 6.6
--------------------	---------------

Flammability class UL 94	V-2
--------------------------	-----

Working temperature, min.	-40 °C
---------------------------	--------

Working temperature, max.	105 °C
---------------------------	--------