


5680.3

RS-SP 1 2000 mm OG

RS-SP 1 2000 mm OG

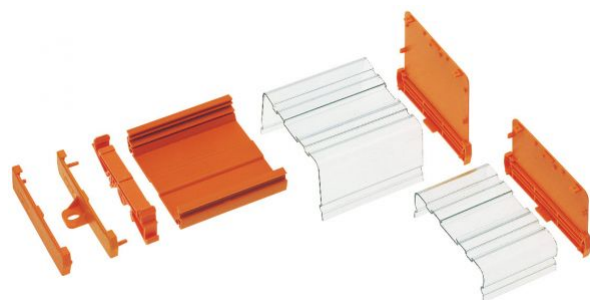

Extruded profile for locking base system, length: 2000 mm, lower part, width: 84 mm, PCB width: 68 or 73 mm,, colour: orange, Note: required profile length = PCB length - 4.5 mm

Business data

Product description	Extruded profile
Packaging unit	1
Quantity unit	M
Weight per piece (not including packaging)	370
Weight per piece (including packaging)	370
Unit of weight	G
Customs number	39162000
Country of origin	DE

5680.3

RS-SP 1 2000 mm OG

RS-SP 1 2000 mm OG

Technical Data

Dimensions

Length	2000 mm
Width	84 mm
Height	17 mm

Materials

Material	PVC
Flammability class UL 94	V-0
Working temperature, min.	-50 °C
Working temperature, max.	60 °C

Further technical data

Required profile length = PCB length	-4.5 mm
Min. PCB thickness	1.3 mm
Max. PCB thickness	1.7 mm
Min. PCB width of upper level	72.9 mm
Max. PCB width of upper level	73.4 mm
Min. PCB width of lower level	67.9 mm
Max. PCB width of lower level	68.4 mm