



Specifications:

1. Insulation Resistance: 100M Ohms min. (initial)
2. Contact Resistance (initial): 30m Ohm max at 100mA(max) 1KHz.
3. Dielectric Withstand Voltage: AC 250V, 50 to 60Hz for 1 minute.
4. Endurance: 5,000 Cycles  
10 ~ 20 cycles per minute.
5. Rated Voltage: 20.0 Volts DC
6. Rated Current: 2.5 Amps DC
7. Operating Temp: -25 to +85 deg. C.

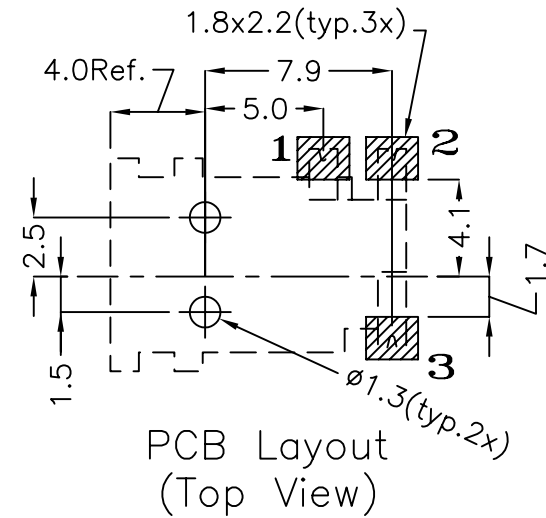

No.	Description	Material	Finish	Qty	Remark
4	Center Pin	Brass	Silver	1	40T
3	Shunt Terminal	Brass	Silver	1	40T
2	Spring Contact	Ti-Cu Alloy	Silver	1	30T
1	Plastic Housing	Polyamide	Black Color	1	UL94V-0

RoHS  
Compliant



9615 SW Allen, Suite 103  
Beaverton, OR 97005  
Phone: (503) 643-4899  
800-275-4899  
Fax: (503) 372-1266  
Website: www.cui.com

TITLE: <b>Ø1.65 DC Power Jack, Surface Mount</b>		
PART NO. PJ-021-SMT	UNITS: Millimeters	
DRAWN BY: Todd White	APPROVED BY:	SCALE: 3x