
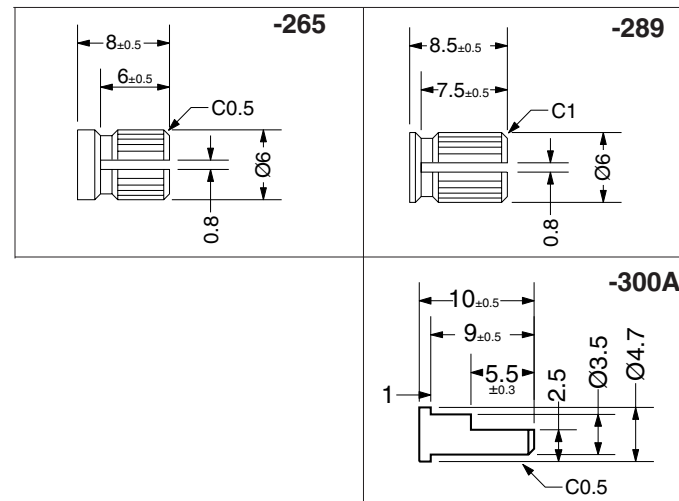
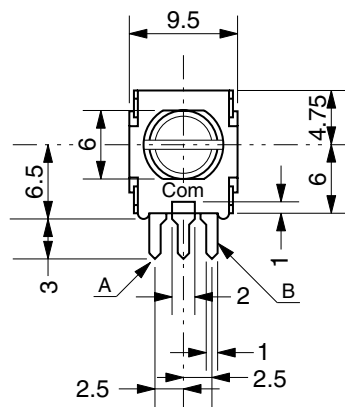


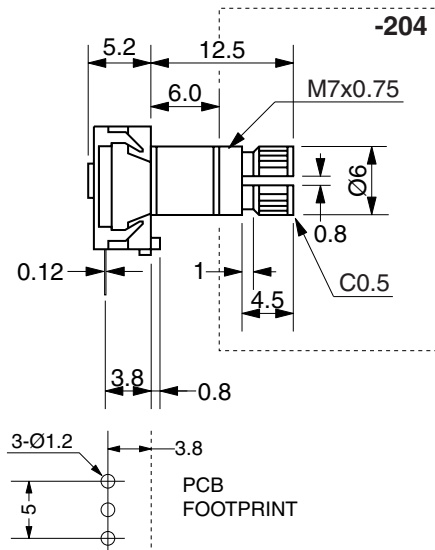

SPECIFICATIONS

ELECTRICAL

1. Voltage Rating: 10 VDC
2. Current Rating: 1.0 mA (2.5 mA max)
3. Resolution: 20PPR
4. Insulation Resistance: 500 VDC, 100M
5. Contact Resistance: 1Ω max.


MECHANICAL

1. Detent Positions: 20
2. Rotational Torque: 30-200 gf•cm
3. Axial Load: 10kgf
4. Rotational Life: 100,000 cycles

ENVIRONMENTAL

1. Operating Temp: -10° to +60° C
2. Storage Temp: -40° to +75° C
3. Humidity: 85% RH
4. Vibration: 10 - 55 Hz, 0.75 mm, 2 hrs

OUTPUT WAVEFORM

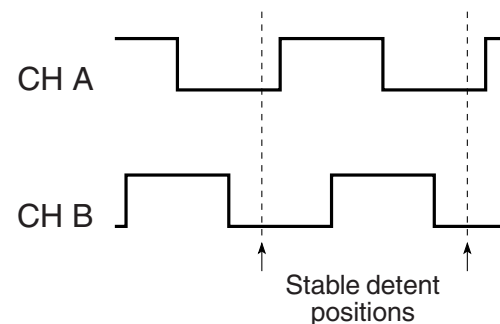


ORDERING INSTRUCTIONS

EC09P20H-XXX

Insert suffix to
specify shaft type

Sliding Noise

$t = 5\text{mS}$ = Masking time to avoid chatter
 $V_1 = V_2 = 2\text{V max.}$

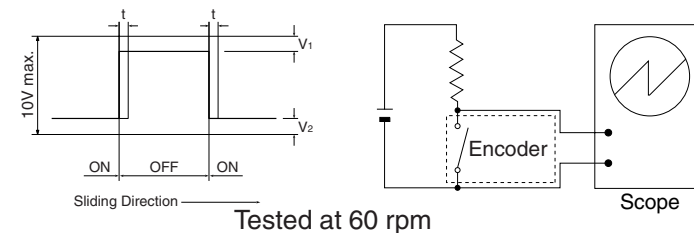

CUI INC

CUI Inc.

20050 SW 112th Ave.
Tualatin, OR 97062

Tel: 503/612-2300 FAX: 503/612-2383

DRAWN BY

JRH

UPDATED

01/23/08

CHECKED

01/23/08

UNIT

MM

PART NO.

EC09P20H-XXX

REV.

A