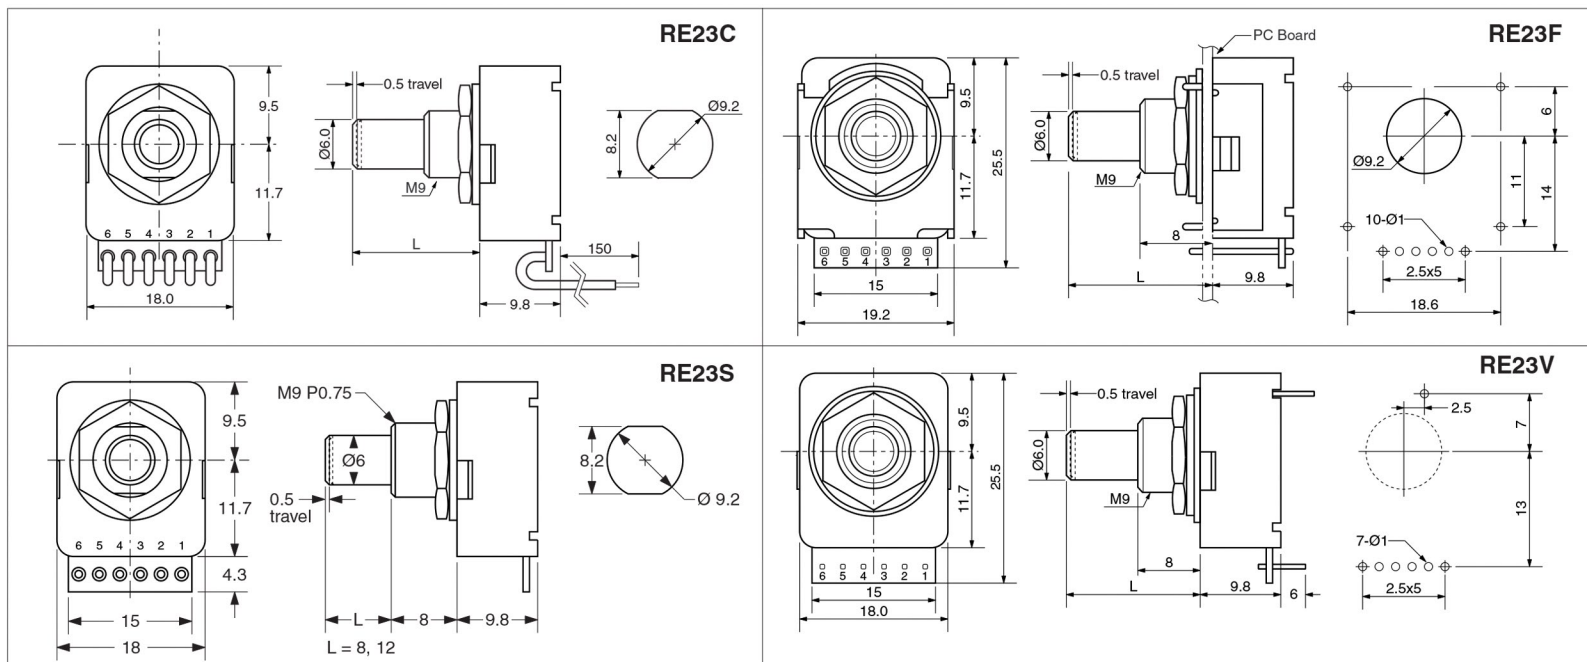


REV.	DESCRIPTION	DATE
A	NEW DRAWING	1/16/2008

**SPECIFICATIONS****ELECTRICAL**

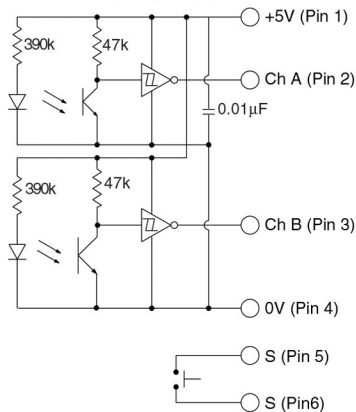
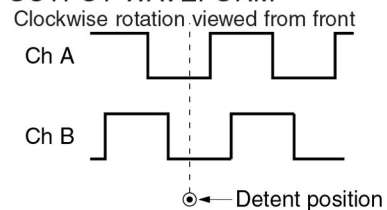
- Input Power: 5.0 VDC $\pm 10\%$ @ 10mA
3.3 VDC $\pm 10\%$ @ 10mA
- Output Voltage: H = Vcc-0.4V
L 0.4V
- Resolution: 16, 25 PPR
- Output Type: TTL/CMOS Compatible
- Max. Freq. Response: 500 Hz
- Push switch rating: 12VDC@20mA max.

MECHANICAL

- Max Shaft Load, radial: 1.0 kgf
axial: 1.0 kgf
- Rotational Angle: 360° continuous
- Click Torque: 100 gf cm max.
- Push switch actuation force: 300~700gf
- Rotational Life: 2.5×10^6 cycles

ENVIRONMENTAL

- Operating Temp: 0° to +60° C
- Storage Temp: -20° to +80° C
- Humidity: 85% RH, no condensation
- Vibration: 10~55 Hz, 1.5 mm, 2 hrs
- Shock: 50G, 6ms, 3 axes, 3 reps

OUTPUT CIRCUIT**OUTPUT WAVEFORM****ORDERING INSTRUCTIONS****RE23X X XX C XXRX**Type: _____
N: Non-Drip ProofDetent:
C: Detent OnlyInput Voltage:
A: 5V $\pm 5\%$ input
B: 3.3V input

Termination Options:

S: Solder Hole
C: Cable Type
V: Vertical Mount
F: Front MountResolution:
16: 16 PPR
25: 25 PPRShaft Length:
16: 16mm shaft
20: 20mm shaft**CUI INC**

20050 SW 112th Ave.
Tualatin, OR 97062
Phone: 503-612-2300
800-275-4899
Fax: 503-612-2383
Website: www.cui.com

TITLE:	panel mount optical encoder, push switch	REV:	A
PART NO.	RE23XXXXCXXRX	UNITS:	MM
DRAWN BY:	JRH	APPROVED BY:	
		SCALE:	

