



## SERIES: PRF20 | DESCRIPTION: DC-DC CONVERTER

### FEATURES


- up to 20 W isolated output
- 4:1 input range (43~160 V)
- smaller package
- single/dual regulated outputs
- meets European EN50155 railway standard
- 2,250 Vdc isolation
- continuous short circuit, over current protection, over voltage protection
- built-in remote on/off
- wide operating temperature range (-40~85°C)
- efficiency up to 90%



| MODEL          | input voltage |             | output voltage<br>(Vdc) | output current |          | output power<br>max (W) | ripple and noise <sup>1</sup><br>max (mVp-p) | efficiency<br>typ (%) |
|----------------|---------------|-------------|-------------------------|----------------|----------|-------------------------|----------------------------------------------|-----------------------|
|                | typ (Vdc)     | range (Vdc) |                         | min (mA)       | max (mA) |                         |                                              |                       |
| PRF20-Q110-S5  | 110           | 43~160      | 5                       | 0              | 4000     | 20                      | 75                                           | 88.5                  |
| PRF20-Q110-S12 | 110           | 43~160      | 12                      | 0              | 1670     | 20                      | 100                                          | 90                    |
| PRF20-Q110-S15 | 110           | 43~160      | 15                      | 0              | 1330     | 20                      | 100                                          | 89.5                  |
| PRF20-Q110-D12 | 110           | 43~160      | ±12                     | 0              | ±833     | 20                      | 100                                          | 89                    |
| PRF20-Q110-D15 | 110           | 43~160      | ±15                     | 0              | ±667     | 20                      | 100                                          | 88.5                  |

Note: 1. Ripple and noise are measured at 20 MHz BW by and 1μF ceramic capacitor across each output.

### PART NUMBER KEY

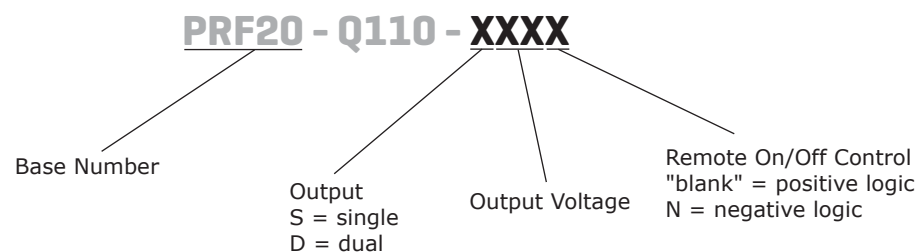

## INPUT

| parameter               | conditions/description                     | min                             | typ      | max | units      |
|-------------------------|--------------------------------------------|---------------------------------|----------|-----|------------|
| operating input voltage |                                            | 43                              | 110      | 160 | Vdc        |
| under voltage shutdown  | power up<br>power down                     |                                 | 40<br>38 |     | Vdc<br>Vdc |
| surge voltage           | for maximum of 100 ms                      |                                 |          | 200 | Vdc        |
| start-up time           | single output models<br>dual output models |                                 | 15<br>25 |     | ms<br>ms   |
| CTRL <sup>1</sup>       | positive logic                             | models ON (open or 3.5~75 Vdc)  |          |     |            |
|                         |                                            | models OFF (0~1.2 Vdc)          |          |     |            |
|                         | negative logic                             | models ON (0~1.2 Vdc)           |          |     |            |
|                         |                                            | models OFF (open or 3.5~75 Vdc) |          |     |            |
| filter                  | pi filter                                  |                                 |          |     |            |

Note: 1. Open collector refer to -Vin.

## OUTPUT

| parameter                  | conditions/description                            | min | typ | max   | units |
|----------------------------|---------------------------------------------------|-----|-----|-------|-------|
| maximum capacitive load    | 5V output model                                   |     |     | 5600  | μF    |
|                            | 12V output model                                  |     |     | 1000  | μF    |
|                            | 15V output model                                  |     |     | 1000  | μF    |
|                            | ±12V output model                                 |     |     | ±680  | μF    |
|                            | ±15V output model                                 |     |     | ±350  | μF    |
| line regulation            | from high line to low line                        |     |     | ±0.2  | %     |
| load regulation            | from full load to no load                         |     |     | ±0.5  | %     |
|                            | single output models<br>dual output models        |     |     | ±1    | %     |
| cross regulation           | dual output models, load cross variation 10%/100% |     |     | ±5    | %     |
| voltage accuracy           |                                                   |     |     | ±1.5  | %     |
| adjustability <sup>2</sup> |                                                   |     | ±10 |       | %     |
| switching frequency        |                                                   |     | 250 |       | KHz   |
| transient response         | 25% load step change                              |     |     | 250   | μs    |
| temperature coefficient    |                                                   |     |     | ±0.03 | %/°C  |

Note: 2. Output trimming available on single output models only

## PROTECTIONS

| parameter                | conditions/description                   | min | typ | max | units |
|--------------------------|------------------------------------------|-----|-----|-----|-------|
| short circuit protection | continuous                               |     |     |     |       |
| over current protection  |                                          | 110 |     | 160 | %     |
| over voltage protection  | protected by internal zener or TVS clamp |     |     |     |       |
|                          | 5V output model                          |     | 6.2 |     | Vdc   |
|                          | 12V output model                         |     | 15  |     | Vdc   |
|                          | 15V output model                         |     | 18  |     | Vdc   |
|                          | ±12V output model                        |     | ±15 |     | Vdc   |
|                          | ±15V output model                        |     | ±18 |     | Vdc   |

## SAFETY AND COMPLIANCE

| parameter            | conditions/description                               | min   | typ | max | units |
|----------------------|------------------------------------------------------|-------|-----|-----|-------|
| isolation voltage    | input to output for 1 minute                         | 2,250 |     |     | Vdc   |
| isolation resistance |                                                      | 1000  |     |     | MΩ    |
| safety approvals     | UL60950-1                                            |       |     |     |       |
| EMI/EMC              | EN55022 class A, EN50155 (external circuit required) |       |     |     |       |
| RoHS                 | 2011/65/EU                                           |       |     |     |       |


## ENVIRONMENTAL

| parameter             | conditions/description | min | typ | max | units |
|-----------------------|------------------------|-----|-----|-----|-------|
| operating temperature | see derating curve     | -40 |     | 85  | °C    |
| storage temperature   |                        | -55 |     | 125 | °C    |
| humidity              | non-condensing         |     |     | 95  | %     |
| case temperature      |                        |     |     | 105 | °C    |
| vibration             | EN50155 (EN61373)      |     |     |     |       |

## SOLDERABILITY

| parameter      | conditions/description     | min | typ | max | units |
|----------------|----------------------------|-----|-----|-----|-------|
| wave soldering | see wave soldering profile |     |     | 260 | °C    |

- Notes:
1. Soldering materials: Sn/Cu/Ni
  2. Ramp up rate during preheat: 1.4°C/s (from 50°C to 100°C)
  3. Soaking temperature: 0.5°C/s (from 100°C to 130°C), 60±20 seconds
  4. Peak temperature: 260°C, above 250°C for 3~6 seconds
  5. Ramp down rate during cooling: -10°C/s (from 260°C to 150°C)

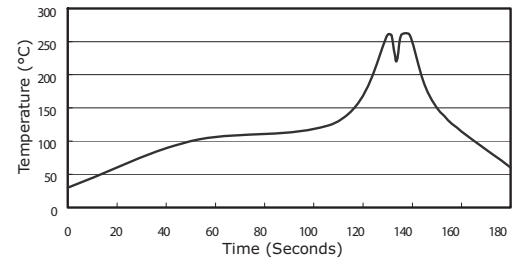

## MECHANICAL


| parameter     | conditions/description                       | min | typ | max | units |
|---------------|----------------------------------------------|-----|-----|-----|-------|
| dimensions    | 2.00 x 1.00 x 0.40 (50.8 x 25.4 x 10.2 mm)   |     |     |     | inch  |
| case material | black coated copper with non-conductive base |     |     |     |       |
| weight        |                                              |     | 35  |     | g     |

## MECHANICAL DRAWING

units: inch[mm]


tolerance: X.XX = ±0.02[±0.5]

X.XXX = ±0.010[±0.25]

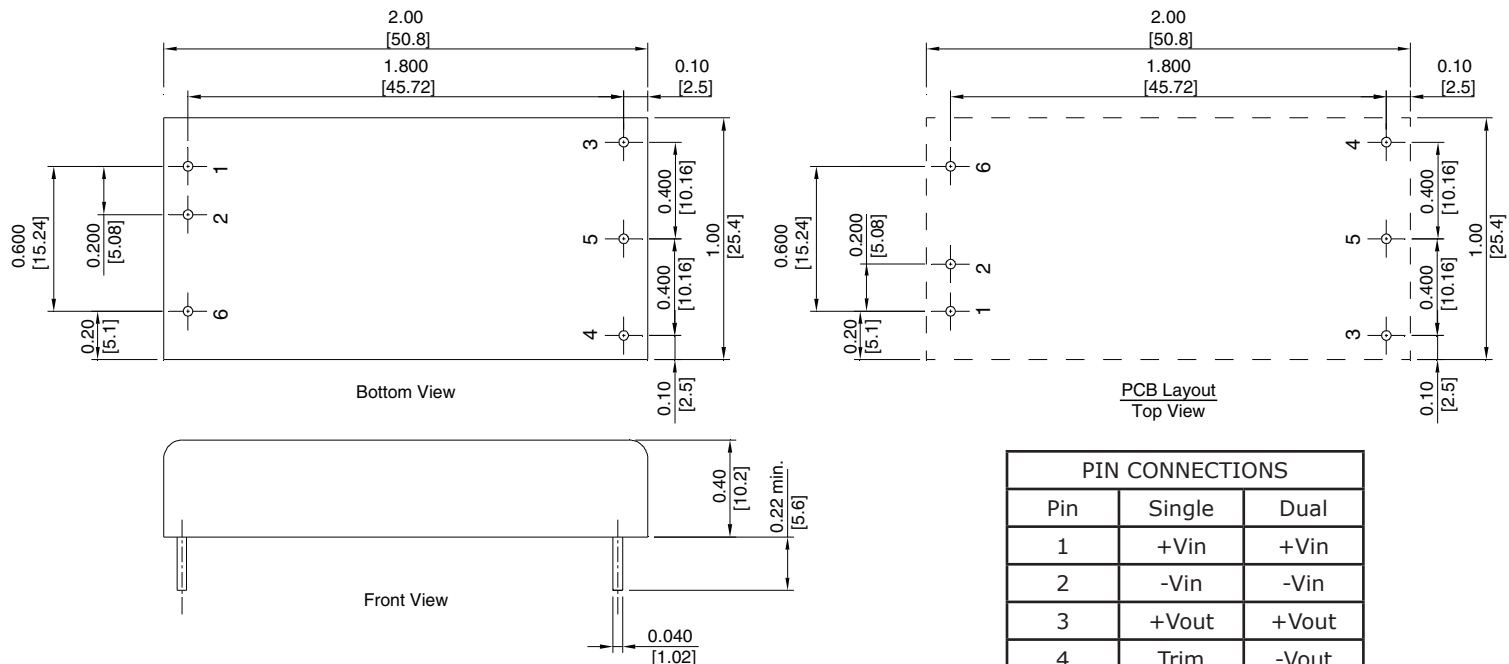1.3 mm Plated Through hole  
2.5 mm Pad Size

| PIN CONNECTIONS |               |        |
|-----------------|---------------|--------|
| Pin             | Single        | Dual   |
| 1               | +Vin          | +Vin   |
| 2               | -Vin          | -Vin   |
| 3               | +Vout         | +Vout  |
| 4               | Trim          | -Vout  |
| 5               | -Vout         | common |
| 6               | Remote ON/OFF |        |

## DERATING CURVES

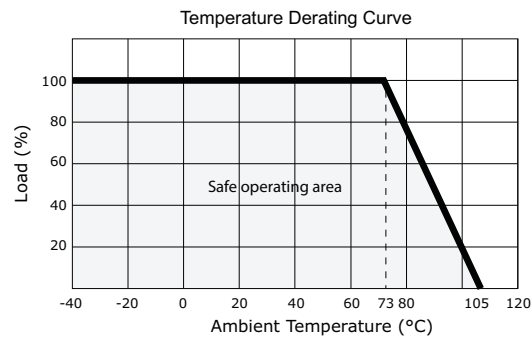

## EMC RECOMMENDED CIRCUIT

EN50155[EN50121-3-2]

Figure 1

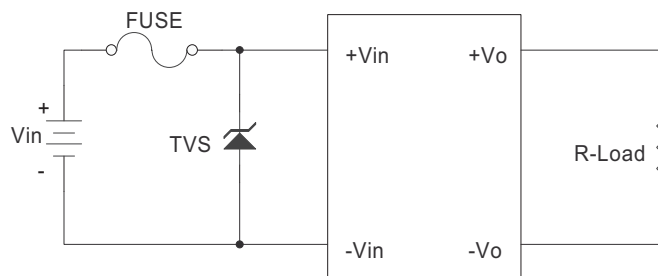


Table 1

|                     |
|---------------------|
| External components |
| 3A time delay fuse  |
| TVS                 |

## TEST CONFIGURATION

Figure 2

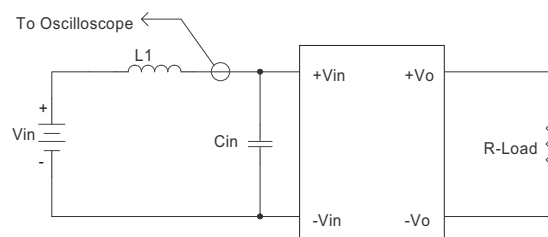


Table 2

|                     |                             |
|---------------------|-----------------------------|
| External components |                             |
| Lin                 | 12μH                        |
| Cin                 | 22μF, ESR < 0.2Ω at 100 KHz |

Note: Input reflected-ripple current is measured with an inductor L1 to simulate source impedance.


## APPLICATION NOTES

### Output Voltage Trimming

Leave open if not used.

**Figure 3**

Application Circuit for Trim pin

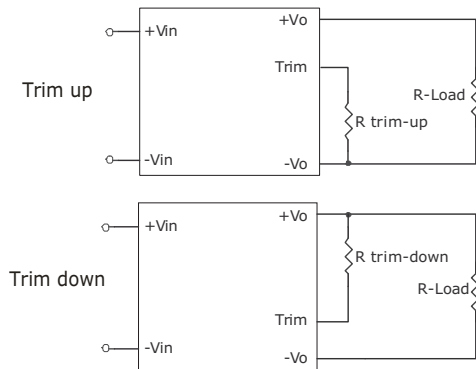

Formula for Trim Resistor

$$R_{trim - up} = \left( \frac{V_r \times R1 \times (R2 + R3)}{(V_o - V_{o, nom}) \times R2} \right) - R_t \text{ (K}\Omega\text{)}$$

$$R_{trim - down} = R1 \times \left( \frac{V_r \times R1}{(V_{o, nom} - V_o) \times R2} - 1 \right) - R_t \text{ (K}\Omega\text{)}$$

Note:  $R_{trim-up}$  is the external resistor in  $K\Omega$   
 $R_{trim-down}$  is the external resistor in  $K\Omega$   
 $V_{o, nom}$  is the nominal output voltage  
 $V_o$  is the desired output voltage  
 $R1, R2, R3, R_t$ , and  $V_r$  are internal (see table 3).

**Table 3**

| Vout<br>(Vdc) | R1<br>(K $\Omega$ ) | R2<br>(K $\Omega$ ) | R3<br>(K $\Omega$ ) | Rt<br>(K $\Omega$ ) | Vr<br>(V) |
|---------------|---------------------|---------------------|---------------------|---------------------|-----------|
| 5             | 2.32                | 2.32                | 0                   | 8.2                 | 2.5       |
| 12            | 6.8                 | 2.4                 | 2.32                | 22                  | 2.5       |
| 15            | 8.06                | 2.4                 | 3.9                 | 27                  | 2.5       |

## REVISION HISTORY

| rev. | description     | date       |
|------|-----------------|------------|
| 1.0  | initial release | 02/12/2014 |

The revision history provided is for informational purposes only and is believed to be accurate.

**CUI INC®**

**Headquarters**  
20050 SW 112th Ave.  
Tualatin, OR 97062  
**800.275.4899**

Fax 503.612.2383  
**cui.com**  
techsupport@cui.com

CUI offers a two (2) year limited warranty. Complete warranty information is listed on our website.

CUI reserves the right to make changes to the product at any time without notice. Information provided by CUI is believed to be accurate and reliable. However, no responsibility is assumed by CUI for its use, nor for any infringements of patents or other rights of third parties which may result from its use.

CUI products are not authorized or warranted for use as critical components in equipment that requires an extremely high level of reliability. A critical component is any component of a life support device or system whose failure to perform can be reasonably expected to cause the failure of the life support device or system, or to affect its safety or effectiveness.