



FAMILY OF REMOTE USB HUBS



ANYWHEREUSB PLUS

Connect USB peripheral devices anywhere on a Local Area Network (LAN) without a locally-attached host computer

IoT business automation requires communication with various IT assets and peripherals located across an enterprise. AnywhereUSB® Plus remote USB hubs give users the simplest and most direct connection options for existing equipment with a variety of USB 3.1 Gen 1 port options. All three models have Gigabit Ethernet support for failover redundancy and network bonding with SFP+ ports in the 8 and 24-port models for higher speeds or fiber networks.

AnywhereUSB 24 Plus is rack mountable with 24 USB 3.1 Gen 1 ports, while AnywhereUSB 8 Plus and AnywhereUSB 2 Plus are desktop or panel mountable units with eight or two ports, respectively, and support for Gigabit Ethernet.

AnywhereUSB can be coupled with Digi Remote Manager®, a web-based device configuration and security management platform, to help users reduce downtime. An intuitive user experience makes installation smooth and easy; with quick setup and configuration to monitor and maintain larger installations of remote Digi and third-party devices.

For enterprise and industrial customers who need remote or local USB ports and the higher speeds of USB 3.1 Gen 1 and Gigabit/10 Gigabit Ethernet, Digi AnywhereUSB Plus products give you an industry-leading connectivity solution.


FEATURES AND BENEFITS

- Network-attached USB hubs easily connect USB peripheral devices to a PC from remote or virtual hosts
- Ideal for connecting USB devices over the network in virtualized environments such as VMware®
- AnywhereUSB 24 Plus is rack mountable with two power supplies and Ethernet connections for failover redundancy
- Access and monitor USB and serial devices over TCP/IP connection
- Supports multi-host connectivity for each USB port or group independently
- Supports Digi Remote Manager® cloud-based management platform to deploy, monitor and manage devices

RELATED PRODUCTS



APPLICATION EXAMPLE

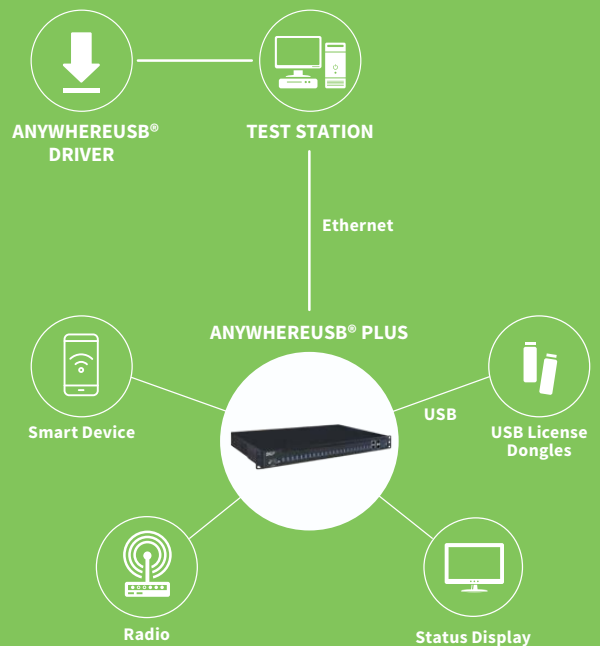


| SPECIFICATIONS | ANYWHEREUSB 2 PLUS | | ANYWHEREUSB 8 PLUS | | ANYWHEREUSB 24 PLUS | |
|--------------------------------|--|--|--------------------------------------|---|---------------------|--|
| CELLULAR | | | | | | |
| MODULE SUPPORT | - | (1) Digi CORE modem compliant socket | (1) Digi CORE modem compliant socket | | | |
| SOFTWARE AND MANAGEMENT | | | | | | |
| REMOTE MANAGEMENT | Digi Remote Manager® (cloud based) | | | | | |
| LOCAL MANAGEMENT | WebUI (HTTP/HTTPS); CLI (SSH) | WebUI (HTTP/HTTPS); CLI (Console, SSH) | | WebUI (HTTP/HTTPS); CLI (Console, SSH) | | |
| OPERATING SYSTEMS | Windows 7, Windows 8.1, Windows 10, Windows Server 2012 R2, Windows Server 2016, Windows Server 2019 | | | | | |
| PROTOCOLS | Supports multi-host connectivity for each USB port or group independently | | | | | |
| MEMORY | 512MB RAM, 4GB flash (eMMC) | 2GB RAM, 4GB flash (eMMC) | | 2GB RAM, 4GB flash (eMMC) | | |
| NETWORK | | | | | | |
| ETHERNET | (1) RJ-45; 10/100/1000 Mbps | (1) RJ-45; 10M/100M/1G/10G Ethernet | | (2) RJ-45; 10M/100M/1G/10G Ethernet | | |
| SFP+ | - | (1) SFP+ socket | | (2) SFP+ sockets | | |
| CONNECTORS | | | | | | |
| CONSOLE | - | (1) DB09M; RS-232 DTE | | | | |
| USB | (2) USB 3.1 Gen 1 Type A | (8) USB 3.1 Gen 1 Type A | | (24) USB 3.1 Gen 1 Type A | | |
| PHYSICAL | | | | | | |
| DIMENSIONS (L X W X H) | 118 mm x 74 mm x 30 mm (4.6 in x 2.9 in x 1.2 in) | 260mm x 160 mm x 44.45 mm (10 in x 6 in x 1.75 in) | | 450.85 mm x 255 mm x 44.45 mm (17.75 in x 10 in x 1.75 in) | | |
| WEIGHT | 0.38 kg (0.84 lb) | 1.58 kg (3.48 lb) | | 4.7 kg (10.36 lb) | | |
| STATUS LEDS | (2) Ethernet, 2 (x1) USB, power | (2) Ethernet, (2) SFP+ 8 (x1)USB, power, fan, user, (3) future Wi-Fi/WWAN | | 2 (x2) Ethernet, 2 (x2) SFP+, 24 (x1) USB, 2 (x1)PSU, 2 (x1) fan, user, (3) future Wi-Fi/WWAN | | |
| POWER REQUIREMENTS | | | | | | |
| POWER INPUT | 5 V, 5 A max | 12 V DC, 12 A max | | 100-240 V 3 A max (2 supplies for redundancy) | | |
| POWER CONSUMPTION | 25 watts max | 98.5 watts max | | 157.7 watts max | | |
| ENVIRONMENTAL | | | | | | |
| OPERATING TEMPERATURE | 0 °C to 40 °C (32 °F to 104 °F) | 0 °C to 55 °C (32 °F to 131 °F) | | 0 °C to 55 °C (32 °F to 131 °F) | | |
| RELATIVE HUMIDITY | 5% to 95% (non-condensing) | 5% to 95% (non-condensing) | | 5% to 95% (non-condensing) | | |
| APPROVALS | | | | | | |
| BLUETOOTH | - | Bluetooth BLE 4.2 | | | | |
| SAFETY | UL 60950, CSA 22.2 No. 60950, EN60950, EN62368 | UL/EN60950, UL/EN62368 and CSA 22.2 | | UL 60950, CSA 22.2 No. 60950, EN60950, EN62368 | | |
| EMISSIONS/IMMUNITY | CE, FCC Part 15 Class B, AS/NZS CISPR 22, EN55024, EN55032 | CE, FCC Part 15 Class B, AS/NZS CISPR 22, EN55024, EN55032 | | CE, FCC Part 15 Class B, AS/NZS CISPR 22, EN55024, EN55032 | | |
| WARRANTY | | | | | | |
| PRODUCT WARRANTY | 5-year | | | | | |


| ENTERPRISE SOFTWARE | DESCRIPTION |
|-------------------------|--|
| PROTOCOL SUPPORT | HTTPS, FTP, SFTP, SSL, SMTP, SSH and CLI for web management; remote management via Digi Remote Manager |
| SECURITY/VPN | TLS 1.2, SSH, HTTPS |
| ROUTING/FAILOVER | Ethernet bonding (only for AnywhereUSB 24 Plus) |
| OTHER PROTOCOLS | DHCP |

PRODUCT IMAGES


ANYWHEREUSB 2 PLUS FRONT

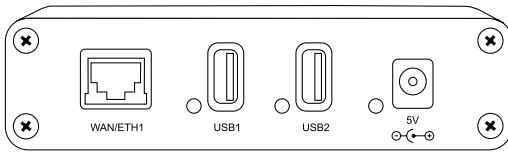


ANYWHEREUSB 2 PLUS BACK

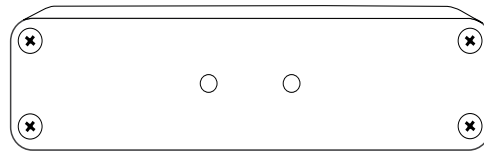


ANYWHEREUSB 8 PLUS FRONT

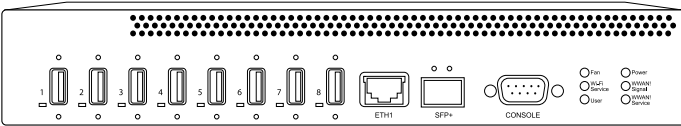


ANYWHEREUSB 8 PLUS BACK

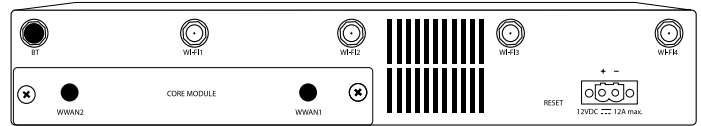

ANYWHEREUSB 24 PLUS FRONT



ANYWHEREUSB 24 PLUS BACK



PART NUMBERS

DESCRIPTION

ANYWHEREUSB 2 PLUS MODEL

AW02-G300

AnywhereUSB 2 Plus; dual USB 3.1 Gen 1 ports, single 10M/100M/1G Ethernet, 5 VDC

ANYWHEREUSB 8 PLUS MODEL

AW08-G300

AnywhereUSB 8 Plus; eight USB 3.1 Gen 1 ports, single 10M/100M/1G/10G Ethernet, single SFP+, 12 VDC

ANYWHEREUSB 24 PLUS MODEL

AW24-G300

AnywhereUSB 24 Plus; 24 USB 3.1 Gen 1 ports, dual 10M/100M/1G/10G Ethernet, dual SFP+, dual power 100-240 VAC

ACCESSORIES

DESCRIPTION

76000965

AC power supply - extd temperature, universal plugs (US, EU, UK, AU) to 5 VDC - 2.5 mm locking barrel plug

76000682

Mounting bracket - DIN rail mounting kit

FOR MORE INFORMATION
PLEASE VISIT DIGI.COM

DIGI SERVICE AND SUPPORT / You can purchase with confidence knowing that Digi is always available to serve you with expert technical support and our industry leading warranty. For detailed information visit www.digi.com/support.

© 1996-2019 Digi International Inc. All rights reserved.
All trademarks are the property of their respective owners.

91004384
A11/919

DIGI INTERNATIONAL WORLDWIDE HQ
877-912-3444 / 952-912-3444 / www.digi.com

DIGI INTERNATIONAL GERMANY
+49-89-540-428-0

DIGI INTERNATIONAL JAPAN
+81-3-5428-0261 / www.digi-intl.co.jp

DIGI INTERNATIONAL SINGAPORE
+65-6213-5380

DIGI INTERNATIONAL CHINA
+86-21-50492199 / www.digi.com.cn

DIGI