


Features

- Guard Ring Die Construction for Transient Protection
- Ideally Suited for Automatic Assembly
- Low Power Loss, High Efficiency
- Surge Overload Rating to 100A Peak
- For Use in Low Voltage, High Frequency Inverters, Free Wheeling, and Polarity Protection Application
- **Available in Lead Free Finish/RoHS Compliant Version (Note 4)**

Mechanical Data

- Case: SMA/SMB/SMC
- Case Material: Molded Plastic. UL Flammability Classification 94V-0
- Moisture Sensitivity: Level 1 per J-STD-020C
- Terminals: Solder Plated Terminal - Solderable per MIL-STD-202, Method 208
- Also Available in Lead Free Plating (Matte Tin Finish). Please See Ordering Information, Note 6, on Page 3
- Polarity: Cathode Band
- Marking: Type Number (See Page 3)
- Approximate Weight: SMA 0.064 grams
SMB 0.093 grams
SMC 0.21 grams

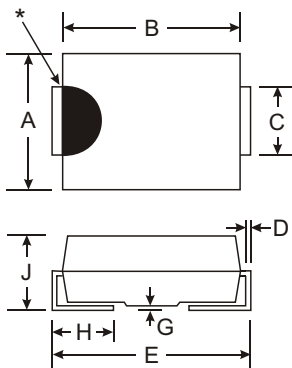

Dim	SMA		SMB		SMC	
	Min	Max	Min	Max	Min	Max
A	2.29	2.92	3.30	3.94	5.59	6.22
B	4.00	4.60	4.06	4.57	6.60	7.11
C	1.27	1.63	1.96	2.21	2.75	3.18
D	0.15	0.31	0.15	0.31	0.15	0.31
E	4.80	5.59	5.00	5.59	7.75	8.13
G	0.10	0.20	0.10	0.20	0.10	0.20
H	0.76	1.52	0.76	1.52	0.76	1.52
J	2.01	2.30	2.00	2.40	2.00	2.40
All Dimensions in mm						

"A" Suffix Designates SMA Package

"B" Suffix Designates SMB Package

No Suffix Designates SMC Package


*: Note: Device may have a semicircular indentation/notch on one side of the device (as shown).

Maximum Ratings and Electrical Characteristics @ T_A = 25°C unless otherwise specified


Single phase, half wave, 60Hz, resistive or inductive load.
For capacitive load, derate current by 20%.

Characteristic	Symbol	B320/A/B	B330/A/B	B340/A/B	B350/A/B	B360/A/B	Unit
Peak Repetitive Reverse Voltage Working Peak Reverse Voltage DC Blocking Voltage	V _{RRM} V _{RWM} V _R	20	30	40	50	60	V
RMS Reverse Voltage	V _{R(RMS)}	14	21	28	35	42	V
Average Rectified Output Current @ T _T = 100°C	I _O	3.0					A
Non-Repetitive Peak Forward Surge Current, 8.3ms single half sine-wave superimposed on rated load (JEDEC Method)	I _{FSM}	100					A
Forward Voltage (Note 3) @ I _F = 3.0A	V _{FM}	0.50			0.70		V
Peak Reverse Current @T _A = 25°C at Rated DC Blocking Voltage (Note 3) @T _A = 100°C	I _{RM}	0.5 20					mA
Typical Capacitance (Note 2)	C _T	250					pF
Typical Thermal Resistance, Junction to Terminal	R _{θJT}	10					°C/W
Typical Thermal Resistance, Junction to Ambient (Note 1)	R _{θJA}	50					°C/W
Operating Temperature Range	T _j	-55 to +125					°C
Storage Temperature Range	T _{STG}	-55 to +150					°C


- Notes:
1. Thermal Resistance: Junction to terminal, unit mounted on PC board with 5.0 mm², 0.013 mm thick, copper pad as heat sink.
 2. Measured at 1.0 MHz and applied reverse voltage of 4.0V DC.
 3. Short duration test pulse used to minimize self-heating effect.
 4. RoHS revision 13.2.2003. Glass and High Temperature Solder Exemptions Applied, see EU Directive Annex Notes 5 and 7.

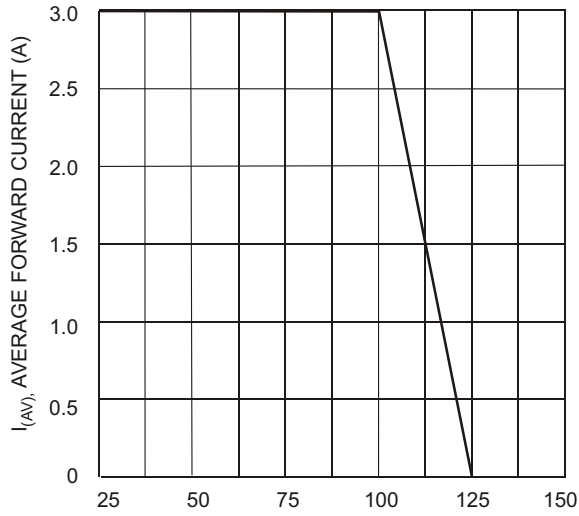

T_T , TERMINAL TEMPERATURE (°C)
Fig. 1 Forward Current Derating Curve

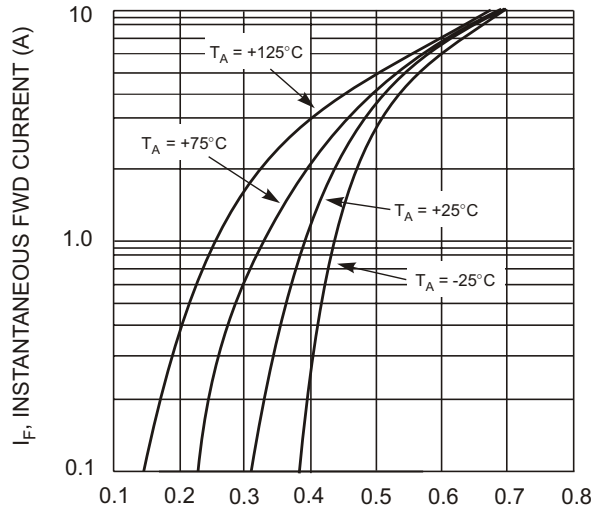

V_F , INSTANTANEOUS FORWARD VOLTAGE (V)
Fig. 2 Typical Forward Characteristics - B320/A/B thru B340/A/B

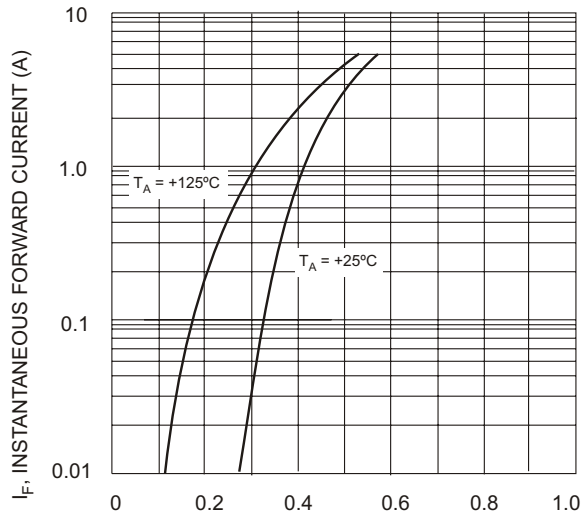

V_F , INSTANTANEOUS FORWARD VOLTAGE (V)
Fig. 3 Typ. Forward Characteristics - B350/A/B thru B360/A/B



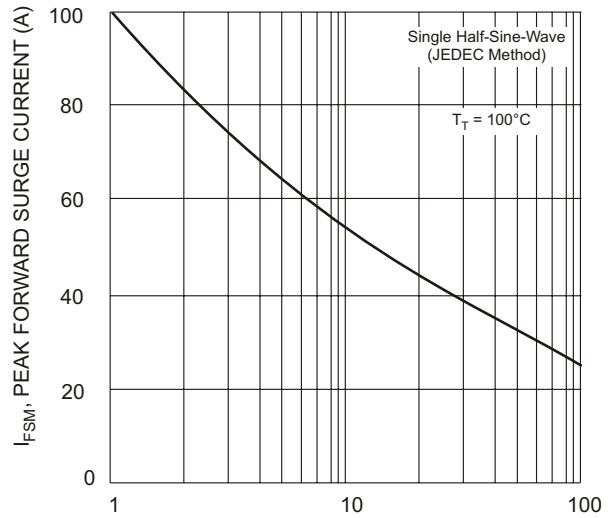



Fig. 4 Max Non-Repetitive Peak Fwd Surge Current

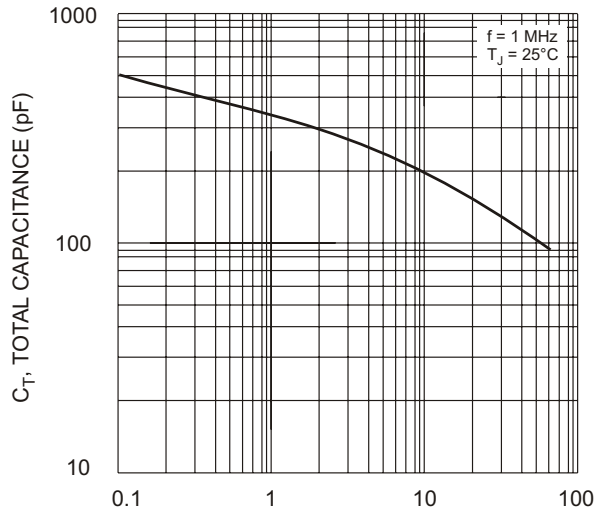

V_R , REVERSE VOLTAGE (V)
Fig. 5 Typical Capacitance

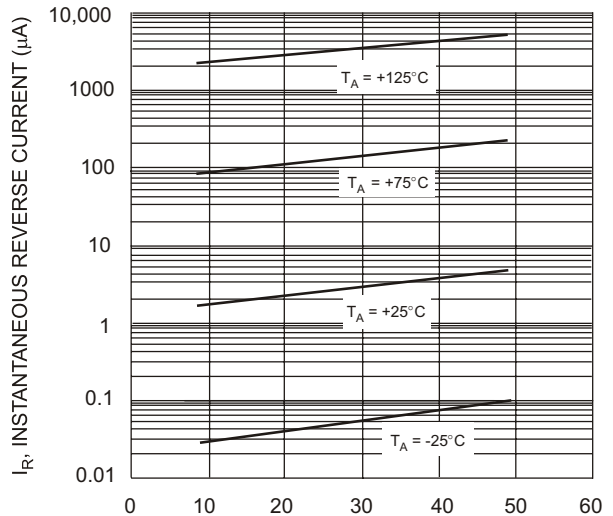


V_R , INSTANTANEOUS REVERSE VOLTAGE (V)
Fig. 6 Typical Reverse Characteristics, B320/A/B thru B340/A/B

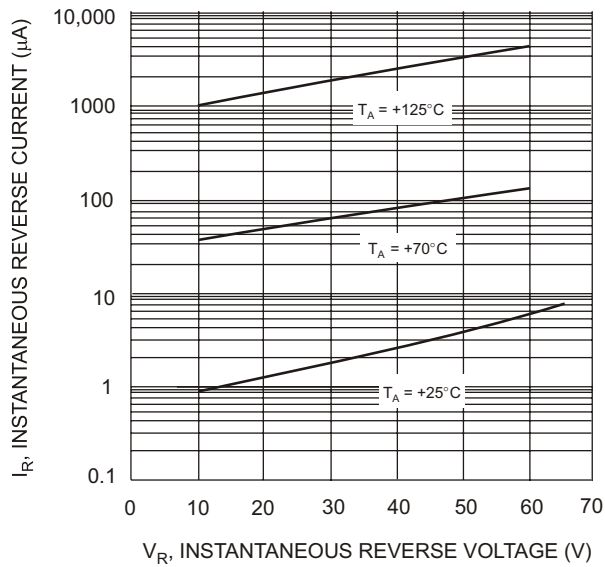

Ordering Information (Note 5 & 6)

Device*	Packaging	Shipping
B3XXA-13	SMA	5000/Tape & Reel
B3XXB-13	SMB	3000/Tape & Reel
B3XX-13	SMC	3000/Tape & Reel

Notes: 5. For Packaging Details, go to our website at <http://www.diodes.com/datasheets/ap02007.pdf>.
6. For Lead Free Finish/RoHS Compliant part number, please add "-F" suffix to the part number above. Example: B320A-13-F.
* xx = Device type, e.g. B320A-13 (SMA package); B320B-13 (SMB package); B320-13 (SMC Package).



BXXX = Product type marking code, ex: B320 (SMC package)
BXXXX = Product type marking code, ex: B320A (SMA package)
BXXX = Manufacturers' code marking
YWW = Date code marking
Y = Last digit of year ex: 2 for 2002
WW = Week code 01 to 52

Note: Device has a cathode band (as shown above) and may also have a cathode notch (as shown on Page 1).