

EAO – Your Expert Partner for Human Machine Interfaces

921-.401-0P - Keylock switch actuator 2 postions maintained rund, Func. 1, 3

921-.401-0P - Keylock switch actuator 2 postions maintained rund, Func. 1, 3



Attention: The preview is based on a sample product. This can differ from your current configuration.

Mounting

Mounting cut-out	Ø 16 mm
Design	raised

Front

Front dimension	Ø 24 mm
Front shape	round

Other Attributes

Weight	0,024 kg
--------	----------

Operating-/Indication part

Switching angle	90° right
-----------------	-----------

IP-Rating

Front protection	IP40
------------------	------

Connection Method

Terminal	PCB
----------	-----

Actuator

Switching action	Rest(a) - Maintain
------------------	--------------------

Switching element

Rotary positions	2
Switching system	Snap-action switching element
Contacts	1 NC + 1 NO
Switching current	5 A
Contact material	
Switching voltage	250 V AC


Function

Keylock switch	
----------------	--


EAO – Your Expert Partner for Human Machine Interfaces

921-.401-0P - Keylock switch actuator 2 postions maintained rund, Func. 1, 3


Dimensions




Mounting cut-outs



Wiring diagram

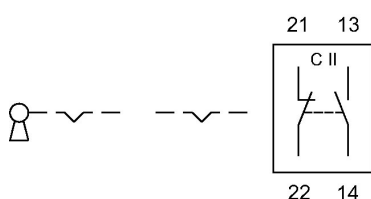

Component layout



Additional information

Standard lock B2 300

Further lock numbers see «Technical data»

Use the location strip no. 260-0020-00 for anti-twisting of the front bezel. At momentary position the overturning force is max. 60 Ncm.

Functions see chapter «Application guidelines»

Legend

Contacts: NC = Normally closed, NO = Normally open

Switching action: A = Rest, C = Maintained

EAO – Your Expert Partner for **Human Machine Interfaces**

921-.401-0P - Keylock switch actuator 2 postions maintained rund, Func. 1, 3

Switching positions

