
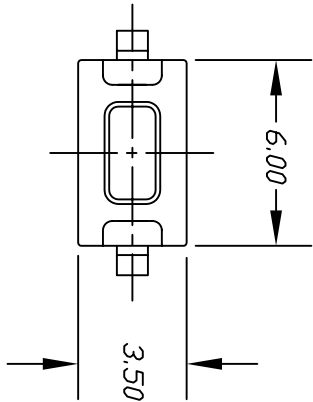

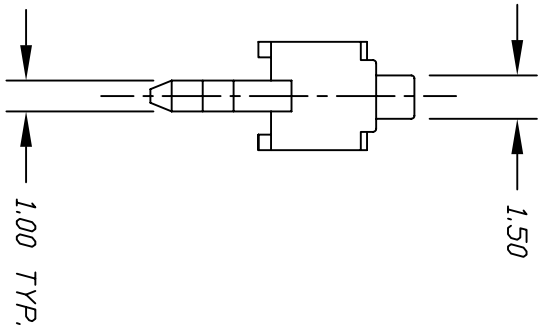


RECOMMEND P.C.B. HOLES

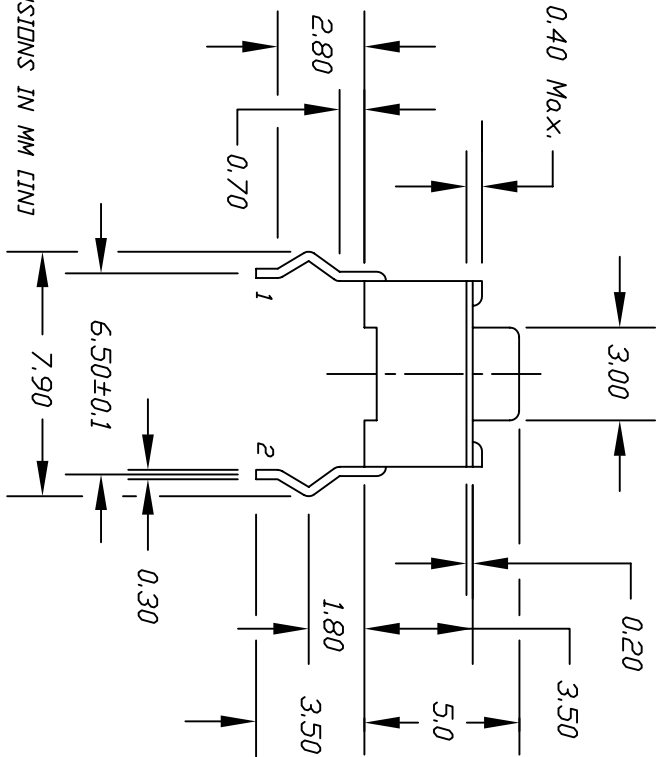

CIRCUIT: SPST
CONTACT CONFIGURATION

- NOTES:
1. ALL DIMENSIONS IN MM (IN)
 2. TERM. NOS. FOR REF ONLY
 3. RATING: DC 12V, 50mA
 4. TRAVEL: 0.25±0.1mm
 5. CONTACT RESISTANCE: 100m Ohms Max.
 6. MECHANICAL/ELECTRICAL LIFE: 30,000 CYCLES
 7. 2002/95/EC (ROHS) COMPLIANT
 8. PACKAGE: BULK 1,000 PER BAG

C	UPDATED NOTES	11/7/06	TN
---	---------------	---------	----

REV. B REVISSED & REDRAWN

REV. DESCRIPTION

DATE CHKD

THE INFORMATION CONTAINED IN THIS DOCUMENT IS PROPRIETARY TO E-SWITCH AND IS NOT TO BE COPIED OR TRANSFERRED

TOLERANCES	
±0.4	0.0
±0.25	0.00

E-SWITCH®

TITLE TL1107BF260W

SCALE 4:1

DATE 11/7/06

DR TN

DWG P010315

REV C