

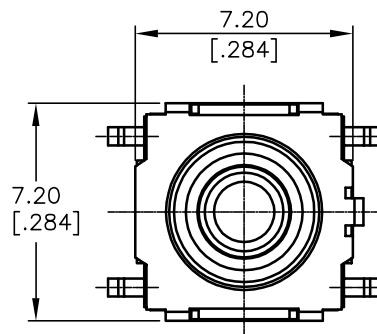

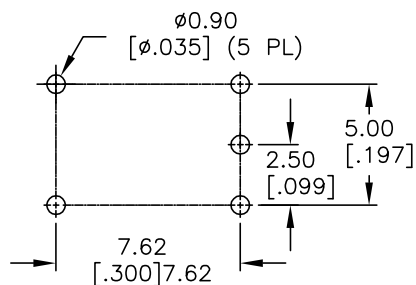
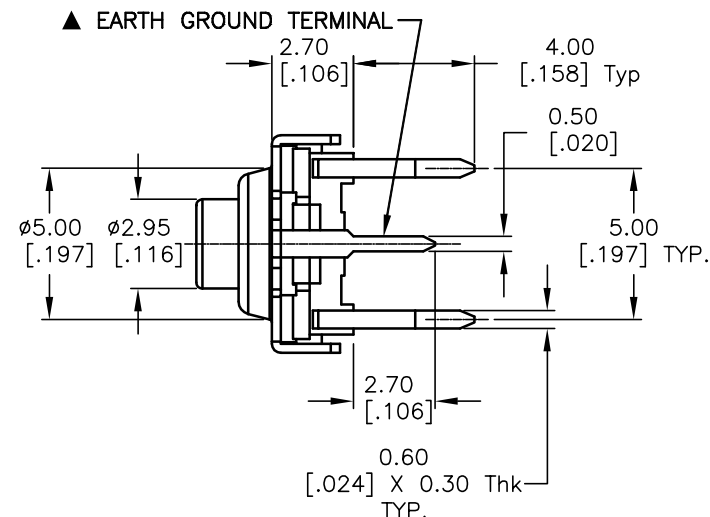
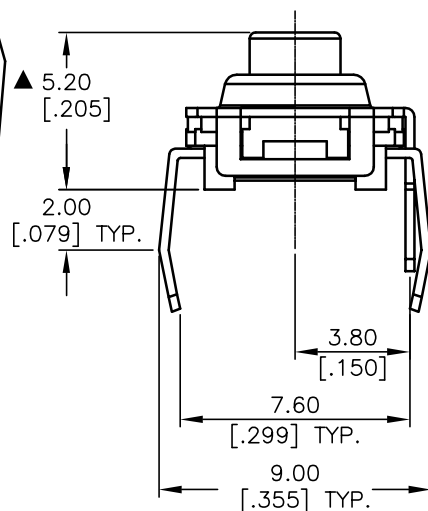


P.C.B LAND PATTERN




CIRCUIT DIAGRAM



NOTES:

1. ALL DIMENSIONS IN MM [INCH]
2. GENERAL TOLERANCE: X.X=±0.4
X.XX=±0.25
3. TERM. NOS. FOR REFERENCE ONLY.
- ▲ 4. OPERATING FORCE: 160±40gf
5. MECHANICAL/ELECTRICAL LIFE: 300,000 CYCLES
6. TRAVEL: 0.30 +0.4mm
7. SWITCH VOLTAGE(MAX.): 50V
8. SWITCH POWER(MAX.): 1VA
9. CONTACT RESISTANCE: 50MILLI Ω @ 5VDC.
10. INSULATION RESISTANCE: 10000M Ω min.
11. BOUNCE(MAX.): <5m SEC.
11. OPERATING TEMPERATURE: -40°C TO +85°C
12. STORAGE TEMPERATURE: -55°C TO +85°C
13. PACKAGING: TUBE
14. ▲ DONOTES CRITICAL PARAMETER.



D	13736	REMOVE SPACES IN DESC.	1/23/04	AR
C	13585	CHANGE ACTUATOR & DESCRIPTION	11/10/03	AR
B	13052	ADD NOTES, UPDATE STANDARDS	4/16/03	AR
A	13041	RELEASED FOR PRODUCTION	4/14/03	AR
REV.	ECN No.	DESCRIPTION	DATE	CHKD

THE INFORMATION CONTAINED IN THIS DOCUMENT
IS PROPRIETARY TO E-SWITCH AND IS
NOT TO BE COPIED OR TRANSFERRED

E-SWITCH®

TITLE

TL6105BF160QP

SCALE

4:1

DATE

3/27/03

DR

AR

DWG

D350500

REV

D