Fair-Rite Products Corp.

Your Signal Solution®

## Flat Cable Snap- Its (0443163951)



Part Number: 0443163951

43 FLAT CABLE CORE ASSEMBLY

Explanation of Part Numbers: - Digits 1 & 2 = Product Class - Digits 3 & 4 = Material Grade


Flat Cable Snap- Its for use on multi- conductor flat cables to suppress common- mode conducted EMI from 1MHz to hundreds of MHz. These Flat Cable Snap- Its are available in two ferrite materials, 31 and 43. The polypropylene cases are meeting the RoHS restrictions of hazardous substances and have a flammability rating of UL 94 V-0.

The Expanded Cable and Suppressor Kit (Part number 0199000005) contains several Flat Cable Snap- It assemblies.

**Catalog Drawing 3D Model** 

## Weight: 110 (g)

Dim	mm	mm tol	nominal inch	inch misc.	Cable Information				
А	68.00	+/- 2.00	2.677		Max	Max	Solid	Flat Cable	
В	51.00		2.008		Diameter	Dimension	Equivalent	Cores	
С	32.5	+/- 1.5	1.28	_	0	51.00 x 1.30		_	
D	7.90	+/- 0.5	0.311		0	C 1.00 A 1.00	<u> -</u>		

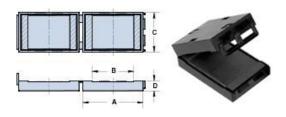


Max	Max	Solid	Flat Cable
Diameter	Dimension	Equivalent	Cores
0	51.00 x 1.30	_	-

Chart Legend + Test frequency		
Typical Impedance (Ω)		

Typical impedance	$(\mathbf{\Sigma}\mathbf{Z})$
10 MHz	50
$25 \text{ MHz}^+$	84
$100 \text{ MHz}^+$	178
250 MHz	300

Flat Cable Snap- It assemblies are controlled for impedances only. Minimum impedance values are specified for the + marked frequencies. The minimum impedance is typically the listed impedance less 20%.

Centered, single turn impedance tests on the 31 and 43 material parts are performed on the E4991A/HP4291B Impedance Analyzer. Cores are tested with the shortest practical wire length.

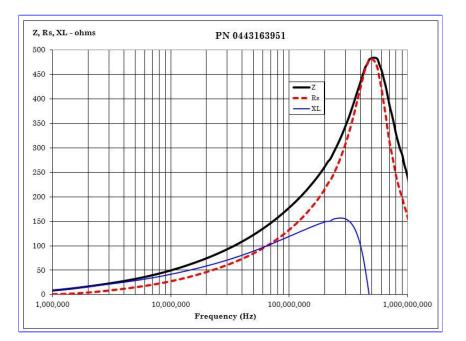

CSV Download

	Fai	r- Rite Products C	orp.		One Commercia	al Rov	v, Wallkill, New York 125	39-02	288
888-324-7748		845-895-2055		Fax	: 845-895-2629		ferrites@fair- rite.com		www.fair- rite.com