



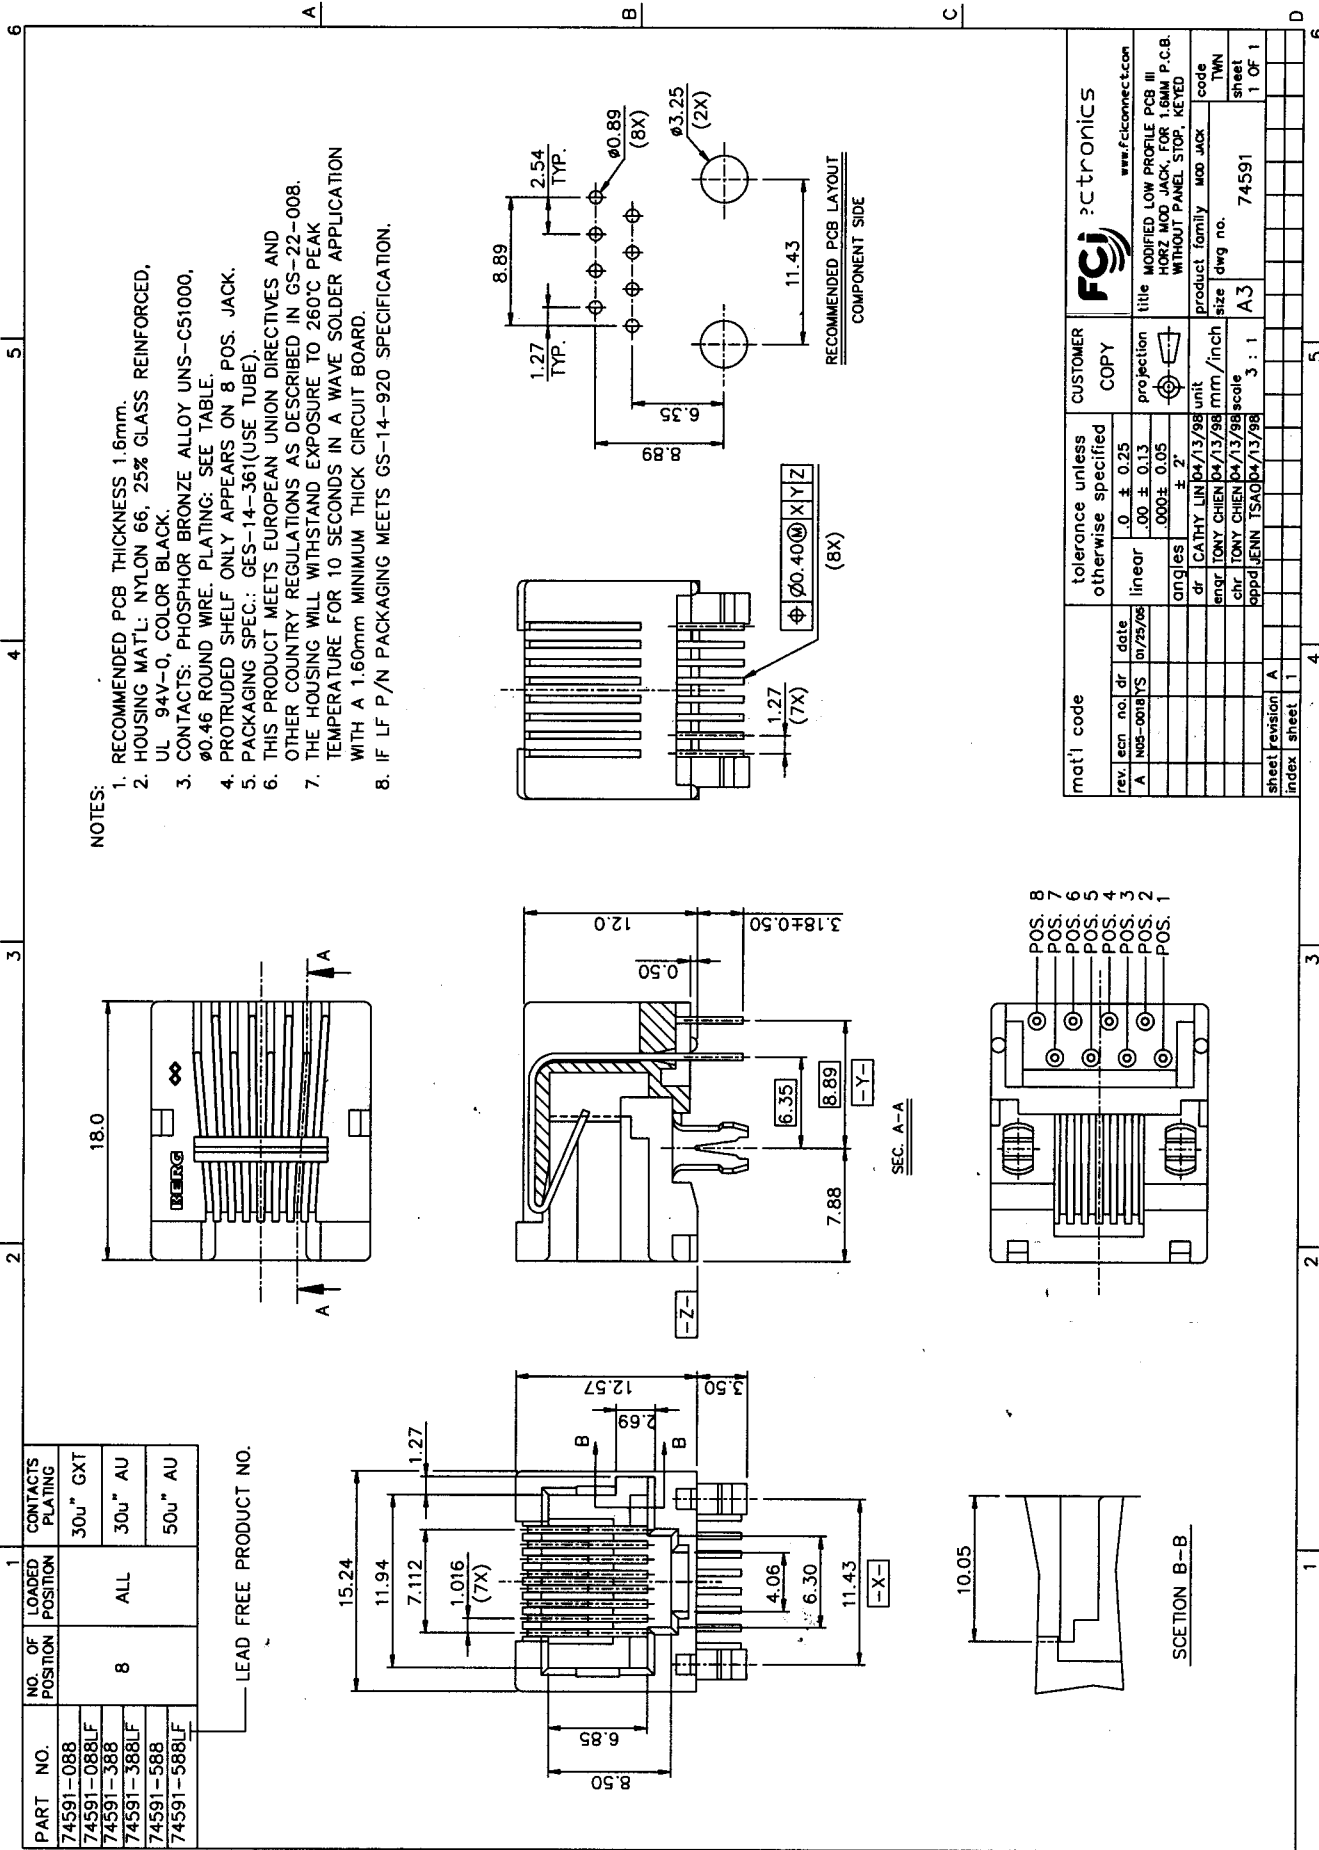

NOTES:

1. RECOMMENDED PCB THICKNESS 1.6mm.
2. HOUSING MATL: NYLON 66, 25% GLASS REINFORCED, UL 94V-0, COLOR BLACK.
3. CONTACTS: PHOSPHOR BRONZE ALLOY UNS-C51000, Ø0.46 ROUND WIRE. PLATING: SEE TABLE.
4. PROTRUDED SHELF ONLY APPEARS ON 8 POS. JACK.
5. PACKAGING SPEC.: GES-14-361(USE TUBE).
6. THIS PRODUCT MEETS EUROPEAN UNION DIRECTIVES AND OTHER COUNTRY REGULATIONS AS DESCRIBED IN GS-22-008.
7. THE HOUSING WILL WITHSTAND EXPOSURE TO 260°C PEAK TEMPERATURE FOR 10 SECONDS IN A WAVE SOLDER APPLICATION WITH A 1.60mm MINIMUM THICK CIRCUIT BOARD.
8. IF LF P/N PACKAGING MEETS GS-14-920 SPECIFICATION.



mat'l code				tolerance unless otherwise specified		CUSTOMER COPY		FCI Electronics	
rev.	ec'n no.	dr	date	linear	angular	projection	unit	title	www.fci.com
A	N05-0018	YS	07/25/98	0.00 ± 0.13	0.00 ± 0.05	Ø	mm/inch	MODIFIED LOW PROFILE PCB III	
								HORZ MOD JACK, FOR 1.6MM P.C.B. WITHOUT PANEL STOP, KEYED	
								product family	
								size	
								dwg no.	
								code	
								TWN	
								sheet	
								1 OF 1	
sheet revision	A							74591	
index	1							A3	