



A

B

C

D




A

B



C

D


view shown without plastic pin

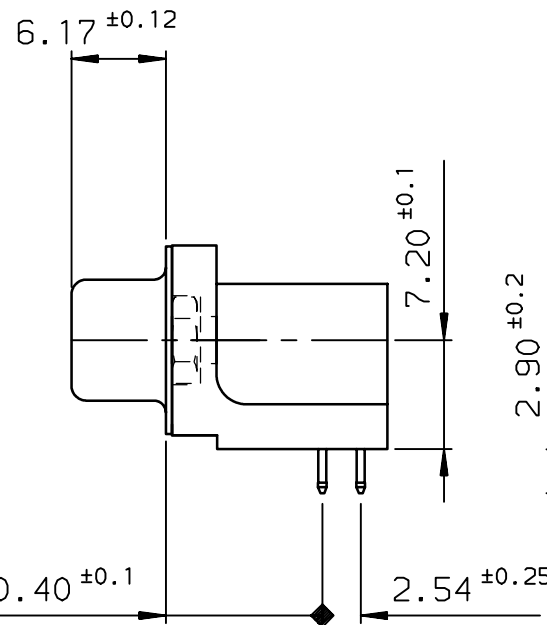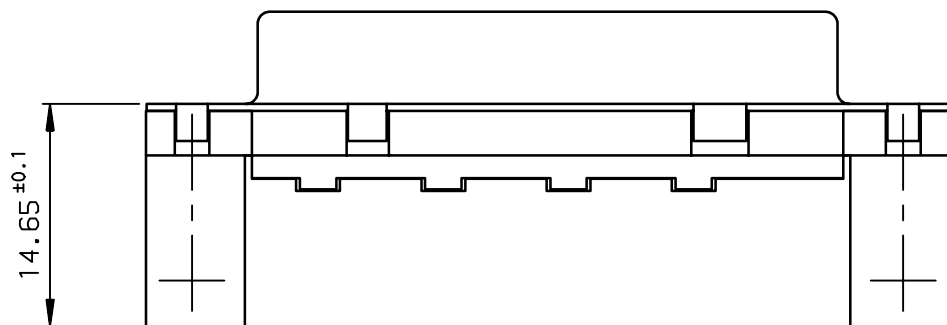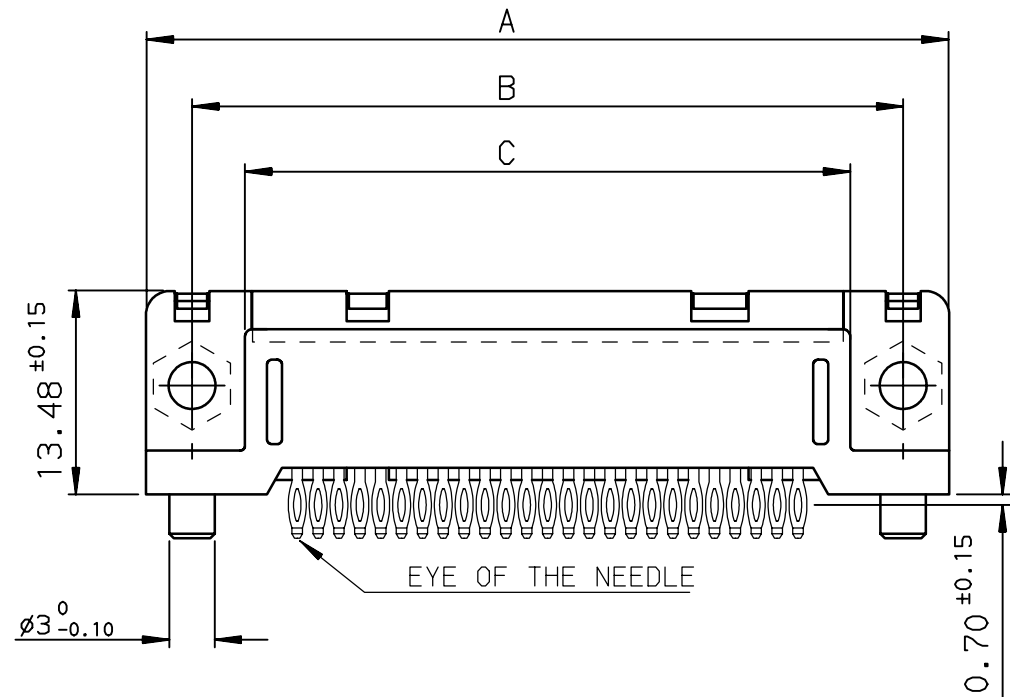

Detail of plastic pin

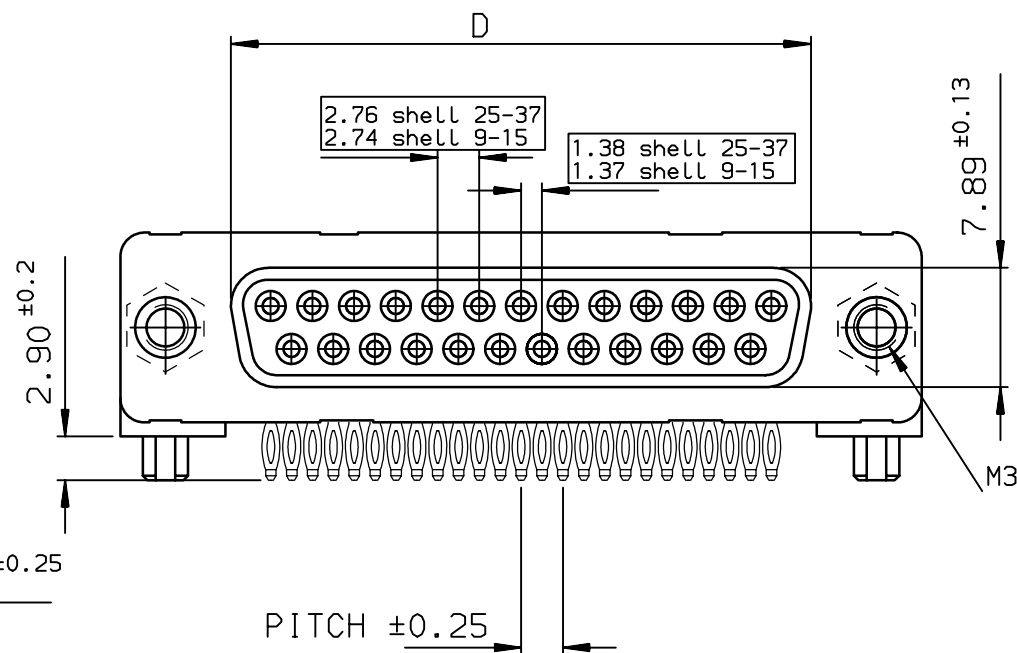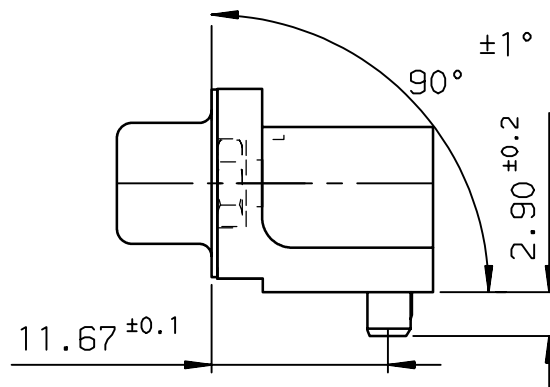

PC card drilling dimensions(after plating)
(thickness 1.60 ±0.20)

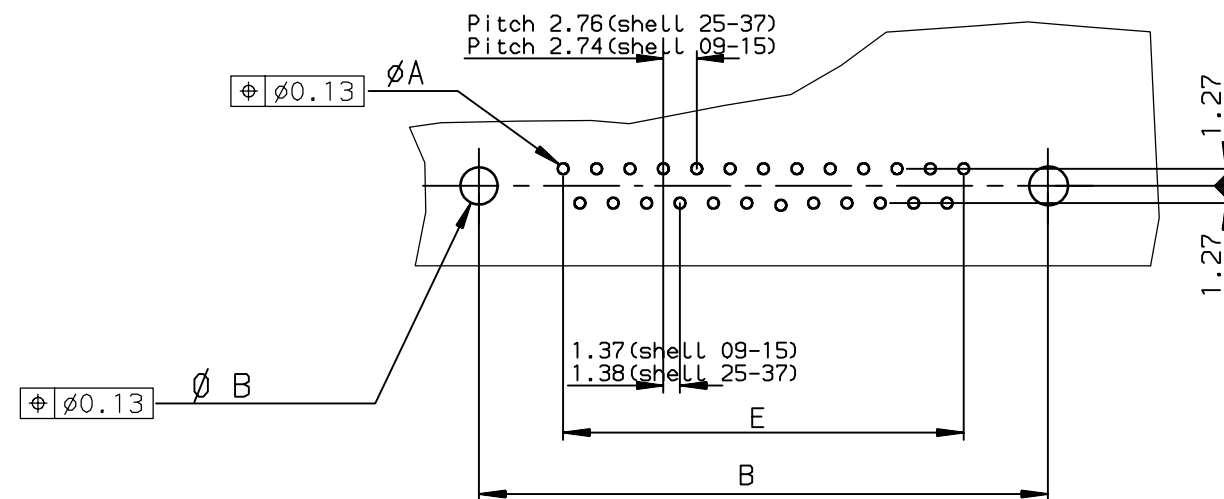

TIN LEAD PART NUMBER

SHELL	A±0.38	B±0.12	C±0.10	D±0.25	E±0.07	PART NUMBER	PART NUMBER
09	30.81	24.99	18.00	16.21	10.96	D09S81C4PL00	D09S81C6PL00
15	39.14	33.32	26.32	24.54	19.18	D15S81C4PL00	D15S81C6PL00
25	53.03	47.04	40.04	38.25	33.12	D25S81C4PL00	D25S81C6PL00
37	69.32	63.50	56.50	54.71	49.68	D37S81C4PL00	D37S81C6PL00
						Gold flash	0,76 µ gold

LEAD FREE PART NUMBER

SHELL	A±0.38	B±0.12	C±0.10	D±0.25	E±0.07	PART NUMBER	PART NUMBER
09	30.81	24.99	18.00	16.21	10.96	D09S81C4PL00LF	D09S81C6PL00LF
15	39.14	33.32	26.32	24.54	19.18	D15S81C4PL00LF	D15S81C6PL00LF
25	53.03	47.04	40.04	38.25	33.12	D25S81C4PL00LF	D25S81C6PL00LF
37	69.32	63.50	56.50	54.71	49.68	D37S81C4PL00LF	D37S81C6PL00LF
						Gold flash	0,76 µ gold

rev	ecn no	dr	date
B	-	MAS	1999/07/22
C	LS05-004	MPE	2005/02/14
D	-	-	-
E	LS06-0097	LGO	2006/07/28
F	LS06-0140	LGO	2006/09/22
-	-	-	-
-	-	-	-

GENERAL CHARACTERISTICS AND ROHS INFORMATIONS:

SEE DRAWING C01-8646-0001

www.fciconnect.com				surface ISO 1302	tolerance std ISO 406 ISO 1101	projection	mm
				TOLERANCES UNLESS OTHERWISE SPECIFIED			
Dr	BOUttIER	1997/10/22		ANGULAR	LINEAR	size	
Eng	PESSON	1997/10/22				A3	
Chr	LEGARE	1997/10/22		0.XX' ±2°		ECN	LS06-0140
Appr	LEGARE	1997/10/22		Product family		Spec ref	-
				FEMALE CONNECTOR DELTA D EUROPE		Rev.	
				right angled press fit		C01-8646-0576	
				catalog no		CUSTOMER sheet 1 of 1	