

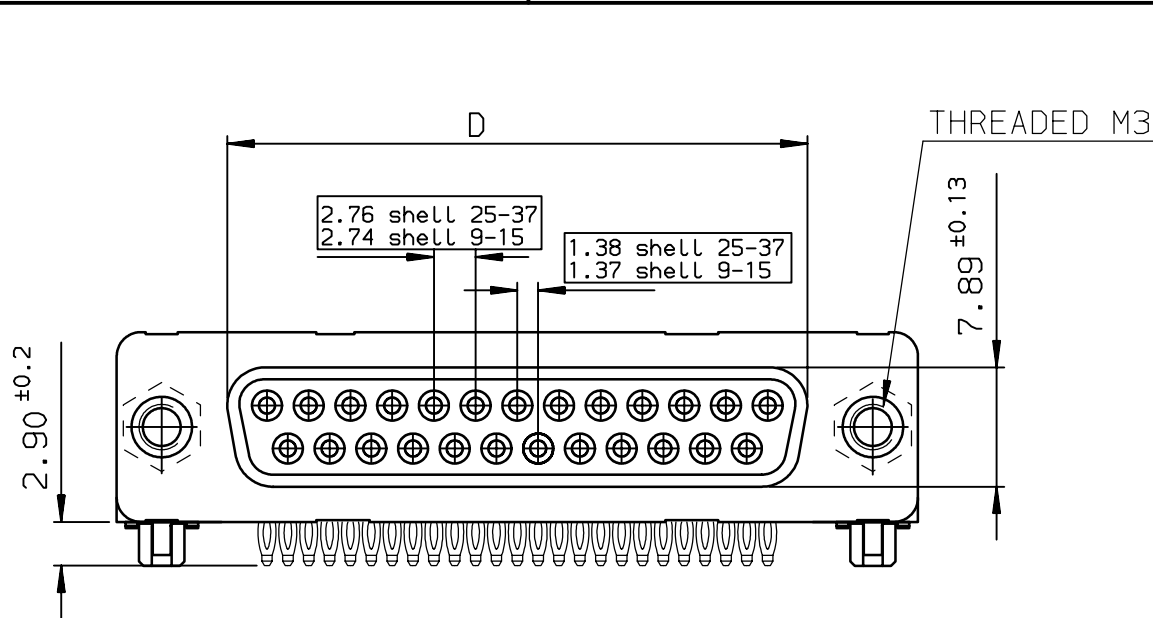
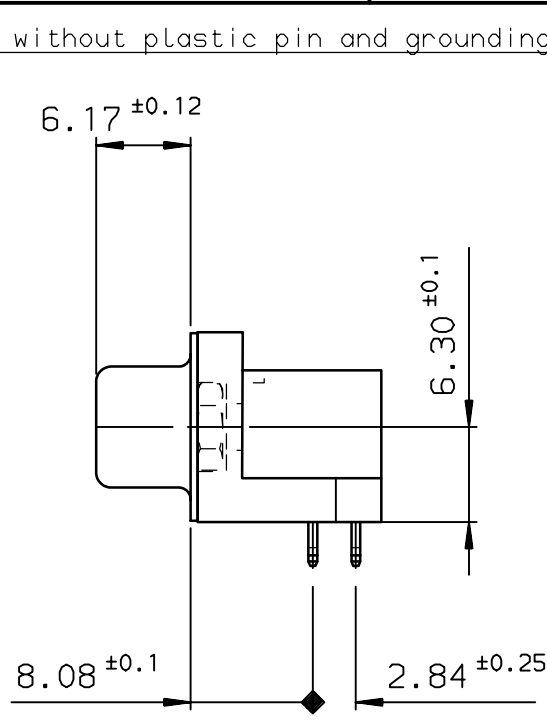



SHELL	A±0.38	B±0.12	C±0.10	D±0.25	E±0.07	TIN LEAD PART NUMBER	TIN LEAD PART NUMBER	LEAD FREE PART NUMBER	LEAD FREE PART NUMBER
09	30.81	24.99	18.00	16.21	10.96	D09S80C4GL00	D09S80C6GL00	D09S80C4GL00LF	D09S80C6GL00LF
15	39.14	33.32	26.32	24.54	19.18	D15S80C4GL00	D15S80C6GL00	D15S80C4GL00LF	D15S80C6GL00LF
25	53.03	47.04	40.04	38.25	33.12	D25S80C4GL00	D25S80C6GL00	D25S80C4GL00LF	D25S80C6GL00LF
37	69.32	63.50	56.50	54.71	49.68	D37S80C4GL00	D37S80C6GL00	D37S80C4GL00LF	D37S80C6GL00LF
						Gold flash	0,76 µ gold	Gold flash	0,76 µ gold

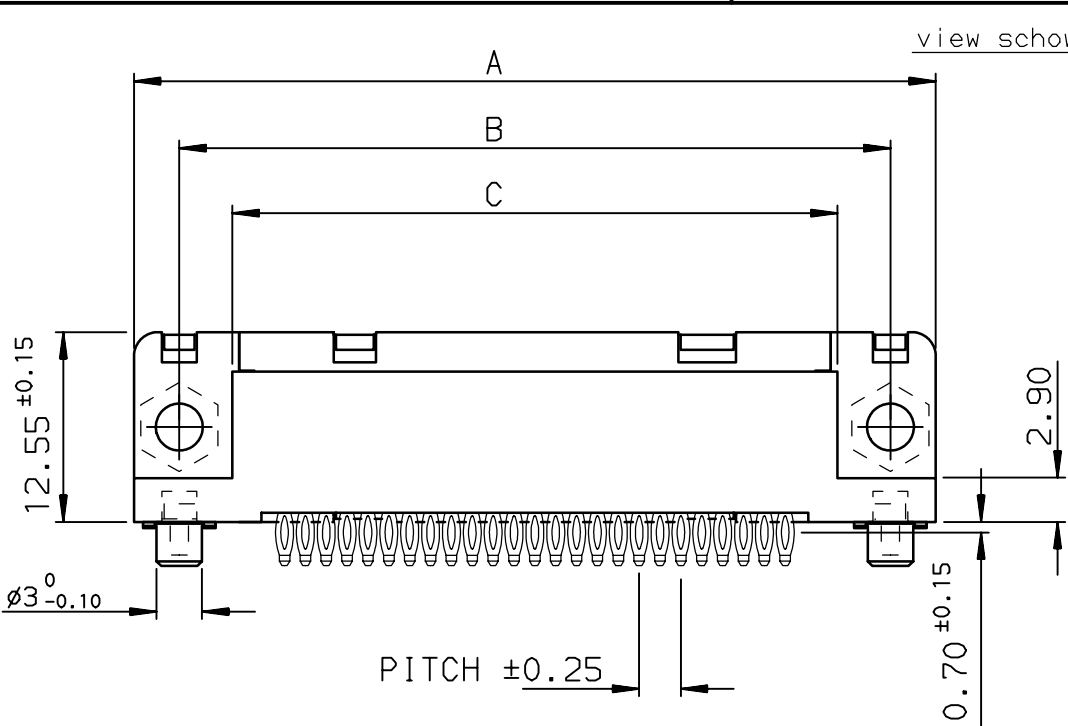

PC card drilling dimensions(after plating)
(thickness 1.60 ±0.25 mm)

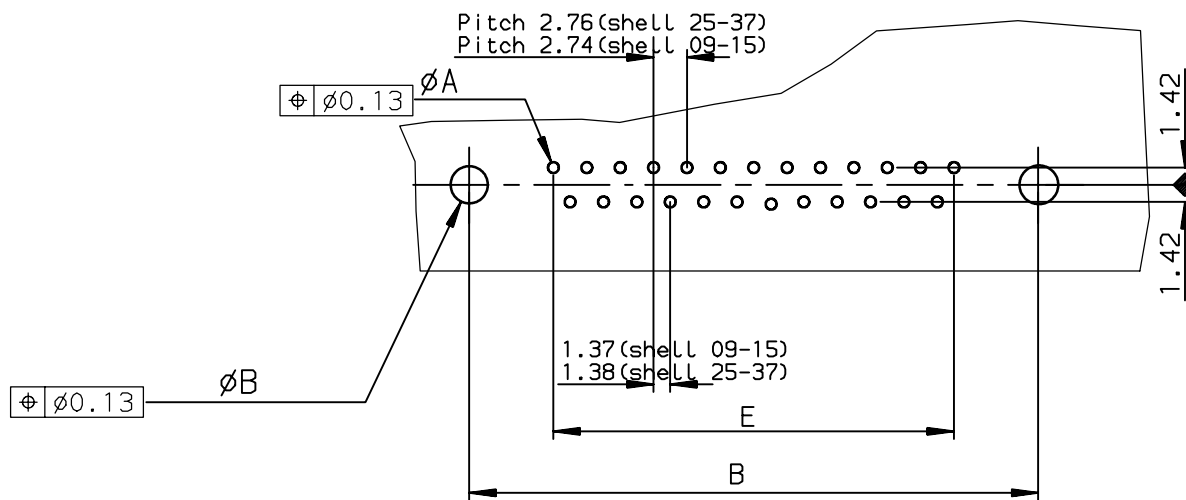


Detail of grounding strip

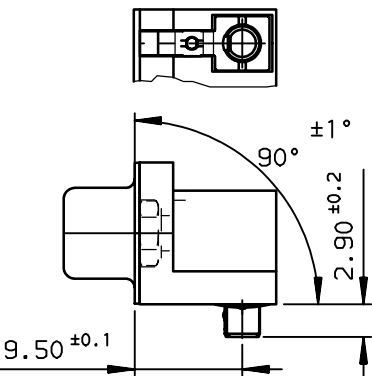

rev	ecn no	dr	date
D	-	MPE	2005/05/25
E	LS06-0097	LGO	2006/07/29
F	LS06-0140	LGO	2006/09/22
-	-	-	-
-	-	-	-
-	-	-	-
-	-	-	-

GENERAL CHARACTERISTICS AND ROHS INFORMATIONS:
SEE DRAWING C01-8646-0001

www.fciconnect.com			surface ISO 1302		tolerance std ISO 406 ISO 1101		projection 			
			TOLERANCES UNLESS OTHERWISE SPECIFIED							
Dr	PESSON	1995/10/30	ANGULAR	LINEAR	0.X	±0.1	size A3	Scale 2		
Eng	PESSON	1995/10/30			0.XX	±0.1				
Chr	LEGARE	1995/10/30			0.XX' ±2°	0.XXX		±0.1	ECN LS06-0140	
Appr	LEGARE	1995/10/30	Product family				D-SUB	Spec ref -		
			title FEMALE CONNECTOR DELTA D RIGHT ANGLED PR				dwg no C01-8646-0411	Rev. F		
			catalog no				-		CUSTOMER	