

## Single Phase Glass Passivated Silicon Bridge Rectifier

$V_{RRM} = 50\text{ V} - 400\text{ V}$

$I_O = 50\text{ A}$

### Features

- Integrally molded heat sink provides low thermal resistance for maximum heat dissipation
- High surge current capability
- Void-free junction soldering by using vacuum soldering
- Universal 3-way terminals: snap on, wire-around, or P.C board mounting
- High temperature soldering guaranteed: 260°C/ 10 seconds at 5 lbs (2.3 kg) tension
- Not ESD Sensitive

### Mechanical Data

Case: Molded plastic with heat sink integrally mounted in the bridge encapsulation

Terminals: Either nickel plated 0.25". Faston lugs or copper leads 0.040" diameter.


Polarity: Polarity symbols marked on the body

Mounting position: Bolt down on heat-sink with silicone thermal compound between bridge and mounting surface

Weight: 19 grams or 0.67 ounces

Mounting torque: 20 inch-lbs max

GBPC-T/W Package



**Maximum ratings at  $T_c = 25\text{ }^\circ\text{C}$ , unless otherwise specified (GBPCXXXXT uses GBPC-T package while GBPCXXXXW uses GBPC-W package)**

Parameter	Symbol	Conditions	GBPC50005T/W	GBPC5001T/W	GBPC5002T/W	GBPC5004T/W	Unit
Repetitive peak reverse voltage	$V_{RRM}$		50	100	200	400	V
RMS reverse voltage	$V_{RMS}$		35	70	140	280	V
DC blocking voltage	$V_{DC}$		50	100	200	400	V
Operating temperature	$T_j$		-55 to 150	-55 to 150	-55 to 150	-55 to 150	°C
Storage temperature	$T_{stg}$		-55 to 150	-55 to 150	-55 to 150	-55 to 150	°C

### Electrical characteristics at $T_c = 25\text{ }^\circ\text{C}$ , unless otherwise specified

Single phase, half sine wave, 60 Hz, resistive or inductive load

For capacitive load derate current by 20%

Parameter	Symbol	Conditions	GBPC50005T/W	GBPC5001T/W	GBPC5002T/W	GBPC5004T/W	Unit
Maximum average forward rectified current	$I_O$	$T_c = 50\text{ }^\circ\text{C}$	50.0	50.0	50.0	50.0	A
Peak forward surge current	$I_{FSM}$	single sine-wave	400	400	400	400	A
Maximum instantaneous forward voltage drop per leg	$V_F$	$I_F = 25\text{ A}$	1.2	1.2	1.2	1.2	V
Maximum DC reverse current at rated DC blocking voltage per leg	$I_R$	$T_a = 25\text{ }^\circ\text{C}$	5	5	5	5	$\mu\text{A}$
		$T_a = 125\text{ }^\circ\text{C}$	500	500	500	500	
Rating for fusing	$I^2t$	$1\text{ ms} < t_m < 8.3\text{ ms}$	1200	1200	1200	1200	$\text{A}^2\text{sec}$
RMS isolation voltage from case to leads	$V_{ISO}$		2500	2500	2500	2500	V
Typical junction capacitance	$C_j$		360	360	360	360	pF
Typical thermal resistance	$R_{\theta JC}$		1.2	1.2	1.2	1.2	°C/W

FIG.1-MAXIMUM OUTPUT RECTIFIED CURRENT

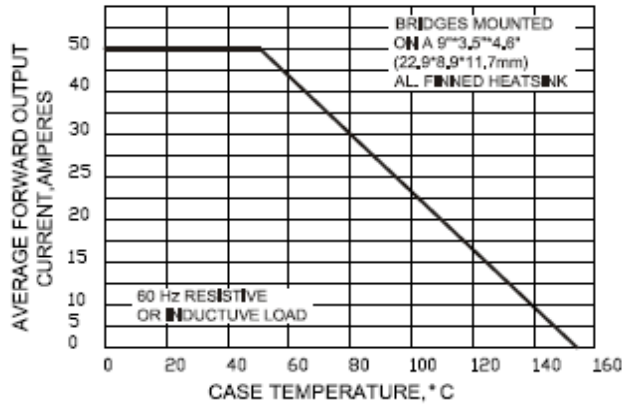


FIG.2-MAXIMUM OUTPUT RECTIFIED CURRENT

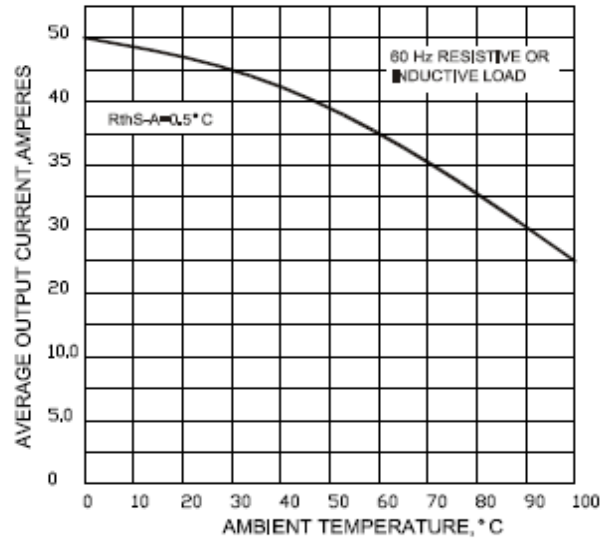


FIG.3-MAXIMUM POWER DISSIPATION

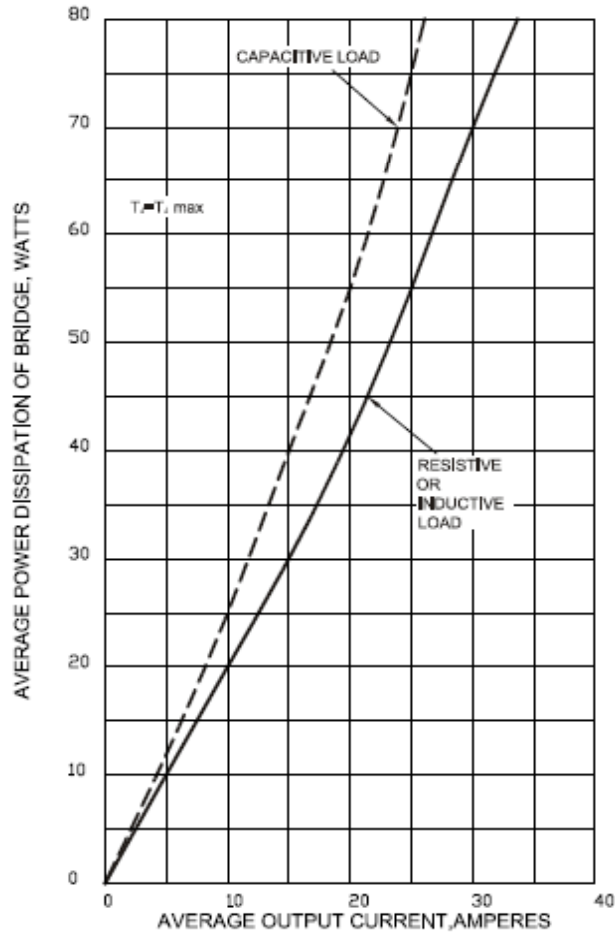


FIG.4-MAXIMUM NON-REPEITIVE PEAK FORWARD

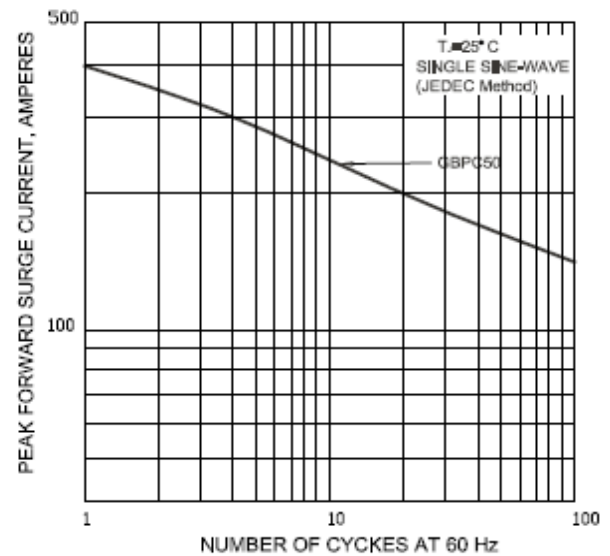


FIG.5-TYPICAL INSTANTANEOUS FORWARD CHARACTERISTICS PER LEG

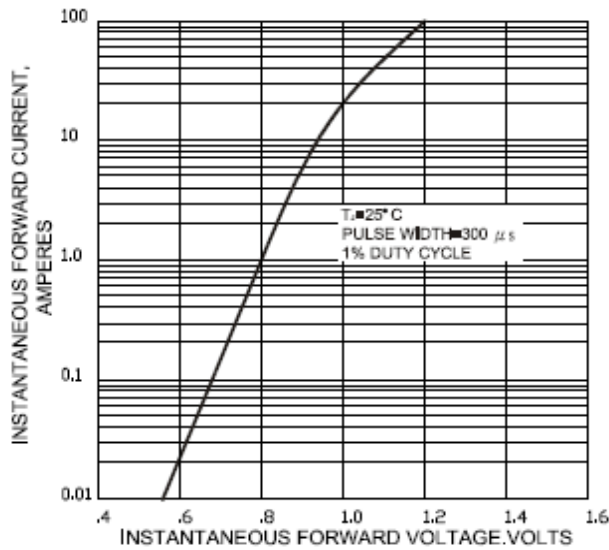


FIG.6-TYPICAL REVERSE CHARACTERISTICS

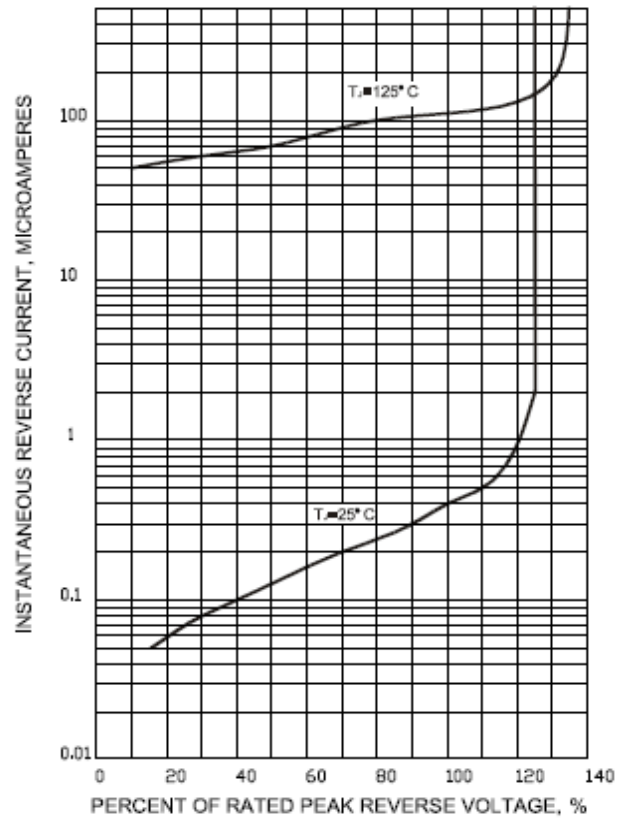


FIG.7-TYPICAL JUNCTION CAPACITANCE PER LEG



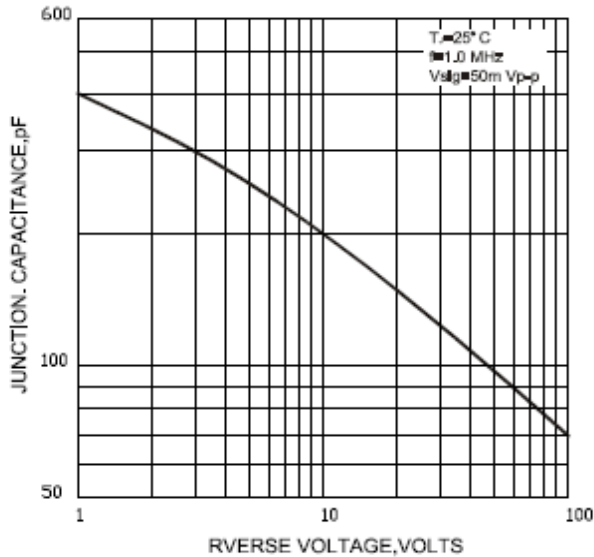


FIG.8-TYPICAL TRANSIENT THERMAL IMPEDANCE

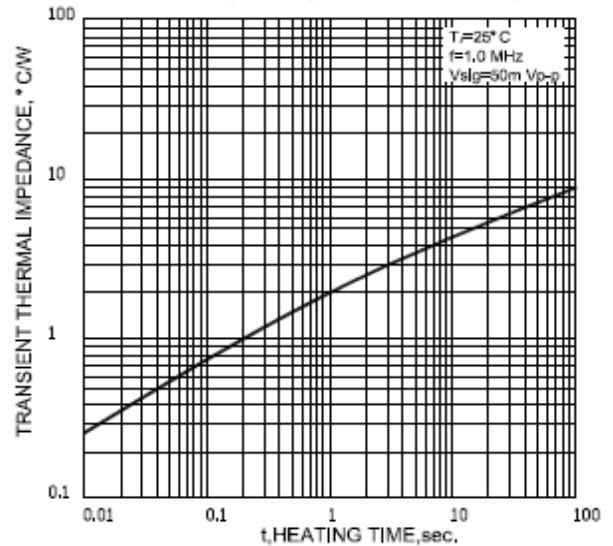

**Package dimensions and terminal configuration**

Product is marked with part number and terminal configuration.

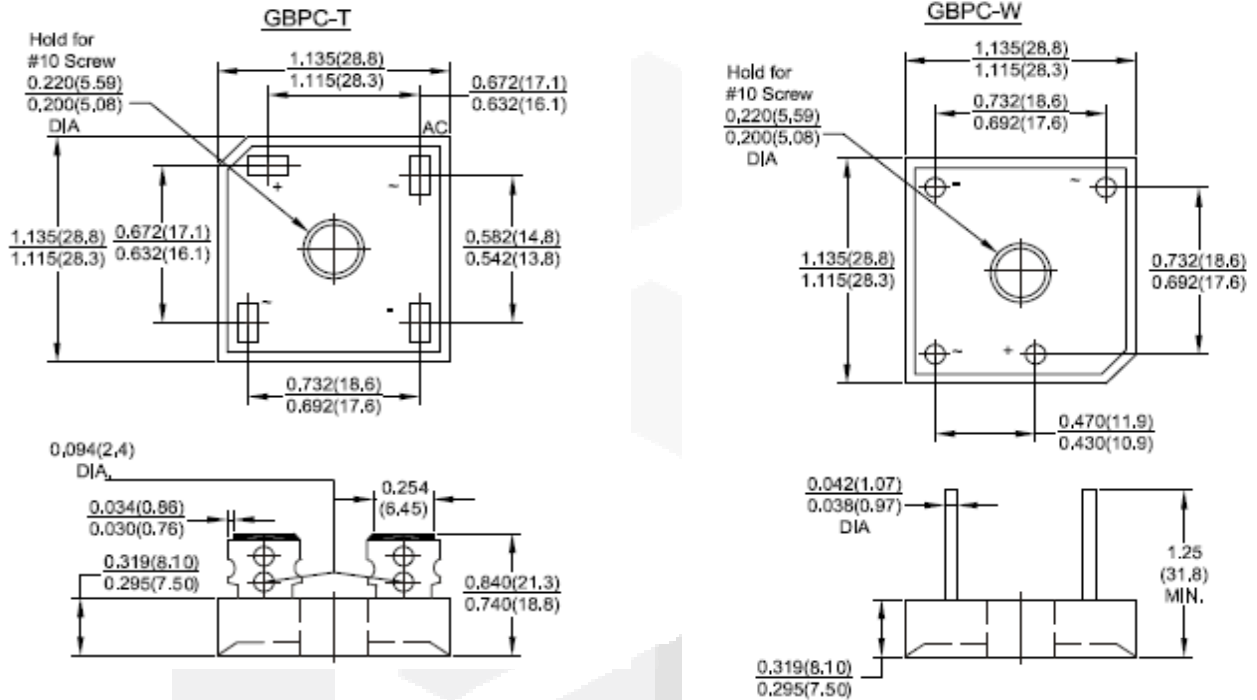

Dimensions in inches and (millimeters)

