


PROPRIETARY INFORMATION:
 PROPRIETARY OF GLOBTEK, INC. ANY REPRODUCTION, DISCLOSURE OR USE OF THIS DRAWING, IN WHOLE OR IN PART, IS HEREBY PROHIBITED EXCEPT AS SPECIFIED IN WRITING BY GLOBTEK, INC.

REVISION			
REV	DESCRIPTION	DATE	APPROVED
A	INITIAL RELEASE	09/17/18	BS

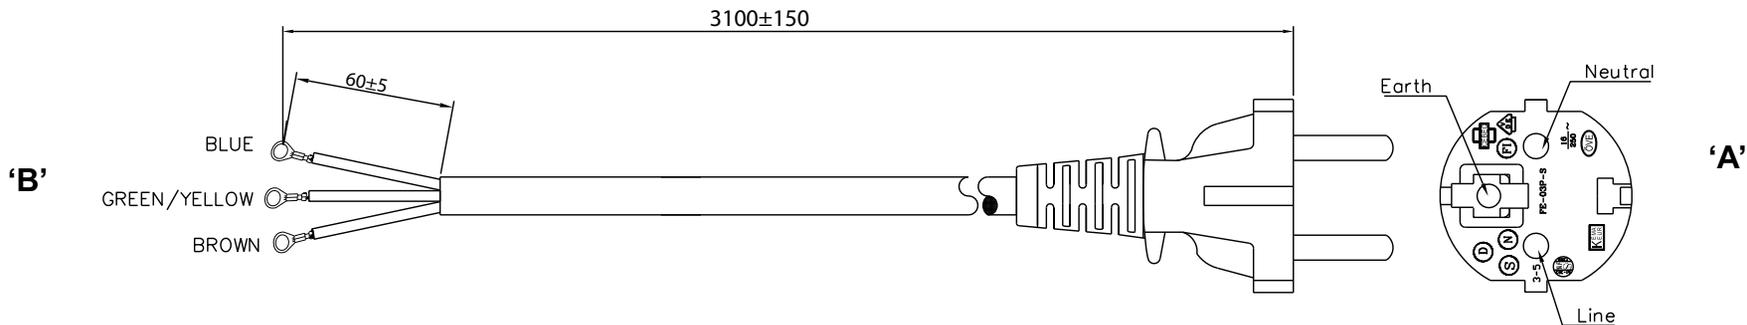


GENERAL SPECIFICATIONS:

RATING: 6A / 250V AC
 CABLE TYPE / SIZE: HO5RN-F, 3 x 0.75 mm²
 TEMPERATURE RATING: 70°C
 CONDUCTOR COLORS: BLUE / BROWN / GREEN-YELLOW
 CABLE JACKET COLOR: BLACK
 OVERALL LENGTH (L): 3100 ± 150 mm
 CABLE OUTER DIAMETER: 6.5 ± 0.1 mm
 END 'A' PLUG: CEE 7/7 STRAIGHT
 END 'B': SEE TERMINATION TABLE
 APPROVALS PLUG: VDE, N, S, D, FI, KEMA, NF, CEBC, OVE

PACKING:

HANKED:

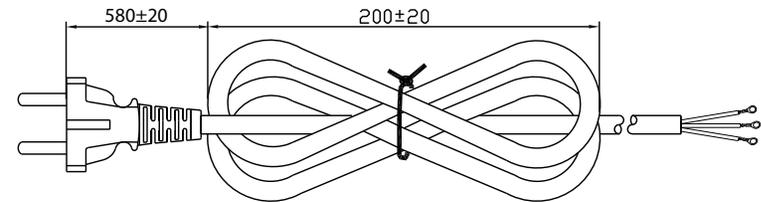


NOTES:

1. PLUG MUST BE MARKED WITH APPROVAL SYMBOLS OR FILE NUMBER(S).

CONDUCTOR TERMINATION TABLE:

WIRE	COLOR	ROJ ± 5 mm (F)	TERMINAL
NEUTRAL	BLUE	60	STRIPPED
LINE	BROWN	60	STRIPPED
GROUND	GREEN-YEL	60	STRIPPED



RELEASED
 By N.Frost at 8:11 am, Sep 18, 2018

DASH NO.	PART NO	REV.	DESCRIPTION	NOTES
TABULATION BLOCK				
REV.			TOLERANCES: DECIMALS ANGULAR .xx +/- 0.1 +/- 1° .xxx +/- .005	GlobTek, Inc. www.globtek.com 186 Veterans Dr. Northvale, NJ 07647 Tel. 201-784-1000 Fax 201.784.0111
SHEET				
INIT.BY: BS		DATE: 09/16/17	DWG TITLE: EUROPEAN NON-DETACHABLE CORDSET	
DRAWN: NF		DATE: 09/16/17	FSCN No.: G, CC	SIZE A
APRVD: BS		DATE: 09/16/17	SCALE: NONE	MODEL: N / A
			PART NO: 231443110F300T	REV. A
				SHEET 1/1

Foot Note:
 Globtek Inc. will not be liable for the safety and performance of these power product if unauthorized access and repair occurs. End user should consult the applicable UL, CSA or EN Standards for proper installation instruction.

Limitation of Use:
 Globtek product are not authorized for use as mission critical components in life support, hazardous environment, nuclear or aircraft applications without prior written approval from the CEO of Globtek Inc.

Contents of this document are subject to change without prior notice