


PROPRIETARY INFORMATION:  
 PROPRIETARY OF GLOBTEK, INC. ANY REPRODUCTION, DISCLOSURE OR  
 USE OF THIS DRAWING, IN WHOLE OR IN PART, IS HEREBY  
 PROHIBITED EXCEPT AS SPECIFIED IN WRITING BY GLOBTEK, INC.

REVISION		DATE	APPROVED
REV	DESCRIPTION		
A	INITIAL RELEASE, RFS. 25891, BS	04/24/15	hm

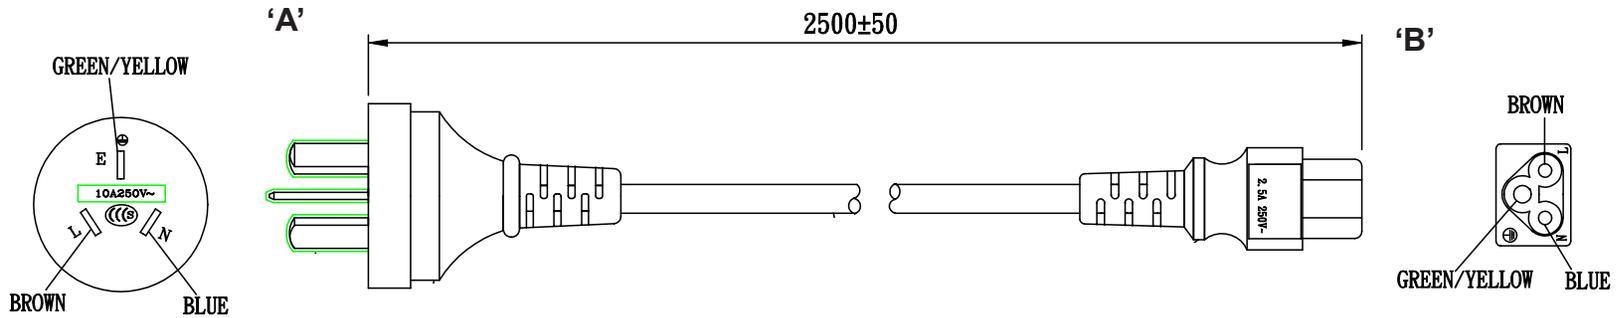


**GENERAL SPECIFICATIONS:**

- RATING: 2.5A / 250V
- CABLE TYPE / SIZE: RVV, 3 x 0.75 mm<sup>2</sup>
- TEMPERATURE RATING: 60° C
- CONDUCTOR COLORS: BROWN / BLUE / GREEN-YELLOW
- CABLE JACKET COLOR: BLACK
- OVERALL LENGTH (L): 2500 ± 50 mm
- CABLE OUTER DIAMETER: 6.0 ± 0.2 mm
- END 'A' TERMINATION: CHINA PLUG, CCC GR2099
- END 'B' TERMINATION: IEC 320/C5
- APPROVALS PLUG: CCC
- APPROVALS CABLE: CCC
- APPROVALS CONNECTOR: CCC

**PACKING:**

LOOSE HANK:

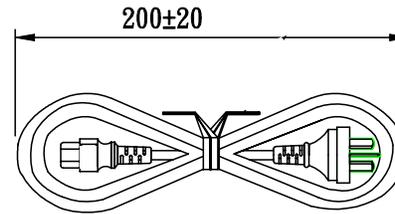

CHINA ROHS: COMPLIES WITH CHINA SJ/T 11363-2006



**NOTES:**

1. CORD AND PLUG MUST BE MARKED WITH APPROVAL SYMBOLS OR FILE NUMBER(S).



**RELEASED**  
 By N.Frost at 4:50 pm, Apr 24, 2015



DASH NO.	PART NO	REV.	DESCRIPTION	NOTES
<b>TABULATION BLOCK</b>				
			<b>GlobTek, Inc.</b> www.globtek.com 186 Veterans Dr. Northvale, NJ 07647 Tel. 201-784-1000 Fax 201.784.0111	
				DWG TITLE: CHINA TYPE DETACHABLE CORDSET
				REV. A
			PART NO: <b>6023592M5712(R)</b>	SHEET 1/1

Contents of this document are subject to change without prior notice

Foot Note:  
 Globtek Inc. will not be liable for the safety and performance of these power supplies if unauthorized access and repair occurs. End user should consult applicable UL, CSA or EN standards for proper installation instructions

Limitation of Use:  
 Globtek product are not authorized for use as mission critical components in life support, hazardous environment, nuclear or aircraft applications without prior written approval from the CEO of Globtek Inc.

INIT.BY: BS	DATE: 04/24/15	MILLIMETERS .xx +/- 0.3 .xxx +/- .013	ANGULAR +/- 1°
DRAWN: NF	DATE: 04/24/15	FSCN No.: G, T	SIZE A
APRVD: HM	DATE: 04/24/15	SCALE: NONE	