


PROPRIETARY INFORMATION:
 PROPRIETARY OF GLOBTEK, INC. ANY REPRODUCTION, DISCLOSURE OR
 USE OF THIS DRAWING, IN WHOLE OR IN PART, IS HEREBY
 PROHIBITED EXCEPT AS SPECIFIED IN WRITING BY GLOBTEK, INC.

REVISION			
REV	DESCRIPTION	DATE	APPROVED
A	INITIAL RELEASE	09/16/18	BS

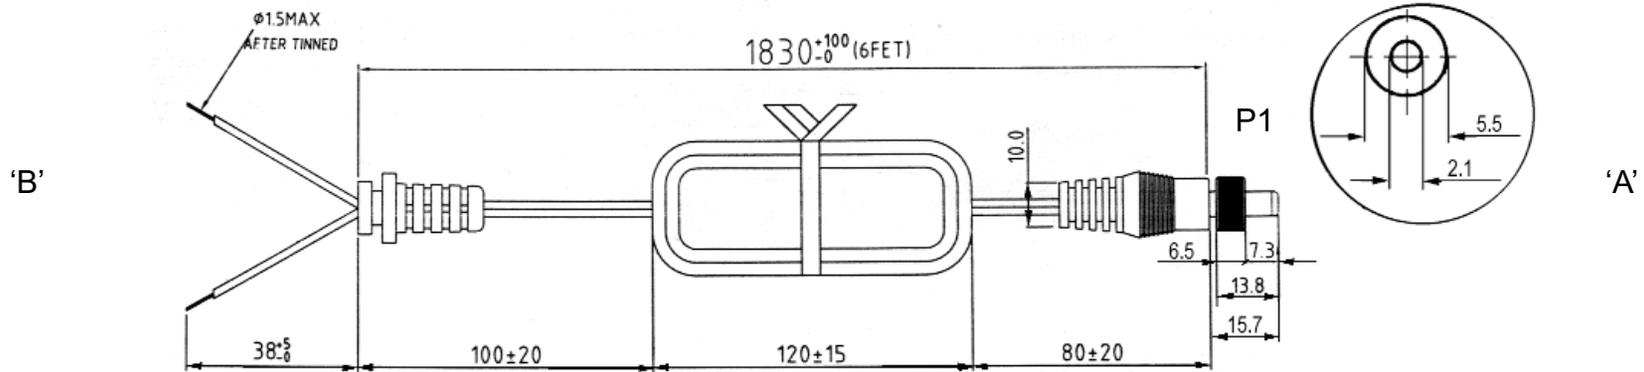

GENERAL SPECIFICATIONS:

CABLE TYPE / SIZE: SPT-1 CORD, 18 AWG X 2, STRANDED WIRE
 VW-1, 300V, 75°C RATED, PVC JACKET
 CABLE JACKET COLOR: BLACK
 POLARITY: IDENTIFIED CONDUCTOR (STRIPE OR RIB)
 IS TO BE CONNECTED TO CENTER OF BARREL.
 OVERALL LENGTH : 1830 +100, -0 mm
 CABLE OUTER DIAMETER: 2.7 x 5.4 ± 0.1 mm
 END 'A' TERMINATION (P1): LOCKING FEMALE BARREL 5.5 x 2.1 mm WITH THUMB SCREW 6.5 mm
 END 'B' TERMINATION: SEE TABLE
 STRAIN RELIEF: SR2 TYPE

PACKING:

BULK PACKED, BUNDLES OF 25.
 MAXIMUM SHIPPING CARTON WEIGHT IS 30 KG.

COLOR	SPLIT (mm)	STRIP& TIN(mm)
RIBBED	50	6
SMOOTH	50	6



NOTES:

- Dimensions are in mm unless specified otherwise.
- (P1) Standard DC Power Plug molded with Strain Relief per Standard tooling.
- Lead wires are to be stripped, twisted and tinned to length shown.

DASH NO.	PART NO	REV.	DESCRIPTION	NOTES
TABULATION BLOCK				
REV.			TOLERANCES: DECIMALS ANGULAR .xx +/- 0.01 +/- 1° .xxx +/- .005 MILLIMETERS ANGULAR .x +/- 1.0 +/- 1° .xx +/- 0.5	GlobTek, Inc. www.globtek.com 186 Veterans Dr. Northvale, NJ 07647 Tel. 201-784-1000 Fax 201.784.0111
SHEET				
INIT.BY: BS	DATE: 09/16/18	DWG TITLE: LOW VOLTAGE DC CORDSET LOCKING FEMALE BARREL 2.1 mm ID W/6.5 mm THUMB SCREW		
DRAWN: NF	DATE: 09/16/18	FSCN No.: G, CC	SIZE: A	REV. A
APRVD: BS	DATE: 09/16/18	SCALE: NONE	PART NO: CL91106F0A00(R)	SHEET 1/1

Foot Note:
 Globtek Inc. will not be liable for the safety and performance of these power product if unauthorized access and repair occurs. End user should consult the applicable UL, CSA or EN Standards for proper installation instruction.

Limitation of Use:
 Globtek product are not authorized for use as mission critical components in life support, hazardous environment, nuclear or aircraft applications without prior written approval from the CEO of Globtek Inc.

Contents of this document are subject to change without prior notice