


**PROPRIETARY INFORMATION:**  
 PROPRIETARY OF GLOBTEK, INC. ANY REPRODUCTION, DISCLOSURE OR  
 USE OF THIS DRAWING, IN WHOLE OR IN PART, IS HEREBY  
 PROHIBITED EXCEPT AS SPECIFIED IN WRITING BY GLOBTEK, INC.

REVISION

REV	DESCRIPTION	DATE	APPROVED
A	INITIAL RELEASE, RFS. 25444, DMR	03/24/14	HM
B	CHANGE TEMPERATURE FROM 85°C TO 80°C, RFS. 25625, DH	09/02/14	HM

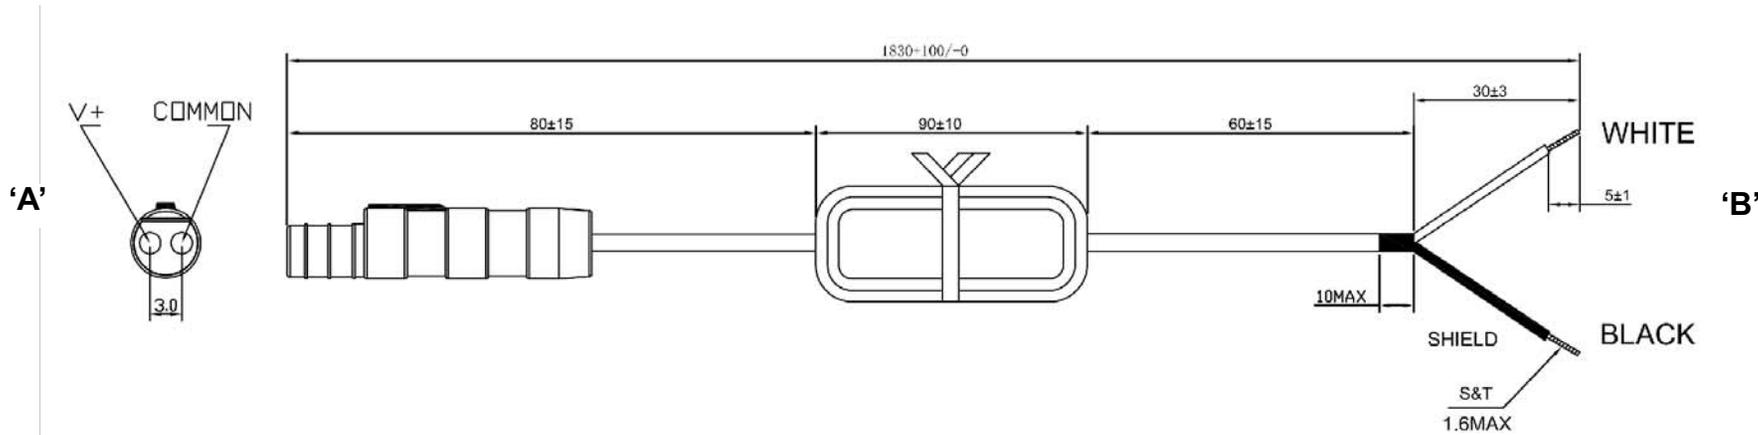

**GENERAL SPECIFICATIONS:**

CABLE TYPE / SIZE: 1C+SHIELD, 20 AWG, FEP, PTFE, PVC, TFE, NEOPENE, POLYIMIDE OR MARKED VW-1, 80°C,300V  
 TEMPERATURE RATING: 80°C MIN.  
 CABLE COLOR: BLACK / WHITE  
 CABLE JACKET COLOR: BLACK, VERY SOFT  
 OVERALL LENGTH : 1830 +100, -0 mm  
 END 'A' TERMINATION: IP68 WATERTIGHT CONNECTOR, GLOBTEK KF2 PLUG, KCC SK2/2 FEMALE, OR EQUIVALENT  
 END 'B' TERMINATION: SEE DRAWING ABOVE

**RELEASED**  
 By N.Frost at 1:20 pm, Sep 03, 2014

DASH NO.	PART NO	REV.	DESCRIPTION	NOTES
<b>TABULATION BLOCK</b>				
		<b>TOLERANCES:</b> DECIMALS ANGULAR .xx +/- 0.1 +/- 1° .xxx +/- .005		<b>GlobTek, Inc.</b> www.globtek.com 186 Veterans Dr. Northvale, NJ 07647 Tel. 201-784-1000 Fax 201.784.0111
		MILLIMETERS ANGULAR .xx +/- 0.3 +/- 1° .xxx +/- .013		
INIT.BY: DMR DATE: 03/24/14		DWG TITLE: CABLE ASSEMBLY WITH 2-PIN CONNECTOR		
DRAWN: NF DATE: 03/24/14		FSCN No.: G, CC SIZE A		MODEL: REV. B
APRVD: HM DATE: 03/24/14		SCALE: NONE		PART NO: <b>KF2PUJ1M8A00(R)</b> SHEET 1/1

**Foot Note:**  
 Globtek Inc. will not be liable for the safety and performance of these power product if unauthorized access and repair occurs. End user should consult the applicable UL, CSA or EN Standards for proper installation instruction.

**Limitation of Use:**  
 Globtek product are not authorized for use as mission critical components in life support, hazardous environment, nuclear or aircraft applications without prior written approval from the CEO of Globtek Inc.

Contents of this document are subject to change without prior notice