


PROPRIETARY INFORMATION:
 PROPRIETARY OF GLOBTEK, INC. ANY REPRODUCTION, DISCLOSURE OR
 USE OF THIS DRAWING, IN WHOLE OR IN PART, IS HEREBY
 PROHIBITED EXCEPT AS SPECIFIED IN WRITING BY GLOBTEK, INC.

REVISION			
REV	DESCRIPTION	DATE	APPROVED
A	INITIAL RELEASE	09/16/18	BS

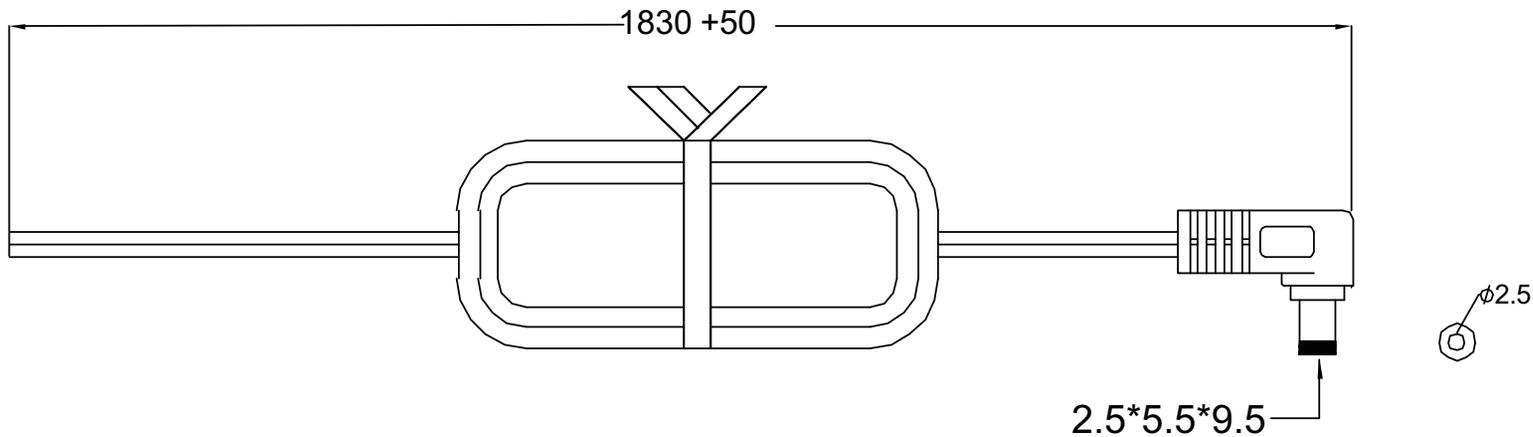

GENERAL SPECIFICATIONS:

CABLE TYPE / SIZE: # XT, 20 AWG X 2, FLAT CABLE
 TEMPERATURE RATING: 60°C MIN.
 CABLE JACKET COLOR: BLACK
 POLARITY: WIRE WITH WHITE (STRIPE OR RIB) IS CONNECTED TO FEMALE BARREL'S OUTER CONNECTION

OVERALL LENGTH (L): 1830 ± 50 mm
 CABLE OUTER DIAMETER: 2.5 x 5.0 ± 0.1 mm
 END 'A' TERMINATION: CUT BLUNT
 END 'B' TERMINATION: RIGHT ANGLE FEMALE BARREL 5.5 x 2.5 x 9.5 mm

PACKING:

BULK PACKED, BUNDLES OF 25.
 MAXIMUM SHIPPING CARTON WEIGHT IS 30 KG.

RELEASED
 By N.Frost at 8:11 am, Sep 18, 2018



DASH NO.	PART NO	REV.	DESCRIPTION	NOTES
TABULATION BLOCK				
		TOLERANCES: DECIMALS ANGULAR .xx +/- 0.1 +/- 1° .xxx +/- .005		GlobTek, Inc. www.globtek.com 186 Veterans Dr. Northvale, NJ 07647 Tel. 201-784-1000 Fax 201.784.0111
		MILLIMETERS ANGULAR .xx +/- 0.3 +/- 1° .xxx +/- .013		
INIT.BY: BS	DATE: 09/16/18	DWG TITLE: LOW VOLTAGE DC CORDSET WITH FEMALE BARREL CONNECTOR		REV. A
DRAWN: NF	DATE: 09/16/18	FSCN No.: G, CC	SIZE A	
APRVD: DMR	DATE: 09/16/18	SCALE: NONE	PART NO: LRA1806F000(R)	SHEET 1/1

Foot Note:
 Globtek Inc. will not be liable for the safety and performance of these power product if unauthorized access and repair occurs. End user should consult the applicable UL, CSA or EN Standards for proper installation instruction.

Limitation of Use:
 Globtek product are not authorized for use as mission critical components in life support, hazardous environment, nuclear or aircraft applications without prior written approval from the CEO of Globtek Inc.

Contents of this document are subject to change without prior notice