

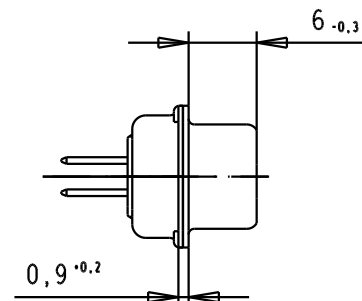
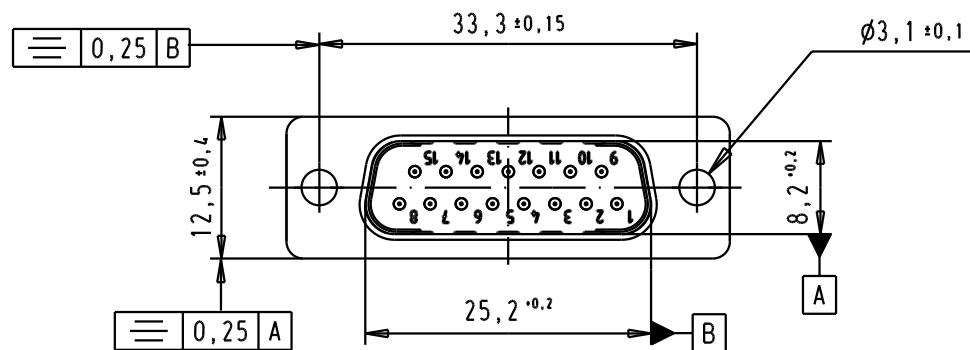
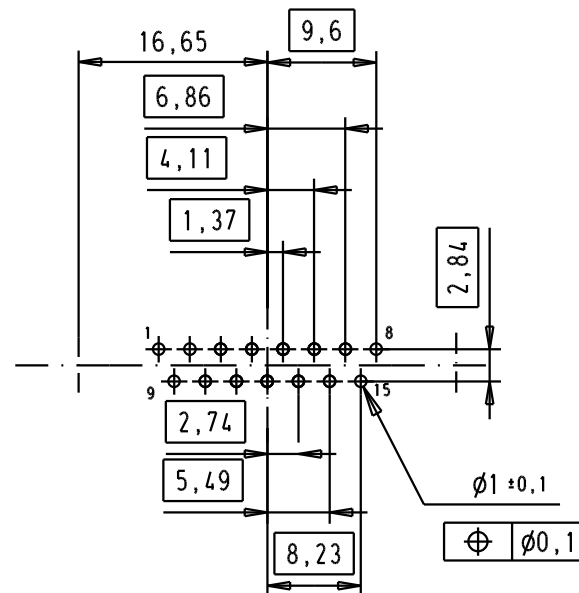


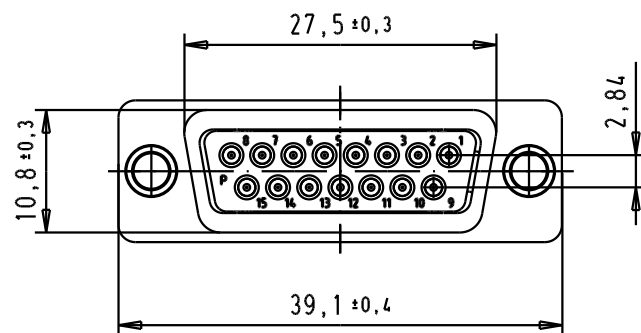

PCB Layout, Component side

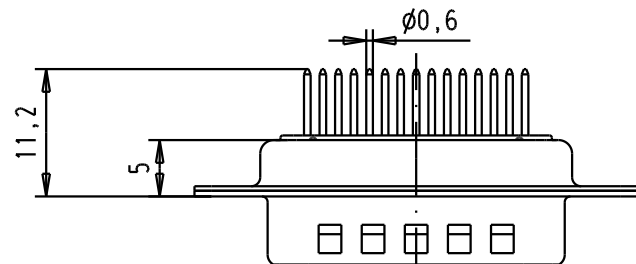

SPECIFICATION

Mating Cycles	500
Filter type	C
Capacitance	47pF±20%
Working Voltage	100v
Current Rating	7,5A
Insulation Resistance	>1GΩ

FREQUENCY (MHz)	ATTENUATION dB
5	-
10	-
50	-
100	-
500	30dB
1000	35dB

			Dat.	Name	 All Dim. in mm Orig. Size DIN A 4	D-Sub, male, straight, 15 Poles, solder pins, tin plated shell with dimples and holes	Mo/Mstlab/ Scale 1.5:1	
		Detail.	8- JUL -02	CV				
		Insp.						
		Stand.						
33267	17/11/05	JMDR	HARTING EURL F-95972 Paris				TB 09642227210	Blatt/ Page 1 / 1
31058	8- JUL -02	CV						
Mod.	Dat.	Name						