

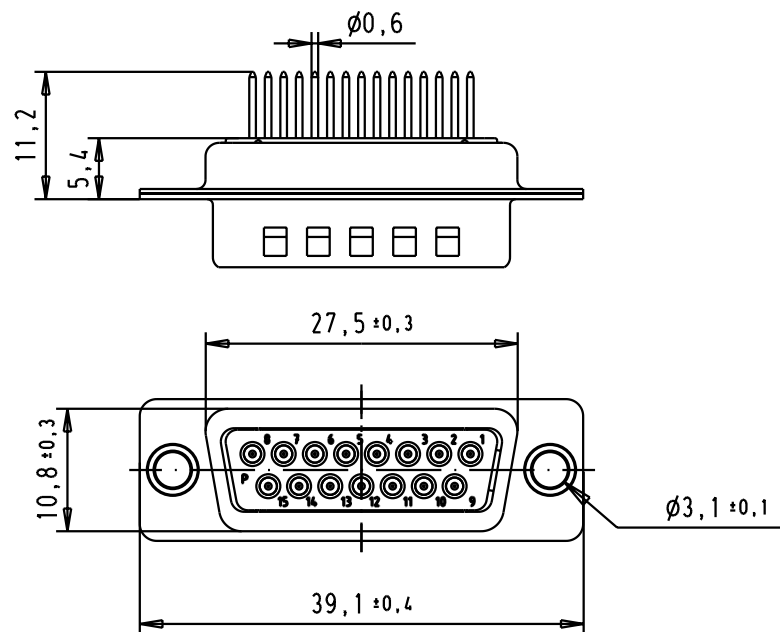


D


C

B

A

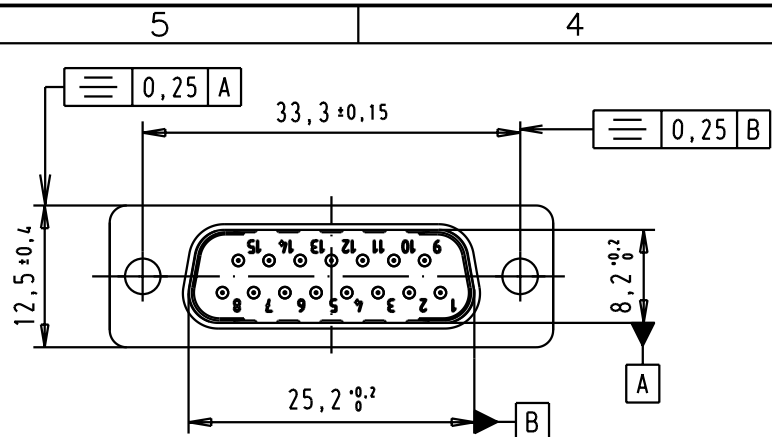

PCB Layout
Component side

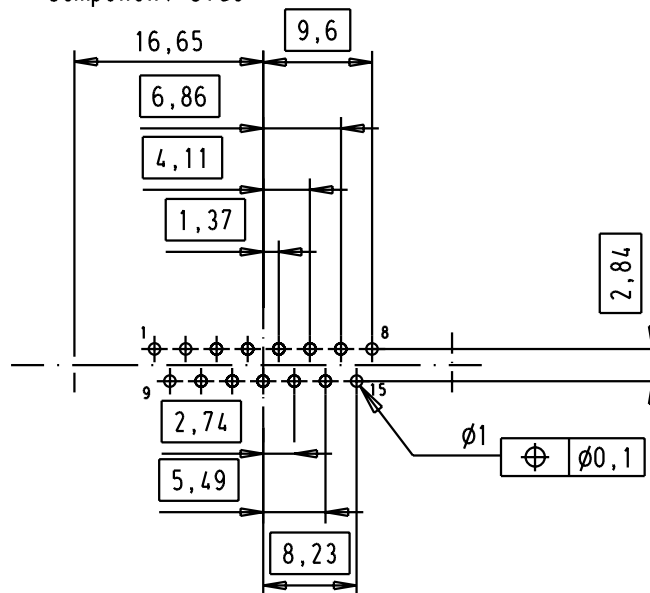


SPECIFICATION: C Filter

Mating Cycles	500
Capacitance	1000pf±20%
Working Voltage	100v
Current Rating	7.5A
Insulation Resistance	>1GΩ

Minimum insertion loss

FREQUENCY (MHz)	ATTENUATION (dB)
5	1dB
10	3dB
50	12dB
100	20dB
500	34dB
1000	30dB

				Dat.	Name	 All Dim. in mm Orig. Size DIN A 4
			Detail.	8-JUL-02	CV	
			Insp.			
			Stand.			
31570	07/11/03	AF				
31058	8-JUL-02	CV				
Mod.	Dat.	Name				

HARTING EURL
F-95972 Paris



D-Sub, male, straight,
15 Poles, with turned
solder pin and hole

TB 09642227230

Sub.

Mo?MsTab/
Scale

1.5:1

Blatt/ Page

1 / 1