

5

4

3

2




1

D

C

B

A

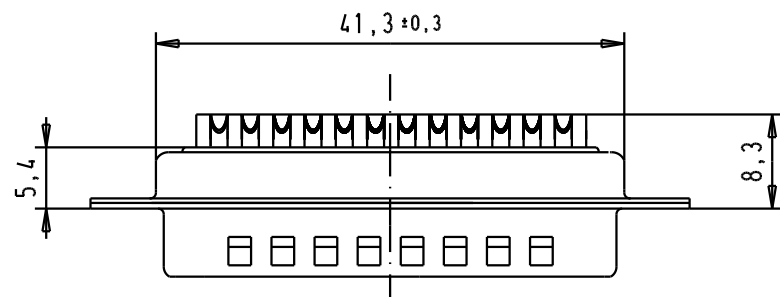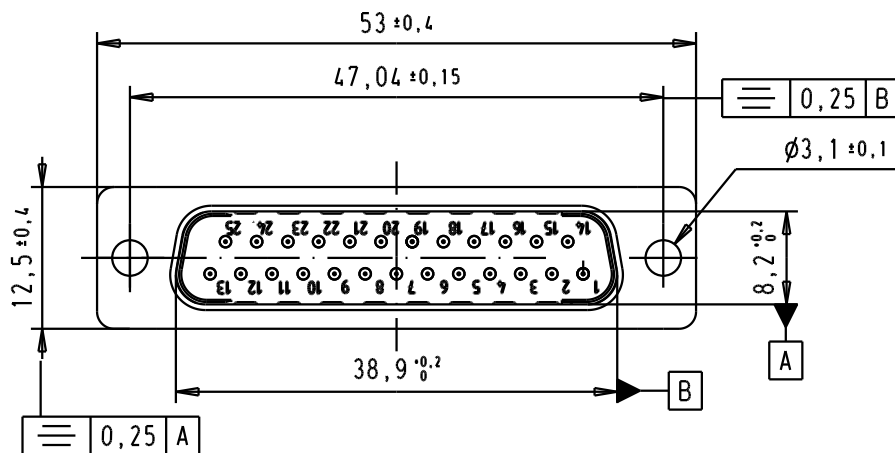


Solder bucket for AWG 20

SPECIFICATION

Filter type	C
Mating Cycles	500
Capacitance	$47\text{pf} \pm 20\%$
Working Voltage	100v
Current Rating	7.5A
Insulation Resistance	$>1\text{G}\Omega$

FREQUENCY (MHz)	ATTENUATION (dB)
5	-
10	-
50	-
100	-
500	30dB
1000	35dB

				Dat.	Name	 All Dim. in mm Orig. Size DIN A 4	D-Sub, male, straight, 25 Poles, with turned solder bucket and hole	Ma?Ms lab/ Scale 1.5:1
			Detail.	8-JUL-02	CV			
			Insp.					
			Stand.					
31897	17/05/04	AF	HARTING EURL F-95972 Paris				TB 09643217210	Blatt/ Page 1 / 1
31058	8-JUL-02	CV						
Mod.	Dat.	Name						

Sub.